


HIEROGLYPHIC ROCK –  
PROTECT DURING CONSTRUCTION

IG 15" IN =1,011.5  
IG 15" OUT=1,005.0

REINFORCE INLET AND OUTLET WITH  
6" TO 12" DIAMETER NATIVE STONES,  
OVER-EXCAVATE TO KEY STONES INTO  
SOILS, SUCH THAT EXPOSED FACES  
MATCH EXIST. GRADE TO +3" ABOVE.

SET THREE TO FOUR LARGER STONES  
RANDOMLY AT OUTFALL TO BREAK UP  
FLOW ENERGY, 15" TO 18" DIA.

FEATHER OUT NATIVE SOILS BETWEEN  
EDGE OF ROAD UP TO BASE OF ROCK  
PER PLAN. APPLY NATIVE SEED AND  
COVER WITH 4" STRAW ALL DISTURBED  
SURFACES.

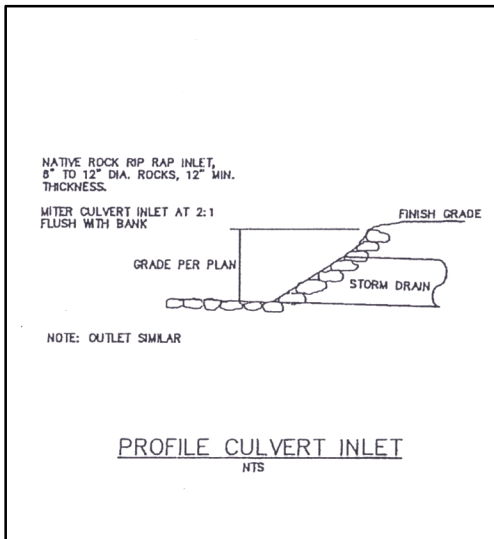

## ATTACHMENT D