

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

ORDER R5-2018-0025

WASTE DISCHARGE REQUIREMENTS  
FOR  
COUNTY OF MODOC  
ALTURAS CLASS III MUNICIPAL SOLID WASTE LANDFILL  
OPERATION  
MODOC COUNTY

The California Regional Water Quality Control Board, Central Valley Region (Central Valley Water Board) finds that:

1. The County of Modoc (Discharger) owns and operates the Alturas Class III Municipal Solid Waste Landfill (Facility or Alturas Class III Landfill) about two miles southwest of Alturas, in Sections 22 and 23, T42N, R12E, MDB&M, as shown in Attachment A. The Facility is a municipal solid waste (“MSW”) landfill regulated under authority given in Water Code section 13000 et seq.; and California Code of Regulations, title 27 (“Title 27”), section 20005 et seq. in accordance with State Water Resources Control Board (State Water Board) Resolution 93-62.
2. The Facility is on a 162-acre property at the intersection of North West Street and Westside Road, southwest of Alturas, designated as Assessor’s Parcel Numbers (“APN”) 022-130-40 and 022-130-44. Existing landfill area occupies approximately 28 acres. Waste was placed in six unlined waste management units (“WMUs”). A site map for the Facility, included as “Attachment B” is incorporated herein. .
3. The following documents are attached to this Order and hereby incorporated into and made a part of this Order by reference:
  - a. Attachment A – Site Location Map;
  - b. Attachment B – Site Map;
  - c. Information Sheet; and
  - d. Standard Provisions and Reporting Requirements (“SPRRs”), dated December 2015.
4. On 15 December 1999, the Discharger submitted an amended Report of Waste Discharge (“ROWD”) as part of the Joint Technical Document (“JTD”) for the landfill. The information in the ROWD/JTD has been used in updating these waste discharge requirements (“WDRs”). The ROWD contains the applicable information required in Title 27. The ROWD/JTD and supporting documents contain information related to this update of the WDRs.
5. On 14 June 2001, the Central Valley Water Board issued Order No. 05-01-174 in which the four landfill WMUs at the Facility were classified as “Class III” units for the discharge of non-hazardous waste and MSW. This Order continues to classify the landfill units as “Class III” units in accordance with Title 27.

6. The existing units authorized by this Order are described as follows:

<u>Unit</u>	<u>Area</u>	<u>Liner/LCRS<sup>1</sup>- Components</u>	<u>Unit Classification &amp; Status</u>
Unit A	7 acres	Unlined, no LCRS	Class III, inactive <sup>2</sup>
Unit B	15 acres	Unlined, no LCRS	Class III, active
Unit C	2.5 acres	Unlined, no LCRS	Class III, inactive
Dead Animal Unit	<1 acre	Unlined, no LCRS	Unclassified, active
Woodash/Metal Unit	2 acres	Unlined, no LCRS	Class III, inactive
Septage Ponds	<1 acre	Unlined, no LCRS	Unclassified, active

<sup>1</sup> “LCRS” – Leachate collection and removal system

<sup>2</sup> Inactive units have been covered with an interim soil cover until Facility closure.

7. On-site facilities at the Alturas Class III Landfill include: groundwater monitoring wells, public drop-off locations and a transfer station. The transfer station became operational in March 1995 and MSW currently is transported to a landfill near Reno, Nevada unless transportation is not possible due to weather or other unforeseen emergencies. The Discharger plans to operate the Facility for emergency backup disposal until 2047, or until Facility storage capacity is reached.
8. This Order implements the applicable regulations for discharges of solid waste to land through Prohibitions, Specifications, Provisions, and monitoring and reporting requirements. Prohibitions, Specifications, and Provisions are listed in Sections A through H of these WDRs below, and in the SPRRs. Monitoring and reporting requirements are included in the Monitoring and Reporting Program (“MRP”) R5-2018-0025 and in the SPRRs. In general, requirements that are either in regulation or otherwise apply to all MSW landfills are considered to be “standard” and are therefore in the SPRRs. Any site-specific changes to a requirement in the SPRRs are included in the applicable section (A through H) of these WDRs, and the requirement in the WDRs supersedes the requirement in the SPRRs.
9. Title 27 contains regulatory standards for discharges of solid waste promulgated by the State Water Board and the California Department of Resources Recovery and Recycling (“CalRecycle”). In certain instances, this Order cites CalRecycle-promulgated regulations. Title 27, section 20012 allows the Central Valley Water Board to cite CalRecycle regulations from Title 27 where necessary to protect water quality provided it does not duplicate or conflict with actions taken by the Local Enforcement Agency (“LEA”) in charge of implementing CalRecycle’s regulations.

### WASTE CLASSIFICATION AND UNIT CLASSIFICATION

10. The Discharger proposes to continue to discharge waste into the three active units at the Facility. Unit B receives inert construction and demolition waste, green waste and nonhazardous solid waste year-round (on an irregular basis by appointment), and MSW (on an emergency-only basis). The "Dead Animal Unit" receives dead animal carcasses. The "Septage Ponds" receive dewatered sludge from septage and toilet vault wastes. These wastes may be discharged only in accordance with Title 27 and Resolution 93-62 as required by this Order.
11. The Facility has three "Class III" WMUs that are inactive ("Unit A", "Unit C", and "Woodash/Metal Unit"). Unit A has been inactive since 1985, Unit C has been inactive since 1976, and the Woodash/Metal Unit has been inactive since 1989.
12. Active landfill units at the Facility are "existing units" under Title 27 that were permitted before 27 November 1984 and may continue to accept waste in the "Existing Footprint" until ready for closure unless waste receipts do not meet the timeframes and amounts in Title 27, section 21110, or they are required to close sooner to address environmental impacts or other regulatory concerns. The Existing Footprint as defined in Title 27, section 20164 is the area that was covered by waste. The Existing Footprint for the active areas of the Facility is shown on Attachment B.
13. Title 27, section 20690 allows the use of alternative daily cover ("ADC") at MSW landfills upon approval by the LEA and concurrence from CalRecycle. Title 27, section 20705 provides the Water Board's regulations for all daily and intermediate cover including that it shall minimize the percolation of liquids through waste and that the cover shall consist of materials that meet the landfill unit classification (Class III). At the time of issuance of this Order, no ADC materials have been approved.
14. Landfills propose new ADC materials regularly in order to preserve landfill air space and to beneficially reuse waste materials. Title 27, section 20686 includes regulations for beneficial reuse, including use of ADC. Approval of ADC is primarily handled by the LEA and CalRecycle under Title 27, section 20690. This Order allows any ADC proposed for use at the Facility after the adoption of this Order to be approved by Central Valley Water Board staff provided the Discharger has demonstrated it meets the requirements in Title 27, section 20705. The approved ADC materials should then be listed in the Facility's WDRs during the next regular update or revision with information about the Discharger's demonstration. This Order also includes a requirement that ADC only be used in internal areas of the landfill unless the Discharger demonstrates that runoff from the particular ADC is not a threat to surface water quality. The demonstration can take sedimentation basins into account.

### SITE DESCRIPTION

15. Topography at the site of the Facility ranges from approximately 4,380 to 4,450 feet above mean sea level ("MSL") and consists of gently sloping ridges and hills. The Facility generally slopes to the east toward the Pit River. No springs have been observed at the Facility, or within one mile of the perimeter of the Facility.

16. Land uses within one mile of the Facility include agricultural fields, open space, and federal game refuge to the north, south, east and west. Within the Facility footprint, the Modoc County Sheriff's Department uses an outbuilding to store equipment and vehicles. The outbuilding is locked and located approximately 200 feet to the northeast of Unit A. The nearest residence is located approximately 1/2 mile east of the Facility.
17. There are 39 municipal, domestic, industrial, or agricultural groundwater supply wells that have been identified within one mile of the Facility.
18. The Facility is primarily underlain by volcanic deposits belonging to the Warm Springs Tuff member of the Alturas Formation. These deposits include loose, unconsolidated clayey sands, gravels, tuffs, and breccias. A thin layer of soil (one to two feet thick) exists over the Facility. The tuffs and breccias are workable with heavy equipment and contain the waste disposal trenches. Field observations indicate permeability is relatively high and influenced locally by cracks and fissures.
19. The measured hydraulic conductivity of the native soils underlying the landfill units ranges between  $5 \times 10^{-5}$  and  $1 \times 10^{-4}$  centimeters per second ("cm/s").
20. The controlling maximum probable earthquake ("MPE") for the Facility is a moment of magnitude 6.5 event along the Fitzhugh Creek Fault at a closest rupture distance of six miles from the Facility. It is estimated that a MPE event would produce a peak ground acceleration of 0.3g at the Facility with a return period of 475 years.
21. The Facility receives an annual average of 12 inches of precipitation as rainfall and 17 inches as snowfall, as measured at the KAAAT Station in Alturas, California. The mean pan evaporation is approximately 51 inches per year as measured at the TLKC Station in Tulelake, California.
22. The 100-year, 24-hour precipitation event for the Facility is estimated to be 3.5 inches, based on precipitation features published by the National Oceanic and Atmospheric Administration ("NOAA") in *NOAA Atlas 2, Volume XI, Isopluvials of 100-Year 24-Hour Precipitation for Northern Half of California in Tenths of an Inch*.
23. The Facility is not within a 100-year flood plain based on the Federal Emergency Management Agency's ("FEMA") Flood Insurance Rate Map, Community-Panel Number 06049C1483F.
24. Storm water sedimentation basins are located along the western perimeter, separating Unit C from the Septage Ponds, as shown on Attachment B. The basins detain storm water for sedimentation control during the rainy season and are normally dry during the summer months. The sedimentation basins typically do not discharge, but may discharge to the Pit River.

#### **SURFACE WATER AND GROUNDWATER CONDITIONS**

25. The *Water Quality Control Plan for Sacramento and San Joaquin River Basins, Fourth Edition* ("Basin Plan"), designates beneficial uses, establishes water quality objectives ("WQOs"), and contains implementation plans and policies for all waters of the Basin.

26. Surface water drainage from the Facility is to the Pit River in the Upper Pit River Hydrologic Area of the Sacramento River Hydrologic Region.
27. The designated beneficial uses of the Pit River as specified in the Basin Plan, are: municipal and domestic supply; agricultural supply; water contact recreation; non-contact water recreation; warm freshwater habitat; cold freshwater habitat; wildlife habitat; spawning, reproduction, and/or early development.
28. The first encountered groundwater ranges from about four feet to 31 feet below the native ground surface. Groundwater elevations range from about 4,348 feet MSL to 4,356 feet MSL. The principal water-bearing formations in the Alturas Groundwater Basin are lava flows and the Alturas Formation, which contains both confined and unconfined aquifers.
29. Monitoring data indicate background groundwater quality for first encountered groundwater has electrical conductivity ("EC") ranging between 400 and 5,000 micromhos/cm, with total dissolved solids ("TDS") ranging between 200 and 3,000 milligrams per liter ("mg/L").
30. The direction of groundwater flow is generally toward the northwest. The direction of groundwater flow varies seasonally and periodically flows toward the north and northeast. The estimated average groundwater gradient varies from approximately 0.002 to 0.004 feet per foot.
31. The designated beneficial uses of the groundwater, as specified in the Basin Plan, are domestic and municipal water supply, agricultural supply, industrial service supply, and industrial process supply.

#### **GROUNDWATER AND UNSATURATED ZONE MONITORING**

32. The existing groundwater monitoring network for the Facility's WMUs consists of background monitoring wells OB-5 and OB-6, and detection monitoring wells OB-1 through OB-4 and OB-7. Wells OB-1 through OB-5 were installed in April 1987 into three different geologic formations. Wells OB-1 and OB-5 are screened in volcanic deposits of the Warm Springs Tuff Formation, wells OB-3 and OB-4 are screened in silt and clay deposits of the Alturas Formation, and OB-2 is screened in sand and gravel deposits of intermediate alluvium. Monitoring wells OB-6 and OB-7 were installed in September 2000 into a geologic formation suspected of being similar to the formation monitored by well OB-2. Monitoring well OB-6 was installed off-site on Modoc National Wildlife Refuge property north of the Facility to provide background water quality data. Total depths of the wells range from 15 to 56.5 feet below ground surface.
33. At the time this Order was adopted, the Discharger's detection monitoring program ("DMP") for groundwater at the Facility does not satisfy the requirements contained in Title 27. The current DMP does not have a complete Water Quality Protection Standard ("WQPS). (Cal. Code Regs, tit. 27, §20390.) Concentration limits have not been established and the Facility does not have a written statistical procedure for evaluating the groundwater data as specified in MRP No. R5-2018-0025 and the Standard Monitoring Specifications in Section I of the SPRRs. Provision 7 requires submittal of an updated WQPS Report.

34. No unsaturated zone monitoring system exists at the Facility. Title 27, section 20415, subdivision (d)(5) requires unsaturated zone monitoring for all new Units. However, no new WMUs or lateral expansions are planned at the Facility.
35. Volatile organic compounds (“VOCs”) are often detected in a release from a MSW landfill and are often associated with releases of landfill gas rather than leachate. Since VOCs are not naturally occurring and thus have no background value, they are not amenable to the statistical analysis procedures contained in Title 27 for the determination of a release of wastes from a landfill unit. Title 27, section 20415, subdivisions (e)(8) and (9) allows the use of a non-statistical evaluation of monitoring data that will provide the best assurance of the earliest possible detection of a release from a landfill unit in accordance with Title 27, section 20415, subdivisions (b)(1)(B)2.-4. However, Title 27 does not specify a specific method for non-statistical evaluation of monitoring data.
36. The Central Valley Water Board may specify a non-statistical data analysis method pursuant to Title 27, section 20080, subdivision (a)(1). Water Code section 13360, subdivision (a)(1) allows the Central Valley Water Board to specify requirements to protect groundwater or surface waters from leakage from a solid waste site, which includes a method to provide the best assurance of determining the earliest possible detection of a release.
37. In order to provide the best assurance of the earliest possible detection of a release of non-naturally occurring waste constituents from a landfill unit, the SPRRs specify a non-statistical method for the evaluation of monitoring data for non-naturally occurring compounds. The specified non-statistical method for evaluation of monitoring data provides two criteria (or triggers) for making the determination that there has been a release of non-naturally occurring waste constituents from a landfill unit. The presence of two non-naturally occurring waste constituents above their respective method detection limit (“MDL”), or one non-naturally occurring waste constituent detected above its practical quantitation limit (“PQL”) [a.k.a, laboratory reporting limit (“RL”)], indicates that a release of waste from a unit has occurred. Following an indication of a release, verification testing must be conducted to determine whether there has been a release from the landfill unit or the detection was a false detection. The detection of two non-naturally occurring waste constituents above the MDL as a trigger is appropriate due to the higher risk of false-positive analytical results and the corresponding increase in sampling and analytical expenses from the use of one non-naturally occurring waste constituent above its MDL as a trigger.
38. For a naturally occurring constituent of concern (“COC”), Title 27 requires concentration limits for each COC be determined as follows:
  - a. By calculation in accordance with a statistical method pursuant to Title 27, section 20415, subdivision (e)(8)(A-D); or
  - b. By an alternate statistical method meeting the requirements of Title 27, section 20415, subdivision (e)(8)(E).
39. The Discharger has not submitted a WQPS Report proposing statistical data analysis methods to calculate concentration limits for each monitored constituent in accordance with Title 27. Provision 7 requires submittal of an updated WQPS Report that includes this content.

### **GROUNDWATER CONDITIONS**

40. Natural variations in water quality have been documented in wells drilled at and near the Facility. For example, TDS can range from about 200 to over 3,000 mg/L. While spatial and seasonal variability exists, trend analysis of Facility monitoring wells has not indicated any increases in monitoring parameters. Groundwater conditions at the Facility have historically shown no indications of a release from any of the WMUs. There have been no indications of leachate influence in groundwater around the Facility.
41. Until 2017, VOCs had not been detected at the Facility since the late 1990s and were infrequently encountered at that time. In the First Half 2017 Groundwater Monitoring Report, the Discharger indicated that low concentrations of gasoline-related VOCs were detected in monitoring wells OB-3 and OB-7, including ethylbenzene, toluene and xylenes. A single semi-volatile organic compound ("SVOC") was also detected in well OB-7 [bis(2-ethylhexyl) phthalate]. A resampling of all Facility monitoring wells in October 2017 did not detect VOCs or SVOCs, suggesting that these detections were a result of laboratory contamination.

### **LINER PERFORMANCE DEMONSTRATION**

42. On 15 September 2000, the Central Valley Water Board adopted Resolution No. 5-00-213 *Request For The State Water Resources Control Board To Review The Adequacy Of The Prescriptive Design Requirements For Landfill Waste Containment Systems To Meet The Performance Standards Of Title 27*. The State Water Board responded, in part, that "a single composite liner system continues to be an adequate minimum standard" however, the Central Valley Water Board "should require a more stringent design in a case where it determines that the minimum design will not provide adequate protection to a given body of groundwater."

In a letter dated 17 April 2001, the Executive Officer notified Owners and Operators of Solid Waste Landfills that "the Board will require a demonstration that any proposed landfill liner system to be constructed after 1 January 2002 will comply with Title 27 performance standards. A thorough evaluation of site-specific factors and cost/benefit analysis of single, double, and triple composite liners will likely be necessary."

43. The Facility's WMUs are unlined and predate the requirements set forth under Title 27, section 20080, subdivision (d) established in 1984. The Discharger has not proposed expansion beyond the existing footprint. Any such expansion proposed in the future must be done in accordance with Title 27 and Resolution 93-62, as required by Facility Specifications and Construction Specifications contained in this Order.

### **CONSTRUCTION AND ENGINEERED ALTERNATIVE**

44. On 17 June 1993, the State Water Board adopted Resolution 93-62 implementing a State Policy for the construction, monitoring, and operation of MSW landfills that is consistent with the federal MSW regulations promulgated under 40 Code of Federal Regulations section 258 (a.k.a, Subtitle D). Resolution 93-62 requires the construction of a specified composite liner system at new MSW landfills, or expansion areas of existing MSW landfills, that receive wastes after 9 October 1993. Resolution 93-62 also allows the Central Valley Water Board to consider the approval of engineered alternatives to the prescriptive standard. Section III.A.b. of Resolution

93-62 requires that the engineered alternative liner systems be of a composite design similar to the prescriptive standard.

45. Title 27, section 20080, subdivision (b) allows the Central Valley Water Board to consider the approval of an engineered alternative to the prescriptive standard. In order to approve an engineered alternative in accordance with Title 27, section 20080, subdivision (c)(1) or (2), the Discharger must demonstrate that the prescriptive design is unreasonably and unnecessarily burdensome and will cost substantially more than an alternative which will meet the criteria contained in Title 27, section 20080, subdivision (b), or would be impractical and would not promote attainment of applicable performance standards. The Discharger must also demonstrate that the proposed engineered alternative liner system is consistent with the performance goal addressed by the particular prescriptive standard, and provides protection against water quality impairment equivalent to the prescriptive standard in accordance with Title 27, section 20080, subdivision (b)(2).
46. Water Code section 13360, subdivision (a)(1) allows the Central Valley Water Board to specify the design, type of construction, and/or particular manner in which compliance must be met in WDRs or orders for the discharge of waste at solid waste disposal facilities.
47. The Discharger has not proposed expansion beyond the existing footprint. Any such expansion proposed in the future must be done in accordance with Title 27 and Resolution 93-62, as required by the Facility Specifications and Construction Specifications contained in this Order.
48. Closure construction will include placement of a final cover over the six WMUs (Units A, B, and C; Wood Ash/Metal Unit; Dead Animal Unit; and Septage Ponds). The final cover design will be provided with the Final Closure Plan, which shall be submitted for review and approval at least two years prior to actual closure.
49. The 15 December 1999 ROWD does not include a stability analysis for the Facility pursuant to Title 27, section 21750, subdivision (f)(5) because the WMUs pre-date this requirement.

#### **LANDFILL CLOSURE**

50. Title 27, section 21090 provides the minimum prescriptive final cover components for landfills consisting of, in ascending order, the following layers:
  - a. Two-foot soil foundation layer.
  - b. One-foot soil low flow-hydraulic conductivity layer, less than  $1 \times 10^{-6}$  cm/s or equal to the hydraulic conductivity of any bottom liner system.
  - c. Geomembrane layer (this layer is required for composite-lined landfills for equivalency to bottom liner).
  - d. One-foot soil erosion resistant/vegetative layer.
51. Title 27 allows engineered alternative final covers provided the alternative design will provide a correspondingly low flow-through rate throughout the post-closure maintenance period.
52. The Discharger has submitted a 15 December 1999 ROWD which included provisions for preliminary closure and post-closure maintenance of the WMUs at the Facility. The Discharger

plans to operate the Facility for emergency backup disposal until approximately 2047, or until Facility storage capacity is reached. Unit A, Unit C, and the Woodash/Metal Unit stopped receiving waste in 1985, 1976, and 1989, respectively, and have been covered with an interim soil cover until Facility closure. The interim cover consists of one foot of native soils excavated from borrow areas within the Facility. Unit B still receives inert construction and demolition waste, and green waste, and may receive emergency non-hazardous waste or MSW in the event that waste transfer to an off-site landfill is not possible.

53. The Discharger proposes a prescriptive final cover for the unlined landfill units consisting of, in ascending order, the following layers:
  - a. Two-foot soil foundation layer.
  - b. One-foot soil compacted clay soil layer with less than  $1 \times 10^{-6}$  cm/s hydraulic conductivity.
  - c. One-foot soil erosion resistant soil layer, with vegetation.
54. Side slopes for the closed landfill will be sloped at a maximum of 3H:1V, and will include 15-foot wide benches every 50 vertical feet as required by Title 27.
55. A slope stability analysis for the proposed final cover has not been performed. The Standard Closure and Post-Closure Specifications in the SPRRs identify the stability analysis requirements for the final cover.
56. Pursuant to Title 27, section 21090, subdivision (e)(1), this Order requires a survey of the final cover following closure activities for later comparison with iso-settlement surveys required to be conducted every five years.
57. This Order approves the proposed final cover and requires that a final closure and post-closure maintenance plan, design documents, and construction quality assurance ("CQA") plan be submitted for review and approval at least two years prior to actual closure.

#### **LANDFILL POST-CLOSURE MAINTENANCE**

58. The Discharger's 15 December 1999 ROWD includes the *Preliminary Closure and Post Closure Maintenance Plan* ("PCPCMP"). The plan includes inspection, maintenance, and monitoring of the Facility during the post-closure maintenance period, and includes a post-closure maintenance cost estimate for the entire Facility. Inspection and maintenance will include the condition of the final cover, drainage features, groundwater monitoring wells, access roads and site security. The plan will be implemented for a minimum period of 30 years or until the waste no longer poses a threat to environmental quality, whichever is greater.
59. Once every five years during the post-closure maintenance period, aerial photographic maps of the closed landfill area will be made to identify and evaluate landfill settlement. Iso-settlement maps will be prepared to determine the amount of differential settlement occurring over the previous five years. Pursuant to Title 27, section 21090, subdivision (e)(2), this Order requires iso-settlement maps to be prepared and submitted every five years.
60. The completed final cover will be periodically tested for damage or defects by monitoring surface emissions pursuant to California Code of Regulations, title 17, section 95471, subdivision (c)

and Title 27, section 21090, subdivision (a)(4)(A). Defects will be repaired and tested for adequacy based on the closure CQA Plan.

### FINANCIAL ASSURANCES

61. Title 27, sections 21820 and 22206 require a cost estimate for landfill closure. The cost estimate must be equal to the cost of closing the landfill at the point in its active life when the extent and manner of operation would make closure the most expensive. When closing units in phases, the estimate may account for closing only the maximum area or unit of a landfill open at any time. The Discharger's 15 December 1999 ROWD includes a PCPCMP with a cost estimate for landfill closure. The lump sum estimate is for the cost to close the largest future area needing closure at any one time. The total amount of the closure cost estimate in 1999 dollars is \$1,061,900. This Order requires that the Discharger maintain financial assurance with CalRecycle in at least the amount of the closure cost estimate. As of 2017, the lump sum estimate was \$1,761,462, while the balance of the closure fund was \$685,419. This closure fund is an enterprise fund, which is contributed to on a yearly basis. On each anniversary of the establishment of the fund, the minimum fund balance is increased. Based on current landfill capacity and the projected closure date, the balance within the closure fund is adequate.
62. Title 27, sections 21840 and 22211 require a cost estimate for landfill post-closure maintenance. The Discharger's 15 December 1999 PCPCMP includes a cost estimate for landfill post-closure maintenance. The amount of the cost estimate for post-closure maintenance in 1999 dollars is \$471,000. This Order requires that the Discharger maintain financial assurance with CalRecycle in at least the amount of the post-closure maintenance cost estimate adjusted annually for inflation. As of 2017, the balance of the post-closure maintenance fund was \$1,302,174.
63. Title 27, section 22221 requires a cost estimate for corrective action of all known or reasonably foreseeable releases. The Discharger submitted a 27 November 2001 cost estimate of \$799,784 for corrective action of all known or reasonably foreseeable releases. This Order requires that the Discharger maintain financial assurance with CalRecycle in at least the amount of the cost estimate adjusted annually for inflation. As of 2017, the balance of the corrective action fund was \$940,011.
64. Title 27, section 22100, subdivision (b) requires owners and operators of disposal facilities that are required to be permitted as solid waste landfills to provide cost estimates for initiating and completing corrective action for known or reasonably foreseeable releases of waste. Title 27, section 22101 requires submittal of a *Water Release Corrective Action Estimate* and a *Non-Water Release Corrective Action Cost Estimate*. The *Water Release Corrective Action Estimate* is for scenarios where there is statistically significant evidence of a release of waste to ground or surface water when comparing point-of-compliance analyte concentrations to background concentrations. The *Non-Water Release Corrective Action Cost Estimate* is for complete replacement of the landfill final cover system, however a site-specific corrective action plan pursuant to Title 27, section 22101, subdivision (b)(2) may be provided in lieu of the final cover replacement cost estimate. Title 27, section 22221 requires establishment of financial assurances in the amount of an approved *Water Release Corrective Action Estimate* or an approved *Non-Water Release Corrective Action Cost Estimate*, whichever is greater.

### CEQA AND OTHER CONSIDERATIONS

65. The action to revise WDRs for this existing Facility is exempt from the provisions of the California Environmental Quality Act ("CEQA"), Public Resource Code section 21000, et seq., and the CEQA guidelines, in accordance with Title 14, section 15301.
66. This Order implements:
  - a. *The Water Quality Control Plan for the Sacramento River and San Joaquin River Basins, Fourth Edition*;
  - b. The prescriptive standards and performance goals of California Code of Regulations, title 27, section 20005 et seq., effective 18 July 1997, and subsequent revisions; and
  - c. State Water Board Resolution 93-62, *Policy for Regulation of Discharges of Municipal Solid Waste*, adopted 17 June 1993, and revised on 21 July 2005.
67. Based on the threat and complexity of the discharge, the Facility is determined to be classified 2-B as defined below:
  - a. Category 2 threat to water quality, defined as, "Those discharges of waste that could impair the designated beneficial uses of the receiving water, cause short-term violations of WQOs, cause secondary drinking water standards to be violated, or cause a nuisance."
  - b. Category B complexity, defined as, "Any discharger not included in Category A that has physical, chemical, or biological treatment systems (except for septic systems with subsurface disposal), or any Class 2 or Class 3 waste management units."
68. The *Statement of Policy with Respect to Maintaining High Quality of Waters in California*, SWRCB Order WQ 68-16 (hereinafter "Anti-Degradation Policy") was adopted by the State Water Board in October 1968. Anti-Degradation Policy limits the Board's discretion to authorize the degradation of "high-quality waters." This policy has been incorporated into the Board's Basin Plans. "High-quality waters" are defined as those waters where water quality is more than sufficient to support beneficial uses designated in the Board's Basin Plan. Whether or not a water is a high-quality water is established on a constituent-by-constituent basis, which means that an aquifer can be considered a high-quality water with respect to one constituent, but not for others. (SWRCB Order No. WQ 91-10.)
69. Anti-Degradation Policy applies when an activity discharges to high quality waters and will result in some degradation of such high quality waters. When it applies, the Policy requires that WDRs reflect best practicable treatment or control ("BPTC") of wastes and that any degradation of high quality waters (a) will be consistent with the maximum benefit to the people of the State, and (b) will not result in an exceedance of WQOs. If the activity will not result in the degradation of high quality waters, Anti-Degradation Policy does not apply, and the Discharger need only demonstrate that it will use "best efforts" to control the discharge of waste.
70. Anti-Degradation Policy does apply to the discharge of waste to the Alturas Class III Landfill due to the presence of unlined WMUs at the Facility. The requirements of this Order are designed to ensure that any such wastes remain contained at the Facility and will not reach waters of the

State. The requirements of this Order reflect the Discharger's best efforts to control such wastes. Confirmed detections of VOCs have not occurred since the late 1990s and leachate effects have not been observed in groundwater beneath the Facility. The potential for release of waste constituents is expected to continue to decrease over time. Compliance with this Order, the attached SPRRs, and MRP R5-2018-0025 represent BPTC of the discharge of waste to waters of the State. Therefore, the Facility complies with the Anti-Degradation Policy.

71. Any degradation that may result from the Facility's discharges to waters of the State would be consistent with the maximum benefit to the people of the State. Avoiding or preventing such degradation would require unearthing and re-engineering the facility at significant expense to the County. From a water quality standpoint, implementing the BPTC measures required under this Order is a more effective use of the Discharger's limited resources.
72. Water Code section 13267, subdivision (b) provides that: "In conducting an investigation specified in subdivision (a), the Regional Board may require that any person who has discharged, discharges, or is suspected of having discharge or discharging, or who proposes to discharge waste within its region, or any citizen or domiciliary, or political agency or entity of this state who has discharged, discharges, or is suspected of having discharged or discharging, or who proposes to discharge waste outside of its region that could affect the quality of the waters of the state within its region shall furnish, under penalty of perjury, technical or monitoring program reports which the board requires. The burden, including costs of these reports, shall bear a reasonable relationship to the need for the reports and the benefits to be obtained from the reports.
73. The technical reports required by this Order and the attached MRP R5-2018-0025 are necessary to assure compliance with these WDRs. The Discharger owns and operates the Facility that discharges the waste subject to this Order. Typical annual costs of the Facility monitoring program range from \$11,000 to \$16,000 and are commensurate with similar programs at other landfills throughout the state. The Central Valley Water Board finds that, given the necessity of obtaining accurate and up to date information to inform management of this Facility's discharges, these costs bear a reasonable relationship to the benefit and need for the reports required by the MRP.

#### **PROCEDURAL REQUIREMENTS**

74. All local agencies with jurisdiction to regulate land use, solid waste disposal, air pollution, and to protect public health have approved the use of this Facility for the discharges of waste to land stated herein.
75. The Central Valley Water Board notified the Discharger and interested agencies and persons of its intent to prescribe WDRs for this discharge, and has provided them with an opportunity for a public hearing and an opportunity to submit their written views and recommendations.
76. The Central Valley Water Board, in a public meeting, heard and considered all comments pertaining to the discharge.
77. Any person aggrieved by this action of the Central Valley Water Board may petition the State Water Board to review the action in accordance with Water Code section 13320 and California

Code of Regulations, title 23, sections 2050 and following. The State Water Board must receive the petition by 5:00 p.m., 30 days after the date that this Order becomes final, except that if the thirtieth day following the date that this Order becomes final falls on a Saturday, Sunday, or state holiday, the petition must be received by the State Water Board by 5:00 p.m. on the next business day. Copies of the law and regulations applicable to filing petitions may be found on the Internet at:

[http://www.waterboards.ca.gov/public\\_notices/petitions/water\\_quality](http://www.waterboards.ca.gov/public_notices/petitions/water_quality)

or will be provided upon request.

IT IS HEREBY ORDERED, pursuant to California Water Code sections 13263 and 13267, that Order No. 05-01-174 is rescinded except for purposes of enforcement, and that the County of Modoc, its agents, successors, and assigns, in order to meet the provisions of Division 7 of the California Water Code and the regulations adopted thereunder, shall comply with the following:

**A. PROHIBITIONS**

1. The discharge of 'hazardous waste' or 'designated waste' is prohibited. For the purposes of this Order, the term 'hazardous waste' is as defined in California Code of Regulations, Title 23, section 2510 et seq., and 'designated waste' is as defined in Title 27.
2. The cessation of any corrective action measure is prohibited without written Executive Officer approval. If routine maintenance or a breakdown results in cessation of corrective action for greater than 24 hours, the Discharger shall notify Board staff. At the time of issuance of this Order, no corrective action measures were in place.
3. The Discharger shall comply with all Standard Prohibitions listed in Section C of the SPRRs.

**B. DISCHARGE SPECIFICATIONS**

1. The Discharger shall only discharge the wastes including inert construction and demolition waste, green waste, dead animal carcasses, and septage. The Discharger shall only discharge MSW during emergency conditions when the waste cannot be transported to an off-site landfill.

<b>WASTE ACCEPTANCE BY LANDFILL UNITS</b>						
<b>Title 27 Waste Type</b>	<b>Unit A</b>	<b>Unit B</b>	<b>Unit C</b>	<b>Woodash/Metal Unit</b>	<b>Dead Animal Unit</b>	<b>Septage Ponds</b>
MSW	No	Yes <sup>2</sup>	No	No	No	No
Inert (e.g., concrete, cured asphalt, brick)	No	Yes	No	No	No	No

<b>Title 27 Waste Type</b>	<b>Unit A</b>	<b>Unit B</b>	<b>Unit C</b>	<b>Woodash/Metal Unit</b>	<b>Dead Animal Unit</b>	<b>Septage Ponds</b>
Green waste	No	Yes	No	No	No	No
Liquid septage and toilet vault wastes	No	No	No	No	No	Yes
Special Wastes <sup>1</sup>	No	No	No	No	Yes	No

1. Special wastes as defined by Title 27 (e.g. triple-rinse pesticide containers, tires, large dead animals, medical wastes, Incinerator ash, and agricultural wastes)
2. MSW discharged under emergency conditions only

2. The Discharger may not use any material as ADC until the Discharger has demonstrated it meets the requirements in Title 27, section 20705, and the Discharger has received written approval that it may begin using the material as ADC.
3. The Discharger shall use approved ADC only in internal areas of the landfill that do not drain outside of the limits of the contiguous landfill units unless the Discharger demonstrates that runoff from the particular ADC is not a threat to surface water quality and the demonstration has been approved in writing. This demonstration may take removal of sediment or suspended solids into account for landfills where surface water drains to a sedimentation basin.
4. The Discharger shall, in a timely manner, remove and relocate any wastes discharged at this facility in violation of this Order. If the Discharger is unable to remove and relocate the waste, the Discharger shall submit a report to the Central Valley Water Board explaining how the discharge occurred, why the waste cannot be removed, and any updates to the waste acceptance program necessary to prevent re-occurrence. If the waste is a hazardous waste, the Discharger shall immediately notify the Department of Toxic Substances Control.
5. The Discharger shall comply with all Standard Discharge Specifications listed in Section D of the SPRRs.

**C. FACILITY SPECIFICATIONS**

1. The Discharger shall comply with all Standard Facility Specifications listed in Section E of the SPRRs.

**D. CONSTRUCTION SPECIFICATIONS**

1. The Discharger shall not construct any expansion beyond the existing footprint until the Discharger has submitted a ROWD, received revised WDRs, and all design reports, plans, and specifications and applicable CQA plans have been approved by the Executive Officer.
2. The Discharger shall comply with all Standard Construction Specifications listed in Section F of the SPRRs.

3. The Discharger shall comply with all Storm Water Provisions listed in Section L of the SPRRs.

#### **E. CLOSURE AND POST-CLOSURE MAINTENANCE SPECIFICATIONS**

1. The Discharger shall submit a final or partial final closure and post-closure maintenance plan at least two years prior to proposed closure of any portion of the landfill in accordance with requirements in Section G of the Standard Closure and Post-Closure Specifications in the SPRRs.
2. The Discharger shall close landfill units with a final cover as proposed in the 15 December 1999 PCPCMP and as approved by this Order. The components of the approved final cover as proposed in the PCPCMP are listed in Finding 53.
3. The Discharger shall obtain revised WDRs prior to closure with any other final cover design than the design or designs approved in this Order, except when modifications are necessary for problematic areas of the final cover needing repair so long as the barrier layer (e.g., compacted clay layer) remains intact, and the modifications are approved by Central Valley Water Board staff.
4. The Discharger shall close the landfill with side slopes at steepness of 3H:1V or less, and top deck areas shall be sloped at three percent or greater.
5. The Discharger shall ensure that the vegetative/erosion resistant layer receives necessary seed, binder, and nutrients to establish the vegetation proposed in the final closure plan. The Discharger shall install necessary erosion and sedimentation controls to prevent erosion and sediment in runoff from the closed landfill during the period the vegetation is being established.
6. The Discharger shall comply with all Standard Closure and Post-Closure Specifications listed in Section G and all Standard Construction Specifications that are applicable to closure in Section F of the SPRRs.

#### **F. FINANCIAL ASSURANCE SPECIFICATIONS**

1. The Discharger shall obtain and maintain assurances of financial responsibility with CalRecycle for closure and post-closure maintenance for the Facility in at least the amounts of \$1,761,462 and \$1,302,174, respectively, adjusted for inflation annually. A report regarding financial assurances for closure and post-closure maintenance shall be submitted to the Central Valley Water Board by **1 June of each year**. This may be the same report that is submitted to CalRecycle for this purpose. If CalRecycle determines that either the amount of coverage or the mechanism is inadequate, then within 90 days of notification, the Discharger shall submit an acceptable mechanism to CalRecycle and the Central Valley Water Board for at least the amount of the approved cost estimate.
2. The Discharger shall update the PCPCMP any time there is a change that will increase the amount of the closure and/or post-closure maintenance cost estimate. The updated PCPCMP shall be submitted to the Central Valley Water Board, the LEA, and CalRecycle. The PCPCMP shall meet the requirements of Title 27, section 21769, subdivision (b), and include a lump sum estimate of the cost of carrying out all actions necessary to close each WMU, to prepare detailed design specifications, to develop the final closure and post-closure

maintenance plan, and to carry out the first 30 years of post-closure maintenance. Reports regarding financial assurance required in F.1 above shall reflect the updated cost estimate.

3. The Discharger shall obtain and maintain assurances of financial responsibility with CalRecycle for initiating and completing corrective action for all known or reasonably foreseeable releases from the Facility in at least the amount of the annual inflation-adjusted cost estimate of \$940,011. A report regarding financial assurances for corrective action shall be submitted to the Central Valley Water Board by **1 June of each year**. This may be the same report that is submitted to CalRecycle for this purpose. If CalRecycle determines that either the amount of coverage or the mechanism is inadequate, then within 90 days of notification, the Discharger shall submit an acceptable mechanism to CalRecycle and the Central Valley Water Board for at least the amount of the approved cost estimate.
4. The Discharger shall comply with all Standard Financial Assurance Specifications listed in Section H of the SPRRs.

#### **G. MONITORING SPECIFICATIONS**

1. The Discharger shall comply with the DMP provisions of Title 27 for groundwater and leachate seeps, and in accordance with MRP R5-2018-0025, and the Standard Monitoring Specifications listed in Section I of the SPRRs.
2. The Discharger shall, for any landfill unit in a corrective action monitoring program, comply with the corrective action monitoring program provisions of Title 27, MRP R5-2018-0025, and the Standard Monitoring Specifications listed in Section I of SPRRs.
3. The Discharger shall comply with the WQPS as specified in this Order, MRP R5-2018-0025, and the SPRRs.
4. The concentrations of the COCs in waters passing the Point of Compliance (defined pursuant to Title 27, section 20164 as a vertical surface located at the hydraulically downgradient limit of the landfill unit that extends through the uppermost aquifer underlying the unit) shall not exceed the concentration limits established pursuant to MRP R5-2018-0025.
5. For each monitoring event, the Discharger shall determine whether the Facility is in compliance with the WQPS using procedures specified in MRP R5-2018-0025 and the Standard Monitoring Specifications in Section I of the SPRRs.
6. As specified in MRP R5-2018-0025, the Discharger shall enter all reports and monitoring data into the online GeoTracker database as required by Division 3 of Title 27 and Chapter 30, Division 3 of Title 23.
7. The Discharger shall comply with all Standard Monitoring Specifications and Response to a Release specifications listed in Sections I and J of the SPRRs.

**H. PROVISIONS**

1. The Discharger shall maintain a copy of this Order at the Facility, including MRP R5-2018-0025 and the SPRRs, and make it available at all times to facility operating personnel, who shall be familiar with its contents, and to regulatory agency personnel.
2. The Discharger shall comply with all applicable provisions of Title 27 that are not specifically referred to in this Order.
3. The Discharger shall comply with MRP R5-2018-0025, which is incorporated into and made part of this Order by reference.
4. The Discharger shall comply with the applicable portions of the Standard Provisions and Reporting Requirements for Waste Discharge Requirements for Nonhazardous Solid Waste Discharges Regulated by Title 27.
5. If there is any conflicting or contradictory language between the WDRs, the MRP, or the SPRRs, then language in the WDRs shall supersede either the MRP or the SPRRs, and language in the MRP shall supersede the SPRRs.
6. All reports required by this Order shall be submitted pursuant to Water Code section 13267, and shall be prepared by a California-registered Civil Engineer or Certified Engineering Geologist.
7. The Discharger shall complete the tasks contained in these WDRs in accordance with the following time schedule:

<u>Task</u>	<u>Compliance Date</u>
<b>A. Water Quality Protection Standard Report</b>	
Submit an updated WQPS Report for review and approval, pursuant to Title 27, subchapter 3, article 1.	<b>1 February 2019</b>
<b>B. Financial Assurances</b>	
1. Submit an updated cost estimate for final closure and post-closure of the Facility	<b>31 December 2018</b>
2. Submit an updated cost estimate for initiating and completing corrective actions associated with known or reasonably foreseeable releases from the Facility	<b>31 December 2018</b>
3. Submit an annual review of Financial Assurance for final closure and post-closure maintenance.	<b>1 June (annually)</b>
4. Submit an annual review of Financial Assurance for initiating and completing corrective action.	<b>1 June (annually)</b>

<p><b>C. Final Closure Plans</b></p> <p>Submit a final or partial final closure and post-closure maintenance plan, design plans, and CQA plan for review and approval (see all Closure and Post-Closure Specifications in Section E, above and Section G of the SPRRs).</p>	<p><b>Two years prior to closure</b></p>
---	--

8. The Discharger shall comply with all General Provisions listed in Section K of the SPRRs.
9. The Central Valley Water Board has converted to a paperless office system. All project correspondence and reports required under this Order shall therefore be submitted electronically rather than in paper form, as follows:

All technical reports and monitoring reports required under this Order shall be converted to PDF and uploaded via internet to the State Water Board's GeoTracker database at <http://geotracker.waterboards.ca.gov>, as specified in California Code of Regulations, title 23, section 3892, subdivision (d) and section 3893. Project-associated analytical data shall be similarly uploaded to the GeoTracker database in an appropriate format specified under this Order under a site-specific global identification number. Information on the GeoTracker database is provided at:

[http://www.swrcb.ca.gov/ust/electronic\\_submittal/index.shtm](http://www.swrcb.ca.gov/ust/electronic_submittal/index.shtm)

Notification of the GeoTracker upload shall be emailed to the Central Valley Water Board at: [centralvalleyredding@waterboards.ca.gov](mailto:centralvalleyredding@waterboards.ca.gov). To ensure that the submittal is routed to the appropriate staff as quickly as possible, the following information shall be included in the body of the email:

Attention:	Title 27 Compliance & Enforcement Unit Or Title 27 Permitting Unit
Report Title	
GeoTracker Upload ID	
Discharger name:	County of Modoc
Facility name:	Alturas Class III Landfill
County:	Modoc
CIWQS place ID:	205323

I, PAMELA C. CREEDON, Executive Officer, do hereby certify that the foregoing is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, Central Valley Region, on 6 April 2018.

ORIGINAL SIGNED BY PAMELA C. CREEDON

\_\_\_\_\_  
 PAMELA C. CREEDON, Executive Officer

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

MONITORING AND REPORTING PROGRAM R5-2018-0025  
FOR  
COUNTY OF MODOC  
ALTURAS CLASS III MUNICIPAL SOLID WASTE LANDFILL  
OPERATION  
MODOC COUNTY

This monitoring and reporting program (“MRP”) is issued pursuant to California Water Code section 13267 and incorporates requirements for groundwater and leachate seep monitoring and reporting; Facility monitoring, maintenance, and reporting; and financial assurances reporting contained in California Code of Regulations, title 27, section 20005, et seq. (“Title 27”), Waste Discharge Requirements (“WDRs”) Order R5-2018-0025, and the Standard Provisions and Reporting Requirements (“SPRRs”). Compliance with this MRP is ordered by the WDRs and the Discharger shall not implement any changes to this MRP unless a revised MRP is issued by the Central Valley Water Board or the Executive Officer.

**A. MONITORING**

The Discharger shall comply with the detection monitoring program (“DMP”) provisions of Title 27 for groundwater and leachate seeps in accordance with Standard Monitoring Specifications in Section I of the SPRRs and the Monitoring Specifications in Section G of the WDRs. All monitoring shall be conducted in accordance with the most current approved *Sample Collection and Analysis Plan*, which includes quality assurance/quality control (“QA/QC”) standards.

All compliance monitoring wells established for the DMP shall constitute the monitoring points for the groundwater Water Quality Protection Standard (“WQPS”). All DMP groundwater monitoring wells and leachate seeps shall be sampled and analyzed for monitoring parameters and constituents of concern (“COCs”) as indicated and listed in Tables I through IV.

The Discharger may use alternative analytical test methods, including new USEPA approved methods, provided the methods have method detection limits (“MDLs”) equal to or lower than the analytical methods specified in this MRP, and are identified in the approved Sample Collection and Analysis Plan.

The monitoring program of this MRP includes:

<u>Section</u>	<u>Monitoring Program</u>
A.1	Groundwater Monitoring
A.2	Seep Monitoring
A.3	Facility Monitoring

**1. Groundwater Monitoring**

The Discharger shall operate and maintain a groundwater detection monitoring system that complies with the applicable provisions of Title 27, Subchapter 3 “Water Monitoring”. The detection monitoring system shall be certified by a California-licensed professional civil engineer or geologist as meeting the requirements of Title 27. The current groundwater detection monitoring system does not meet the applicable requirements of Title 27 because

the WQPS Report does not provide written statistical analysis procedures or concentration limits. Provision 7.A of WDR Order R5-2018-0025 requires submittal of a WQPS Report. The Discharger shall revise the groundwater detection monitoring system (after review and approval by Central Valley Water Board staff) as needed each time a new landfill cell or module is constructed.

The current groundwater monitoring network shall consist of the following:

<u>Well</u>	<u>Status</u>	<u>Zone</u>	<u>Units Being Monitored</u>
OB-1	Detection	Shallow	Dead Animal Unit, Unit C, Septage Ponds
OB-2	Detection	Shallow	Unit B, Woodash/Metal Unit, Septage Ponds
OB-3	Detection	Deep	Unit B
OB-4	Detection	Deep	Unit A
OB-5	Background	Shallow	(none)
OB-6	Background	Shallow	(none)
OB-7	Detection	Shallow	Unit B, Woodash/Metal Unit, Septage Ponds

Groundwater samples shall be collected from the background wells, detection monitoring wells, and any additional wells added as part of the approved groundwater monitoring system. The collected samples shall be analyzed for the parameters and constituents listed in Table I in accordance with the specified methods and frequencies. The Discharger shall collect, preserve, and transport groundwater samples in accordance with the approved Sample Collection and Analysis Plan.

**Once per quarter**, the Discharger shall measure the groundwater elevation in each well, determine groundwater flow direction, and estimate groundwater flow rates in the uppermost aquifer and in any zones of perched water and in any additional portions of the zone of saturation monitored. The results shall be reported semiannually, including the times of expected highest and lowest elevations of the water levels in the wells, pursuant to Title 27, section 20415, subdivision (e)(15).

Samples collected for the COC monitoring specified in Table I shall be collected and analyzed in accordance with the methods listed in Table IV every five years. Five-year COCs were last monitored in 2017 and shall be monitored again in **2022**. The results shall be reported in the Annual Monitoring Report for the year in which the samples were collected.

## 2. Seep Monitoring

Leachate that seeps to the surface from a landfill unit shall be sampled and analyzed for the Field and Monitoring Parameters listed in Table II upon detection. The quantity of leachate shall be estimated and reported as Leachate Flow Rate (in gallons/day). Reporting for leachate seeps shall be conducted as required in Section B.3 of this MRP, below.

### 3. Facility Monitoring

#### a. Annual Facility Inspection

Annually, prior to the anticipated rainy season, but no later than **30 September**, the Discharger shall conduct an inspection of the Facility. The inspection shall assess repair and maintenance needed for drainage control systems, cover systems, and groundwater monitoring wells; and shall assess preparedness for winter conditions (including but not limited to erosion and sedimentation control). The Discharger shall take photos of any problem areas before and after repairs. Any necessary construction, maintenance, or repairs shall be completed by **31 October**. Annual Facility inspection reporting shall be submitted as required in Section B.4 of this MRP.

#### b. Major Storm Events

The Discharger shall inspect all precipitation, diversion, and drainage facilities and all landfill side slopes for damage **within 7 days** following major storm events capable of causing damage or significant erosion. The Discharger shall take photos of any problem areas before and after repairs. Necessary repairs shall be completed **within 30 days** of the inspection. Notification and reporting requirements for major storm events shall be conducted as required in Section B.5 of this MRP.

#### c. Five-Year Iso-Settlement Survey for Closed Units

For closed landfill units, the Discharger shall conduct a five-year iso-settlement survey and produce an iso-settlement map accurately depicting the estimated total change in elevation of each portion of the final cover's low-hydraulic-conductivity layer. For each portion of the landfill, this map shall show the total lowering of the surface elevation of the final cover, relative to the baseline topographic map [Title 27, section 21090, subdivisions (e)(1 & 2)]. Reporting shall be in accordance with Section B.6 of this MRP. The initial iso-settlement survey shall be conducted at the time of final closure and every five-years after the final closure of the Facility.

#### d. Standard Observations

The Discharger shall conduct Standard Observations at the landfill in accordance with this section of the MRP. Standard observations shall be conducted in accordance with the following schedule:

<u>Landfill Unit Type</u>	<u>Frequency</u>	<u>Season</u>
Active	Monthly <sup>1</sup>	Wet: 1 October to 30 April
Active	Quarterly <sup>1</sup>	Dry: 1 May to 30 September
Inactive/Closed	Monthly <sup>1</sup>	Wet: 1 October to 30 April
Inactive/Closed	Quarterly <sup>1</sup>	Dry: 1 May to 30 September

<sup>1</sup> Or after a major storm event

The Standard Observations shall include:

1) For the landfill units:

- a) Evidence of ponded water at any point on the landfill outside of any contact storm water/leachate diversions structures on the active face (show affected area on map); and
  - b) Evidence of erosion and/or of day-lighted refuse.
- 2) Along the perimeter of the landfill units:
- a) Evidence of leachate seeps, estimated size of affected area, and flow rate (show affected area on map); and
  - b) Evidence of erosion and/or of day-lighted refuse.

Results of Standard Observations shall be submitted in the semiannual monitoring reports required in Section B.1 of this MRP.

## B. REPORTING

The Discharger shall submit the following reports in accordance with the required schedule:

### Reporting Schedule

<u>Section</u>	<u>Report</u>	<u>End of Reporting Period</u>	<u>Due Date</u>
B.1	Semiannual Monitoring Report	30 June, 31 December	<b>1 August, 1 February</b>
B.2	Annual Monitoring Report	31 December	<b>1 February</b>
B.3	Seep Reporting	Continuous	<b>Immediately &amp; 7 Days</b>
B.4	Annual Facility Inspection Report	31 October	<b>15 November</b>
B.5	Major Storm Event Reporting	Continuous	<b>7 days from damage discovery</b>
B.6	Survey and Iso-Settlement Map for Closed Landfills	Every Five Years	<b>At Closure Completion and Every Five Years</b>
B.7	Financial Assurances Report	31 December	<b>1 June</b>

The Discharger shall enter all monitoring data and reports into the online GeoTracker database as required by Division 3 of Title 27 and Chapter 30, Division 3 of Title 23. Notification of the Geotracker upload shall be emailed to the Central Valley Water Board at: [centralvalleyredding@waterboards.ca.gov](mailto:centralvalleyredding@waterboards.ca.gov). To ensure that the submittal is routed to the appropriate staff as quickly as possible, the following information shall be included in the body of the email:

Attention:	Title 27 Compliance & Enforcement Unit Or Title 27 Permitting Unit
Report Title	
GeoTracker Upload ID	
Discharger name:	County of Modoc Public Works
Facility name:	Alturas Class III Landfill
County:	Modoc
CIWQS place ID:	205323

### Reporting Requirements

The Discharger shall submit monitoring reports **semiannually** with the data and information as required in this MRP and as required in WDRs Order R5-2018-0025 and the SPRRs (particularly Section I: "Standard Monitoring Specifications" and Section J: "Response to a Release"). In reporting the monitoring data required by this program, the Discharger shall arrange the data in tabular form so that the date, the constituents, the concentrations, and the units are readily discernible. The data shall be summarized in such a manner so as to illustrate clearly the compliance with WDRs or the lack thereof. Data shall also be submitted in a digital format, such as a computer disk.

Field and laboratory tests shall be reported in each monitoring report. Semiannual and annual monitoring reports shall be submitted to the Central Valley Water Board in accordance with the above schedule for the calendar period in which samples were taken or observations made.

The results of **all monitoring** conducted at the Facility shall be reported to the Central Valley Water Board in accordance with the reporting schedule above for the calendar period in which samples were taken or observations made.

The Discharger shall retain records of all monitoring information, including all calibration and maintenance records, all original strip chart recordings of continuous monitoring instrumentation, copies of all reports required by this Order, and records of all data used to complete the application for this Order. Records shall be maintained throughout the life of the Facility including the post-closure period. Such records shall be legible and shall show the following for each sample:

- a) Sample identification and the monitoring point or background monitoring point from which it was taken, along with the identity of the individual who obtained the sample;
- b) Date, time, and manner of sampling;
- c) Date and time that analyses were started and completed, and the name of the personnel and laboratory performing each analysis;
- d) Complete procedure used, including method of preserving the sample, and the identity and volumes of reagents used;
- e) Calculation of results; and
- f) Results of analyses, and the MDL and practical quantitation limit ("PQL") for each analysis. All peaks shall be reported.

### Required Reports

1. **Semiannual Monitoring Report:** Monitoring reports shall be submitted semiannually and are due on **1 August** and **1 February**. Each semiannual monitoring report shall contain at least the following:
  - a) For each groundwater monitoring point addressed by the report, a description of:
    - 1) The time of water level measurement;
    - 2) The type of pump - or other device - used for purging and the elevation of the pump intake relative to the elevation of the screened interval;
    - 3) The method of purging used to stabilize water in the well bore before the sample is taken including the pumping rate; the equipment and methods used to monitor field pH, temperature, and conductivity during purging; results of pH, temperature, conductivity, and turbidity testing; and the method of disposing of the purge water;
    - 4) The type of pump - or other device - used for sampling, if different than the pump or device used for purging; and
    - 5) A statement that the sampling procedure was conducted in accordance with the approved Sample Collection and Analysis Plan.
  - b) A map or aerial photograph showing the locations of observation stations, monitoring points, and background monitoring points.
  - c) The estimated quarterly groundwater flow rate and direction in the uppermost aquifer, in any zones of perched water, and in any additional zone of saturation monitored based upon water level elevations taken prior to the collection of the water quality data submitted in the report [Title 27, section 20415, subdivision (e)(15)].
  - d) Cumulative tabulated monitoring data for all monitoring points and constituents for groundwater and leachate seeps. Concentrations below the laboratory reporting limit shall not be reported as "ND" unless the reporting limit is also given in the table. Otherwise they shall be reported "<" the reporting limit (e.g., <0.10). Units shall be as required in Tables I and II unless specific justification is given to report in other units. Refer to the SPRRs Section I "Standard Monitoring Specifications" for requirements regarding MDLs and PQLs.
  - e) Laboratory statements of results of all analyses evaluating compliance with requirements.
  - f) An evaluation of the concentration of each monitoring parameter (or 5-year COC when five year COC sampling is conducted) as compared to the current concentration limits, and the results of any required verification testing for constituents exceeding a concentration limit. Report any actions taken under Section J: Response to a Release for verified exceedances of a concentration limit for wells/constituents not already in corrective action monitoring.
  - g) An evaluation of the effectiveness of the leachate monitoring and control facilities, and of the run-off/run-on control facilities. Include a summary of any instances where leachate depth on an MSW landfill liner system exceeded 30 cm (excluding the leachate sump), and information about the required notification and corrective action in Standard Facility Specification E.13 of the SPRRs.

- h) A summary of all Standard Observations for the reporting period required in Section A.3.d of this MRP.
  - i) A summary of inspection, leak search, and repair of final covers on any closed landfill units in accordance with an approved final post-closure maintenance plan as required by Standard Closure and Post-Closure Maintenance Specifications G.26 through G.29 of the SPRRs.
2. **Annual Monitoring Report:** The Discharger shall submit an Annual Monitoring Report to the Central Valley Water Board by **1 February** covering the reporting period of the previous monitoring year. If desired, the Annual Monitoring Report may be combined with the second semiannual report, but if so, shall clearly state that it is both a semi-annual and annual monitoring report in its title. Each Annual Monitoring Report shall contain the following information:
- a) All monitoring parameters shall be graphed to show historical trends at each monitoring point and background monitoring point, for all samples taken within at least the previous five calendar years. If a 5-year COC event was performed, then these parameters shall also be graphically presented. Each such graph shall plot the concentration of one or more constituents for the period of record for a given monitoring point or background monitoring point, at a scale appropriate to show trends or variations in water quality. The graphs shall plot each datum, rather than plotting mean values. Graphical analysis of monitoring data may be used to provide significant evidence of a release.
  - b) An evaluation of the monitoring parameters with regards to the cation/anion balance, and a graphical presentation using a Stiff diagram, a Piper graph, or a Schoeller plot.
  - c) All historical monitoring data for which there are detectable results, including data for the previous year, shall be submitted in tabular form in a digital file format such as a computer disk. The Central Valley Water Board regards the submittal of data in hard copy and in digital format as "...the form necessary for..." statistical analysis [Title 27, section 20420, subdivision (h)], that facilitates periodic review by the Central Valley Water Board.
  - d) Hydrographs of each well showing the elevation of groundwater with respect to the elevations of the top and bottom of the screened interval and the elevation of the pump intake. Hydrographs of each well shall be prepared quarterly and submitted annually.
  - e) A comprehensive discussion of the compliance record, and the result of any corrective actions taken or planned which may be needed to bring the Discharger into full compliance with the WDRs.
  - f) A map showing the area and elevations in which filling has been completed during the previous calendar year and a comparison to final closure design contours, and include a projection of the year in which each discrete landfill module will be filled.
  - g) A written summary of the monitoring results, indicating any changes made or observed since the previous Annual Monitoring Report.
  - h) Updated concentration limits for each monitoring parameter at each monitoring well based on the new data set.

3. **Seep Reporting:** The Discharger shall report by telephone any seepage from the disposal area **immediately** after it is discovered. A written report shall be filed with the Central Valley Water Board **within seven days**, containing at least the following information:
  - a) A map showing the location(s) of seepage;
  - b) An estimate of the flow rate;
  - c) A description of the nature of the discharge (e.g., all pertinent observations and analyses);
  - d) Verification that samples have been submitted for analyses of the Field Parameters and Monitoring Parameters listed in Table III of this MRP, and an estimated date that the results will be submitted to the Central Valley Water Board; and
  - e) Corrective measures underway or proposed, and corresponding time schedule.
4. **Annual Facility Inspection Reporting:** By **15 November** of each year, the Discharger shall submit a report describing the results of the inspection and the repair measures implemented, preparations for winter, and include photographs of any problem areas and the repairs. Refer to Section A.3.a of this MRP, above.
5. **Major Storm Event Reporting:** Following major storm events capable of causing damage or significant erosion, the Discharger **immediately** shall notify Central Valley Water Board staff of any damage or significant erosion upon discovery and report subsequent repairs within **14 days** of completion of the repairs, including photographs of the problem and the repairs. Refer to Section A.3.b of this MRP, above.
6. **Survey and Iso-Settlement Map for Closed Landfills:** The Discharger shall conduct a survey and submit an iso-settlement map for each closed area of the landfill every five years pursuant to Title 27, section 21090, subdivision (e). Refer to Section A.3.c of this MRP, above. The next report is due upon completion of final closure of the Facility.
7. **Financial Assurances Report:** By **1 June** of each year, the Discharger shall submit a copy of the annual financial assurances report due to CalRecycle that updates the financial assurances for closure, post-closure maintenance, and corrective action. Refer to Financial Assurances Specifications F.1 through F.3 of the WDRs.

## C. WATER QUALITY PROTECTION STANDARD AND COMPLIANCE PERIOD

### 1. Water Quality Protection Standard Report

For each waste management unit ("WMU"), the WQPS shall consist of all COCs, the concentration limit for each COC, the verification retesting procedure to confirm measurably significant evidence of a release, the point of compliance ("POC"), and all water quality monitoring points for each monitored medium.

The WQPS for naturally occurring waste constituents consists of the COCs, the concentration limits, and the POC and all monitoring points. Any proposed changes to the WQPS other than annual update of the concentration limits shall be submitted in a report for review and approval.

The WQPS Report shall:

- a. Identify **all distinct bodies of surface and ground water** that could be affected in the event of a release from a WMU or portion of a unit. This list shall include at least the uppermost aquifer and any permanent or ephemeral zones of perched groundwater underlying the Facility.
- b. Include a map showing the monitoring points and background monitoring points for the groundwater monitoring program. The map shall include the POC in accordance with Title 27, section 20405.
- c. Evaluate the perennial direction(s) of groundwater movement within the uppermost groundwater zone(s).
- d. Include a proposed statistical method for calculating concentration limits for monitoring parameters and COCs that are detected in 10% or greater of the background data (naturally-occurring constituents) using a statistical procedure from Title 27, section 20415, subdivisions (e)(8)(A-D)] or section 20415, subdivision (e)(8)(E).
- e. Include a retesting procedure to confirm or deny measurably significant evidence of a release pursuant to Title 27, section 20415, subdivision (e)(8)(E) and section 20420, subdivisions (j)(1-3).

The WQPS shall be certified by a California-registered civil engineer or geologist as meeting the requirements of Title 27. If subsequent sampling of the background monitoring point(s) indicates significant water quality changes due to either seasonal fluctuations or other reasons unrelated to waste management activities at the site, the Discharger may request modification of the WQPS.

The Discharger's WQPS Report does not include a description of the statistical data analysis methods to calculate concentration limits for each monitored constituent in accordance with Title 27. Provision 7 of the WDRs requires submittal of a WQPS Report

The WQPS concentration limits shall be updated annually for each monitoring well using new and historical monitoring data.

## **2. Monitoring Parameters**

Monitoring parameters are a select group of constituents that are monitored during each monitoring event that are the waste constituents, reaction products, hazardous constituents, and physical parameters that provide a reliable indication of a release from a waste management unit. The monitoring parameters for all WMUs are those listed in Tables I and II for the specified monitored medium.

### **3. Constituents of Concern (COCs)**

The COCs include a larger group of waste constituents, their reaction products, and hazardous constituents that are reasonably expected to be in or derived from waste contained in the WMU, and are required to be monitored every five years [Title 27, sections 20395 and 20420, subdivision (g)]. The COCs for all WMUs at the Facility are those listed in Tables I and II for the specified monitored medium, and Table IV. The Discharger shall monitor all COCs every five years, or more frequently as required in accordance with a Corrective Action Program. The last 5-year COC report was submitted to the Central Valley Water Board in the 2017 *Annual Monitoring Report*, and 5-year COCs are due to be monitored again in **2022**.

### **4. Concentration Limits**

For a naturally occurring COC, the concentration limit for each COC shall be determined as follows:

- a. By calculation in accordance with a statistical method pursuant to Title 27, section 20415, subdivisions (e)(8)(A-D); or
- b. By an alternate statistical method meeting the requirements of Title 27, section 20415, subdivision (e)(8)(E).

The Discharger has not provided procedures for calculating concentration limits or numeric concentration limits as part of the WQPS Report. Provision 7 of the WDRs requires submittal of an updated WQPS Report that includes this content.

### **5. Retesting Procedures for Confirming Evidence of a Release**

If monitoring results indicate measurably significant evidence of a release, as described in Standard Monitoring Specification I.45 of the SPRRs, then:

- a. For analytes that are detected in less than 10% of the background samples (such as non-naturally occurring constituents), the Discharger shall use the non-statistical retesting procedure required in Standard Monitoring Specification I.46 of the SPRRs.
- b. For analytes that are detected in 10% or greater of the background samples (naturally occurring constituents), the Discharger shall use one of the statistical retesting procedure as required in Standard Monitoring Specification I.47 of the SPRRs.

### **6. Point of Compliance**

The POC for each WMU is a vertical surface located at the hydraulically downgradient limit of the WMU that extends through the uppermost aquifer underlying the WMU. The following are monitoring locations at the POC:

<u>Cell or Module</u>	<u>POC Monitoring Wells</u>
Unit A	OB-4
Unit B	OB-2, OB-3, OB-7
Unit C	OB-1
Dead Animal Unit	OB-1
Woodash/Metal Unit	OB-2, OB-7
Septage Ponds	OB-2, OB-7

## 7. Compliance Period

The compliance period for each WMU shall be the number of years equal to the active life of the unit plus the closure period. The compliance period is the minimum period during which the Discharger shall conduct a water quality monitoring program subsequent to a release from the WMU. The compliance period shall begin anew each time the Discharger initiates an evaluation monitoring program [Title 27, section 20410].

## 8. Monitoring Points

A monitoring point is a well, device, or location specified in the WDRs, which monitoring is conducted and at which the WQPS applies. The monitoring points for each monitored medium are listed in Section A of this MRP.

## D. TRANSMITTAL LETTER FOR ALL REPORTS

A transmittal letter explaining the essential points shall accompany each report. At a minimum, the transmittal letter shall identify any violations found since the last report was submitted, and if the violations were corrected. If no violations have occurred since the last submittal, this shall be stated in the transmittal letter. The transmittal letter shall also state that a discussion of any violations found since the last report was submitted, and a description of the actions taken or planned for correcting those violations, including any references to previously submitted time schedules, is contained in the accompanying report. The transmittal letter shall contain a statement by the discharger, or the discharger's authorized agent, under penalty of perjury, that to the best of the signer's knowledge the report is true, accurate, and complete.

The Discharger shall implement the above monitoring program on the effective date of this Program.

ORIGINAL SIGNED BY PAMELA C. CREEDON

Ordered by: \_\_\_\_\_  
PAMELA C. CREEDON, Executive Officer

\_\_\_\_\_  
6 April 2018

(Date)

**TABLE I**  
**GROUNDWATER DETECTION MONITORING PROGRAM**

<u>Parameter</u>	<u>Geotracker Code</u>	<u>Units</u>	<u>Sampling Frequency</u>	<u>Reporting Frequency</u>
<b>Field Parameters</b>				
Groundwater Elevation	GWELEV	Ft. & 100ths, M.S.L.	Quarterly	Semiannual
Temperature	TEMP	°C	see Note 1	Semiannual
Electrical Conductivity	SC	umhos/cm	see Note 1	Semiannual
pH	PH	pH units	see Note 1	Semiannual
Turbidity	TURB	Turbidity units	see Note 1	Semiannual
<b>Monitoring Parameters</b>				
Total Dissolved Solids (TDS)	TDS	mg/L <sup>2</sup>	see Note 1	Semiannual
Chloride	CL	mg/L	see Note 1	Semiannual
Carbonate	CACO3	mg/L	see Note 1	Semiannual
Bicarbonate	BICACO3	mg/L	see Note 1	Semiannual
Nitrate - Nitrogen	NO3N	mg/L	see Note 1	Semiannual
Sulfate	SO4	mg/L	see Note 1	Semiannual
Calcium	CA	mg/L	see Note 1	Semiannual
Magnesium	MG	mg/L	see Note 1	Semiannual
Potassium	K	mg/L	see Note 1	Semiannual
Sodium	NA	mg/L	see Note 1	Semiannual
Volatile Organic Compounds (USEPA Method 8260B, short list, see Table III)		ug/L <sup>3</sup>	see Note 1	Semiannual
<b>5-Year Constituents of Concern (see Table IV)</b>				
Total Organic Carbon	TOC	mg/L	5 years	2022 and every
Inorganics (dissolved)		ug/L	5 years	5 years thereafter
Volatile Organic Compounds (USEPA Method 8260B, extended list)		ug/L	5 years	" "
Semi-Volatile Organic Compounds (USEPA Method 8270C or D)		ug/L	5 years	" "
Chlorophenoxy Herbicides (USEPA Method 8151A)		ug/L	5 years	" "
Organophosphorus Compounds (USEPA Method 8141B)		ug/L	5 years	" "

<sup>1</sup> Semiannual in shallow zone wells (currently, OB-1, -2, -5, -6, -7). Annual in deep zone wells (currently, OB-3 and OB-4).

<sup>2</sup> Milligrams per liter

<sup>3</sup> Micrograms per liter

**TABLE II**  
**SEEP MONITORING <sup>1</sup>**

<u>Parameter</u>	<u>Geotracker Code</u>	<u>Units</u>	<u>Sampling Frequency</u>	<u>Reporting Frequency</u>
<b>Field Parameters</b>				
Total Flow		Gallons	Immediately	Immediately
Flow Rate	FLOW	Gallons/Day	Immediately	Immediately
Electrical Conductivity	SC	umhos/cm	Immediately	Immediately
pH	PH	pH units	Immediately	Immediately
<b>Monitoring Parameters</b>				
Total Dissolved Solids (TDS)	TDS	mg/L <sup>2</sup>	Immediately	Immediately
Chloride	CL	mg/L	Immediately	Immediately
Carbonate	CACO3	mg/L	Immediately	Immediately
Bicarbonate	BICACO3	mg/L	Immediately	Immediately
Nitrate - Nitrogen	NO3N	mg/L	Immediately	Immediately
Sulfate	SO4	mg/L	Immediately	Immediately
Calcium	CA	mg/L	Immediately	Immediately
Magnesium	MG	mg/L	Immediately	Immediately
Potassium	K	mg/L	Immediately	Immediately
Sodium	NA	mg/L	Immediately	Immediately
Volatile Organic Compounds (USEPA Method 8260B, short list, see Table III)		ug/L <sup>3</sup>	Immediately	Immediately

<sup>1</sup>. Leachate seeps shall be sampled and analyzed for the Field and Monitoring Parameters in this table upon detection. The quantity of leachate shall be estimated and reported in gallons/day. Also, refer to Section B.3

<sup>2</sup> Milligrams per liter

<sup>3</sup> Micrograms per liter

**TABLE III**

**MONITORING PARAMETERS FOR DETECTION MONITORING**

**Surrogates for Metallic Constituents:**

<u>COC Description</u>	<u>Geotracker Code</u>
pH	PH
Total Dissolved Solids	TDS
Electrical Conductivity	SC
Chloride	CL
Sulfate	SO4
Nitrate nitrogen	NO3N

**Volatile Organic Compounds, short list (USEPA Method 8260B):**

Acetone	ACE
Acrylonitrile	ACRAMD
Benzene	BZ
Bromochloromethane	BRCLME
Bromodichloromethane	BDCME
Bromoform (Tribromomethane)	TBME
Carbon disulfide	CDS
Carbon tetrachloride	CTCL
Chlorobenzene	CLBZ
Chloroethane (Ethyl chloride)	CLEA
Chloroform (Trichloromethane)	TCLME
Dibromochloromethane (Chlorodibromomethane)	DBCME
1,2-Dibromo-3-chloropropane (DBCP)	DBCP
1,2-Dibromoethane (Ethylene dibromide; EDB)	EDB
o-Dichlorobenzene (1,2-Dichlorobenzene)	DCBZ12
m-Dichlorobenzene (1,3-Dichlorobenzene)	DCBZ13
p-Dichlorobenzene (1,4-Dichlorobenzene)	DCBZ14
trans- 1,4-Dichloro-2-butene	DCBE14T
Dichlorodifluoromethane (CFC-12)	FC12
1,1-Dichloroethane (Ethylidene chloride)	DCA11
1,2-Dichloroethane (Ethylene dichloride)	DCA12
1,1 -Dichloroethylene (1,1 -Dichloroethene; Vinylidene chloride)	DCE11
cis- 1,2-Dichloroethylene (cis- 1,2-Dichloroethene)	DCE12C
trans-1,2-Dichloroethylene (trans-1,2-Dichloroethene)	DCE12T
1,2-Dichloropropane (Propylene dichloride)	DCPA12
cis- 1,3-Dichloropropene	DCP13C
trans- 1,3-Dichloropropene	DCP13T
Di-isopropylether (DIPE)	DIPE
Ethanol	ETHANOL
Ethyltertiary butyl ether	ETBE
Ethylbenzene	EBZ
2-Hexanone (Methyl butyl ketone)	HXO2
Hexachlorobutadiene	HCBU
Methyl bromide (Bromomethane)	BRME
Methyl chloride (Chloromethane)	CLME

**TABLE III**  
**MONITORING PARAMETERS FOR DETECTION MONITORING**

**Continued**

Methylene bromide (Dibromomethane)	DBMA
Methylene chloride (Dichloromethane)	DCMA
Methyl ethyl ketone (MEK: 2-Butanone)	MEK
Methyl iodide (Iodomethane)	IME
Methyl t-butyl ether	MTBE
4-Methyl-2-pentanone (Methyl isobutylketone)	MIBK
Naphthalene	NAPH
Styrene	STY
Tertiary amyl methyl ether	TAME
Tertiary butyl alcohol	TBA
1,1,1,2-Tetrachloroethane	TC1112
1,1,2,2-Tetrachloroethane	PCA
Tetrachloroethylene (Tetrachloroethene; Perchloroethylene)	PCE
Toluene	BZME
1,2,4-Trichlorobenzene	TCB124
1,1,1-Trichloroethane (Methylchloroform)	TCA111
1,1,2-Trichloroethane	TCA112
Trichloroethylene (Trichloroethene)	TCE
Trichlorofluoromethane (CFC- 11)	FC11
1,2,3-Trichloropropane	TCPR123
Vinyl acetate	VA
Vinyl chloride	VC
Xylenes	XYLENES

**TABLE IV**  
**5-YEAR COCs & APPROVED USEPA ANALYTICAL METHODS**

<u>Inorganics (dissolved):</u>	<u>USEPA Method</u>	<u>Geotracker Code</u>
Aluminum	6010	AL
Antimony	7041	SB
Barium	6010	BA
Beryllium	6010	BE
Cadmium	7131A	CD
Chromium	6010	CR
Cobalt	6010	CO
Copper	6010	CU
Silver	6010	AG
Tin	6010	SN
Vanadium	6010	V
Zinc	6010	ZN
Iron	6010	FE
Manganese	6010	MN
Arsenic	7062	AS
Lead	7421	PB
Mercury	7470A	HG
Nickel	7521	NI
Selenium	7742	SE
Thallium	7841	TL
Cyanide	9010C	CN
Sulfide	9030B	S

**Volatile Organic Compounds, extended list (USEPA Method 8260B):**

<u>COC Description</u>	<u>Geotracker Code</u>
Acetone	ACE
Acetonitrile (Methyl cyanide)	ACCN
Acrolein	ACRL
Acrylonitrile	ACRAMD
Allyl chloride (3-Chloropropene)	CLPE3
Benzene	BZ
Bromochloromethane (Chlorobromomethane)	BRCLME
Bromodichloromethane (Dibromochloromethane)	DBCME
Bromoform (Tribromomethane)	TBME
Carbon disulfide	CDS
Carbon tetrachloride	CTCL
Chlorobenzene	CLBZ
Chloroethane (Ethyl chloride)	CLEA
Chloroform (Trichloromethane)	TCLME
Chloroprene	CHLOROPRENE
Dibromochloromethane (Chlorodibromomethane)	DBCME
1,2-Dibromo-3-chloropropane (DBCP)	DBCP
1,2-Dibromoethane (Ethylene dibromide; EDB)	EDB
o-Dichlorobenzene (1,2-Dichlorobenzene)	DCBZ12

**TABLE IV**  
**5-YEAR COCs & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

m-Dichlorobenzene (1,3-Dichlorobenzene)	DCBZ13
p-Dichlorobenzene (1,4-Dichlorobenzene)	DCBZ14
trans- 1,4-Dichloro-2-butene	DCBE14T
Dichlorodifluoromethane (CFC 12)	FC12
1,1 -Dichloroethane (Ethylidene chloride)	DCA11
1,2-Dichloroethane (Ethylene dichloride)	DCA12
1,1 -Dichloroethylene (1, 1-Dichloroethene; Vinylidene chloride)	DCE11
cis- 1,2-Dichloroethylene (cis- 1,2-Dichloroethene)	DCE12C
trans- 1,2-Dichloroethylene (trans- 1,2-Dichloroethene)	DCE12T
1,2-Dichloropropane (Propylene dichloride)	DCPA12
1,3-Dichloropropane (Trimethylene dichloride)	DCPA13
2,2-Dichloropropane (Isopropylidene chloride)	DCPA22
1,1 -Dichloropropene	DCP11
cis- 1,3-Dichloropropene	DCP13C
trans- 1,3-Dichloropropene	DCP13T
Di-isopropylether (DIPE)	DIPE
Ethanol	ETHANOL
Ethyltertiary butyl ether	ETBE
Ethylbenzene	EBZ
Ethyl methacrylate	EMETHACRY
Hexachlorobutadiene	HCBU
2-Hexanone (Methyl butyl ketone)	HXO2
Isobutyl alcohol	ISOBTOH
Methacrylonitrile	METHACRN
Methyl bromide (Bromomethane)	BRME
Methyl chloride (Chloromethane)	CLME
Methyl ethyl ketone (MEK; 2-Butanone)	MEK
Methyl iodide (Iodomethane)	IME
Methyl t-butyl ether	MTBE
Methyl methacrylate	MMTHACRY
4-Methyl-2-pentanone (Methyl isobutyl ketone)	MIBK
Methylene bromide (Dibromomethane)	DBMA
Methylene chloride (Dichloromethane)	DCMA
Naphthalene	NAPH
Propionitrile (Ethyl cyanide)	PACN
Styrene	STY
Tertiary amyl methyl ether	TAME
Tertiary butyl alcohol	TBA
1,1,1,2-Tetrachloroethane	TC1112
1,1,2,2-Tetrachloroethane	PCA
Tetrachloroethylene (Tetrachloroethene; Perchloroethylene; PCE)	PCE
Toluene	BZME
1,2,4-Trichlorobenzene	TCB124
1,1,1 -Trichloroethane (Methylchloroform)	TCA111

**TABLE IV**

**5-YEAR COCs & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

1,1,2-Trichloroethane	TCA112
Trichloroethylene (Trichloroethene; TCE)	TCE
Trichlorofluoromethane (CFC- 11)	FC11
1,2,3-Trichloropropane	TCPR123
Vinyl acetate	VA
Vinyl chloride (Chloroethene)	VC
Xylene (total)	XYLENES

**Semi-Volatile Organic Compounds (USEPA Method 8270C or D - base, neutral, & acid extractables):**

Acenaphthene	ACNP
Acenaphthylene	ACNPY
Acetophenone	ACPHN
2-Acetylaminofluorene (2-AAF)	ACAMFL2
Aldrin	ALDRIN
4-Aminobiphenyl	AMINOBP4
Anthracene	ANTH
Benzo[a]anthracene (Benzanthracene)	BZAA
Benzo[b]fluoranthene	BZBF
Benzo[k]fluoranthene	BZKF
Benzo[g,h,i]perylene	BZGHIP
Benzo[a]pyrene	BZAP
Benzyl alcohol	BZLAL
Bis(2-ethylhexyl) phthalate	BIS2EHP
alpha-BHC	BHCALPHA
beta-BHC	BHCBETA
delta-BHC	BHCDELTA
gamma-BHC (Lindane)	BHCGAMMA
Bis(2-chloroethoxy)methane	BECEM
Bis(2-chloroethyl) ether (Dichloroethyl ether)	BIS2CEE
Bis(2-chloro-1-methylethyl) ether (Bis(2-chloroisopropyl) ether; DCIP)	BIS2CIE
4-Bromophenyl phenyl ether	BPPE4
Butyl benzyl phthalate (Benzyl butyl phthalate)	BBP
Chlordane	CHLORDANE
p-Chloroaniline	CLANIL4
Chlorobenzilate	CLBZLATE
p-Chloro-m-cresol (4-Chloro-3-methylphenol)	C4M3PH
2-Chloronaphthalene	CNPH2
2-Chlorophenol	CLPH2
4-Chlorophenyl phenyl ether	CPPE4
Chrysene	CHRYSENE
o-Cresol (2-methylphenol)	MEPH2
m-Cresol (3-methylphenol)	MEPH3
p-Cresol (4-methylphenol)	MEPH4
4,4'-DDD	DDD44

**TABLE IV**  
**5-YEAR COCs & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

4,4'-DDE	DDE44
4,4'-DDT	DDT44
Diallate	DIALLATE
Dibenz[a,h]anthracene	DBAHA
Dibenzofuran	DBF
Di-n-butyl phthalate	DNBP
3,3'-Dichlorobenzidine	DBZD33
2,4-Dichlorophenol	DCP24
2,6-Dichlorophenol	DCP26
Dieldrin	DIELDRIN
Diethyl phthalate	DEPH
p-(Dimethylamino)azobenzene	PDMAABZ
7,12-Dimethylbenz[a]anthracene	DMBZA712
3,3'-Dimethylbenzidine	DMBZD33
2,4-Dimethylphenol (m-Xylenol)	DMP24
Dimethyl phthalate	DMPH
m-Dinitrobenzene	DNB13
4,6-Dinitro-o-cresol (4,6-Dinitro-2-methylphenol)	DN46M
2,4-Dinitrophenol	DNP24
2,4-Dinitrotoluene	DNT24
2,6-Dinitrotoluene	DNT26
Di-n-octyl phthalate	DNOP
Diphenylamine	DPA
Endosulfan I	ENDOSULFANA
Endosulfan II	ENDOSULFANB
Endosulfan sulfate	ENDOSULFANS
Endrin	ENDRIN
Endrin aldehyde	ENDRINALD
Ethyl methanesulfonate	EMSULFN
Famphur	FAMPHUR
Fluoranthene	FLA
Fluorene	FL
Heptachlor	HEPTACHLOR
Heptachlor epoxide	HEPT-EPOX
Hexachlorobenzene	HCLBZ
Hexachlorocyclopentadiene	HCCP
Hexachloroethane	HCLEA
Hexachloropropene	HCPR
Indeno(1,2,3-c,d)pyrene	INP123
Isodrin	ISODRIN
Isophorone	ISOP
Isosafrole	ISOSAFR
Kepone	KEP
Methapyrilene	MTPYRLN
Methoxychlor	MTXYCL
3-Methylcholanthrene	MECHLAN3
Methyl methanesulfonate	MMSULFN

**TABLE IV**

**5-YEAR COCs & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

2-Methylnaphthalene	MTNPH2
1,4-Naphthoquinone	NAPHQ14
1-Naphthylamine	AMINONAPH1
2-Naphthylamine	AMINONAPH2
o-Nitroaniline (2-Nitroaniline)	NO2ANIL2
m-Nitroaniline (3-Nitroaniline)	NO2ANIL3
p-Nitroaniline (4-Nitroaniline)	NO2ANIL4
Nitrobenzene	NO2BZ
o-Nitrophenol (2-Nitrophenol)	NTPH2
p-Nitrophenol (4-Nitrophenol)	NTPH4
N-Nitrosodi-n-butylamine (Di-n-butylNitrosamine)	NNSBU
N-Nitrosodiethylamine (DiethylNitrosamine)	NNSE
N-Nitrosodimethylamine (DimethylNitrosamine)	NNSM
N-Nitrosodiphenylamine (DiphenylNitrosamine)	NNSPH
N-Nitrosodipropylamine (N-Nitroso-N-dipropylamine; Di-n-propylNitrosamine)	NNSPR
N-Nitrosomethylethylamine (MethylethylNitrosamine)	NNSME
N-Nitrosopiperidine	NNSPPRD
N-Nitrosopyrrolidine	NNSPYRL
5-Nitro-o-toluidine	TLDNONT5
Pentachlorobenzene	PECLBZ
Pentachloronitrobenzene (PCNB)	PECLNO2BZ
Pentachlorophenol	PCP
Phenacetin	PHNACTN
Phenanthrene	PHAN
Phenol	PHENOL
p-Phenylenediamine	ANLNAM4
Polychlorinated biphenyls (PCBs; Aroclors)	PCBS
Pronamide	PRONAMD
Pyrene	PYR
Safrole	SAFROLE
1,2,4,5-Tetrachlorobenzene	C4BZ1245
2,3,4,6-Tetrachlorophenol	TCP2346
o-Toluidine	TLDNO
Toxaphene	TOXAP
2,4,5-Trichlorophenol	TCP245
0,0,0-Triethyl phosphorothioate	TEPTH
sym-Trinitrobenzene	TNB135

**TABLE IV**  
**5-YEAR COCs & APPROVED USEPA ANALYTICAL METHODS**


**Continued**


**Chlorophenoxy Herbicides (USEPA Method 8151A):**

2,4-D (2,4-Dichlorophenoxyacetic acid)	24D
Dinoseb (DNBP; 2-sec-Butyl-4,6-dinitrophenol)	DINOSEB
Silvex (2,4,5-Trichlorophenoxypropionic acid; 2,4,5-TP)	SILVEX
2,4,5-T (2,4,5-Trichlorophenoxyacetic acid)	245T

**Organophosphorus Compounds (USEPA Method 8141B):**

Atrazine	ATRAZINE
Chlorpyrifos	CLPYRIFOS
0,0-Diethyl 0-2-pyrazinyl phosphorothioate (Thionazin)	ZINOPHOS
Diazinon	DIAZ
Dimethoate	DIMETHAT
Disulfoton	DISUL
Methyl parathion (Parathion methyl)	PARAM
Parathion	PARAE
Phorate	PHORATE
Simazine	SIMAZINE

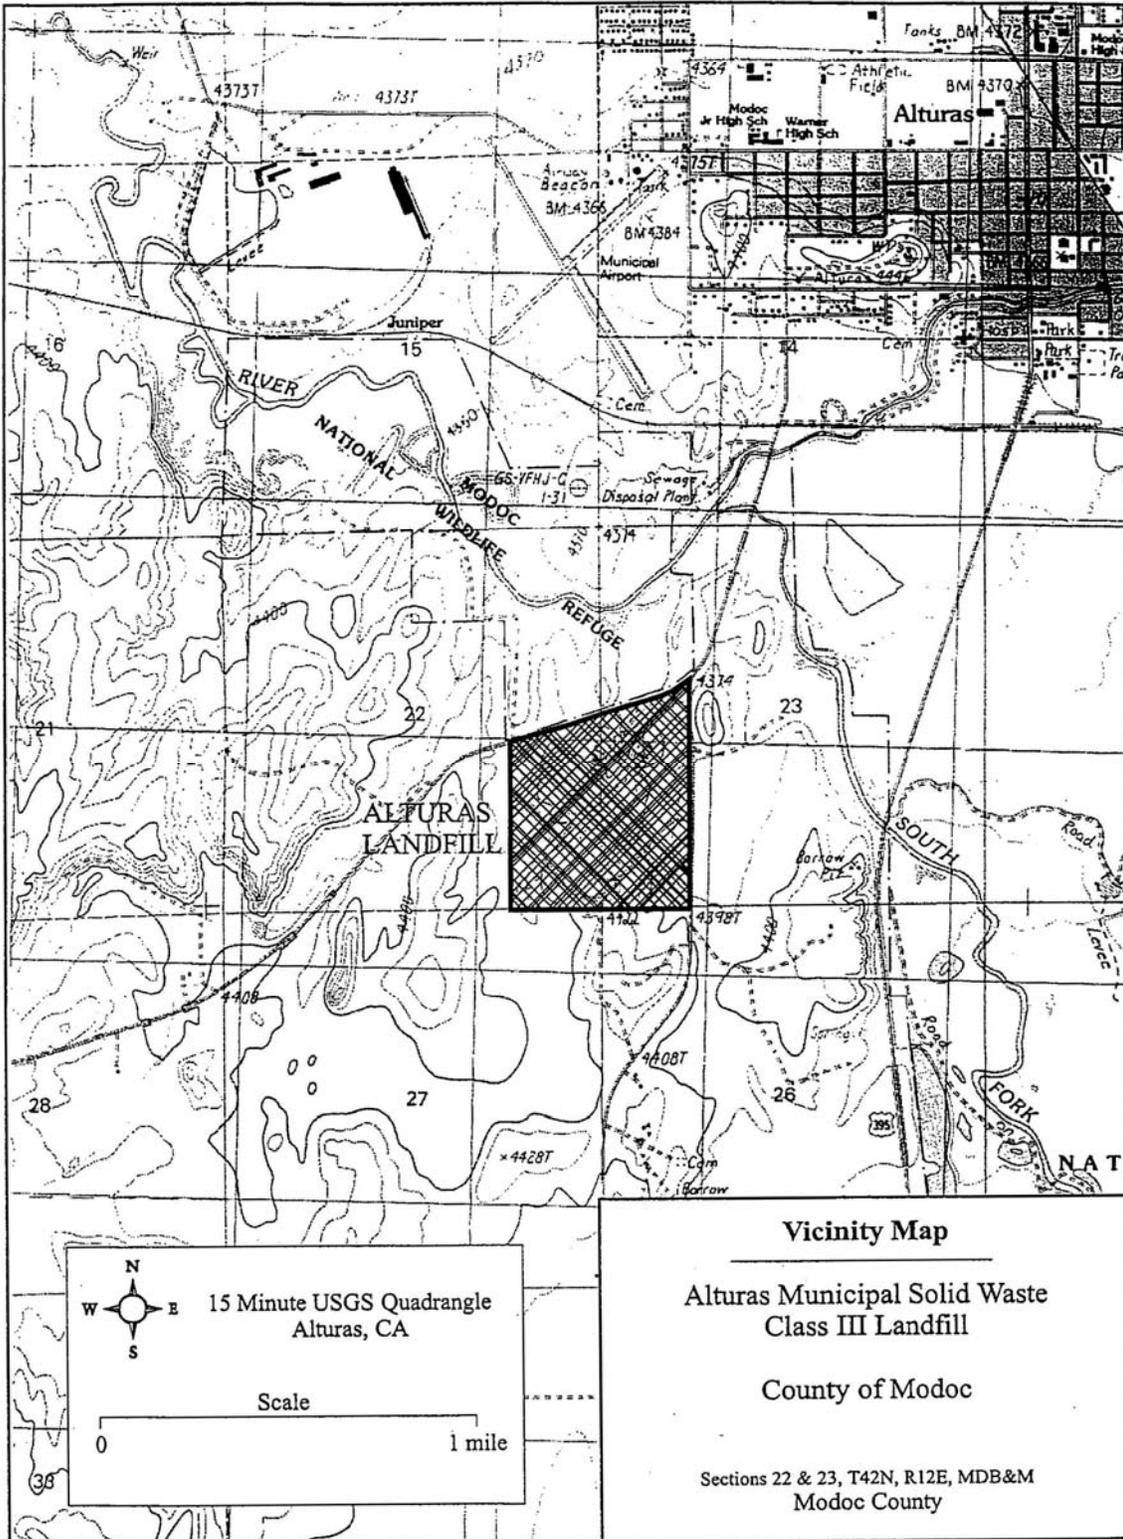

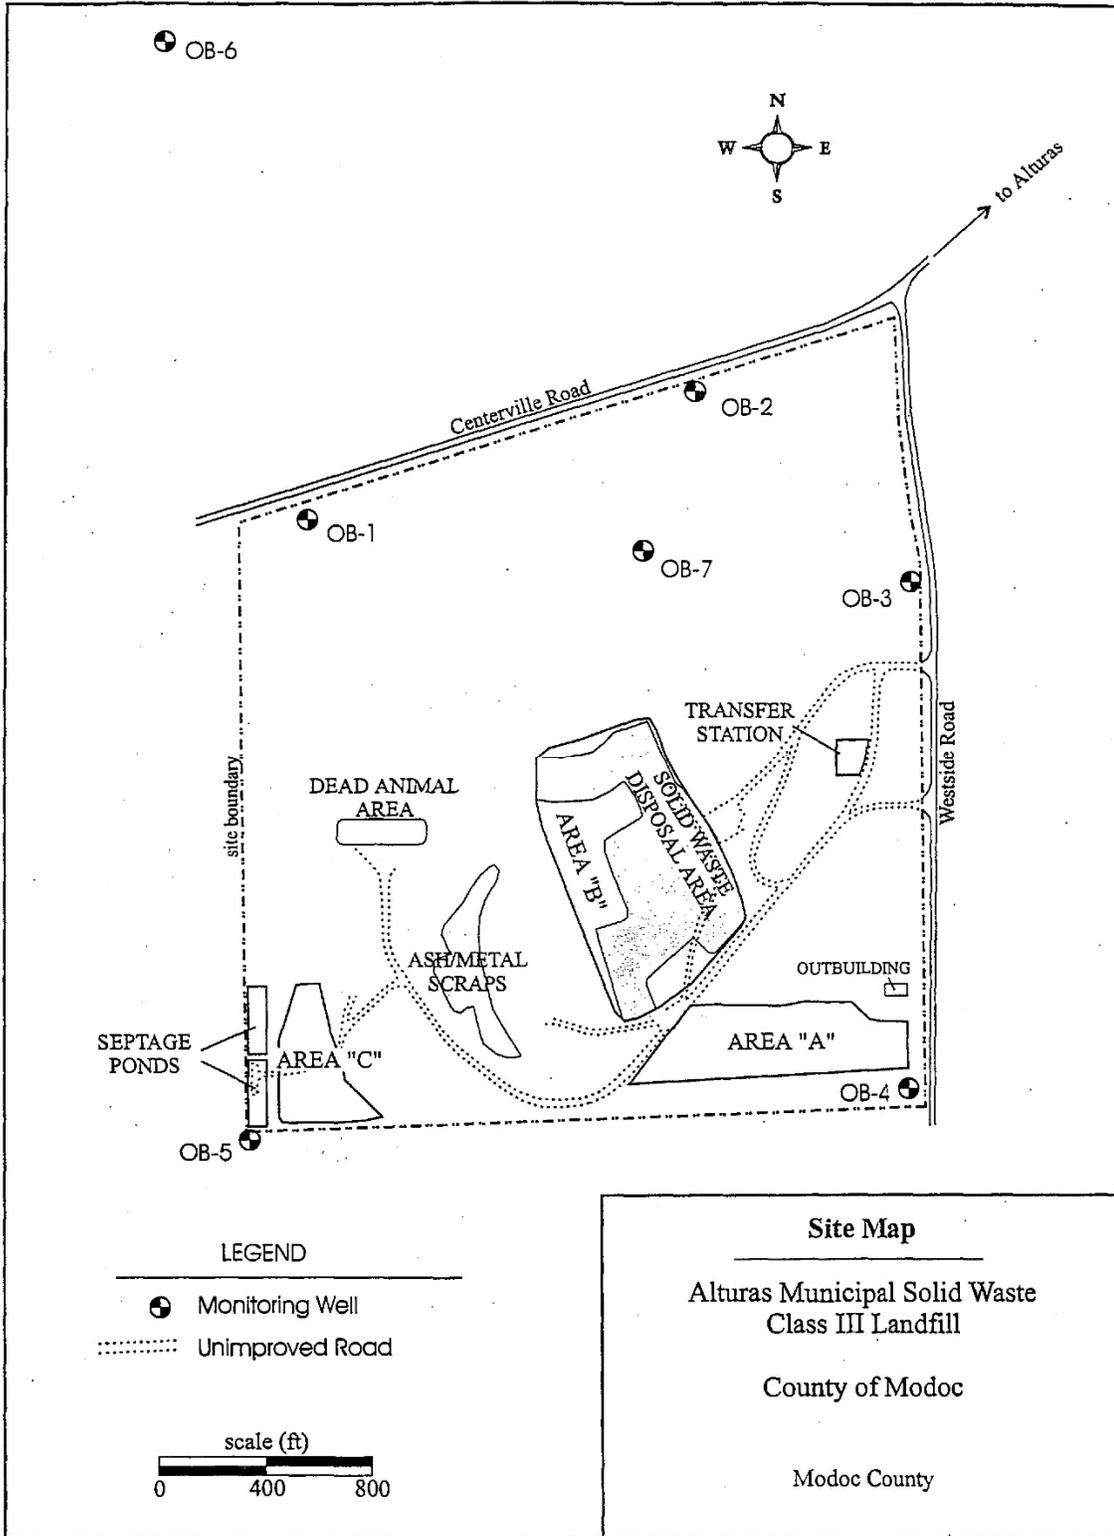

INFORMATION SHEET  
ORDER NO. R5-2018-0025  
COUNTY OF MODOC  
ALTURAS CLASS III MUNICIPAL SOLID WASTE LANDFILL  
MODOC COUNTY

The Alturas Landfill (Facility) is a Class III municipal solid waste (“MSW”) landfill located approximately two miles south of the City of Alturas in Modoc County. County of Modoc owns the Facility and began operating the landfill in 1969 as a Class II limited disposal site that functioned as a canyon-fill operation. In November 1987, the Facility was reclassified as a Class III landfill. The Facility stopped accepting MSW in 1995 and functions primarily as a transfer station. Currently, MSW from the site’s service area is redirected to a landfill near Reno, Nevada, except as emergency backup when waste cannot be transported to an off-site landfill. Scrap metal, white goods and tires are also stockpiled at the Facility and periodically hauled away by private contractors. Additionally, the Facility is used as a disposal site for inert construction debris, green waste, septage and dead animals. The landfill property covers approximately 162 acres, of which approximately 29 acres are associated with landfill activities, including waste disposal, transfer facilities, administrative uses, Facility operations and roads.

The Facility has five unlined solid waste units (“WMUs”) and two unlined surface impoundments (as shown in Attachment B). The Facility does not have any leachate control and removal, leakage detection systems, or vadose zone monitoring. Unit A, a seven acre unit containing MSW, has been inactive since 1985 when an interim cover waste placed over the unit. Unit B occupies 15 acres and is an active solid waste WMU; the unit receives MSW (emergency backup only), inert construction debris, and green waste. Unit C, an approximately three acre unit containing MSW, has been inactive since 1976 when an interim cover was placed over the unit. The Dead Animal Disposal Unit occupies less than one acre and is still in use. The Woodash and Metal Unit occupies approximately two acres, and became inactive in 1989 when an interim cover was placed on the unit. The landfill units are unlined and predate the requirements set forth under Title 27, section 20080(d) established in 1984. The two surface impoundments (“Septage Ponds”) receive septage sludge from local septic tanks, and have not been excavated for several years.

Lands surrounding the Facility are used for agriculture, and a federal game refuge. The Facility receives an annual average of approximately 12 inches of precipitation as rainfall and 17 inches as snowfall and has a mean pan evaporation of approximately 51 inches per year. The Facility generally slopes to the east toward the Pit River.

The Facility is underlain by volcanic deposits belonging to the Warm Springs Tuff member of the Alturas Formation. These deposits include loose, unconsolidated clayey sands, gravels, tuffs, and breccias. A thin layer of soil (one to two feet thick) covers the Facility. The tuffs and breccias contain the waste disposal trenches. Field observations indicate permeability is relatively high and influenced locally by cracks and fissures. The first encountered groundwater ranges from about four feet to 31 feet below the native ground surface. Groundwater elevations range from about 4,348 feet MSL to 4,356 feet MSL. The principal water-bearing formations in the Alturas Basin are lava flows and the Alturas Formation, which contains both confined and unconfined aquifers.

Seven monitoring wells are incorporated into monitoring and reporting as specified in the Monitoring and Reporting Program No. R5-2018-0025. The monitoring wells were installed into three different geologic formations. Wells OB-1 and OB-5 are screened in volcanic deposits of the Warm Springs Tuff Formation, wells OB-3 and OB-4 are screened in silt and clay deposits of the Alturas Formation, and wells OB-2, OB-6 and OB-7 are screened in sand and gravel deposits of intermediate alluvium. Total depths of the wells range from 15 to 56.5 feet below ground surface. Based on the available data, the Facility has not impacted groundwater.

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

STANDARD PROVISIONS AND REPORTING REQUIREMENTS  
FOR  
WASTE DISCHARGE REQUIREMENTS  
FOR  
NONHAZARDOUS SOLID WASTE DISCHARGES  
REGULATED BY SUBTITLE D AND/OR TITLE 27  
(40 C.F.R. section 258 and Title 27, § 20005 et seq.)

December 2015

**TABLE OF CONTENTS**

<b>Section</b>	<b>Page</b>
A. APPLICABILITY .....	2
B. TERMS AND CONDITIONS .....	2
C. STANDARD PROHIBITIONS .....	4
D. STANDARD DISCHARGE SPECIFICATIONS .....	5
E. STANDARD FACILITY SPECIFICATIONS .....	6
F. STANDARD CONSTRUCTION SPECIFICATIONS .....	8
G. STANDARD CLOSURE AND POST-CLOSURE SPECIFICATIONS .....	11
H. STANDARD FINANCIAL ASSURANCE PROVISIONS .....	15
I. STANDARD MONITORING SPECIFICATIONS .....	15
J. RESPONSE TO A RELEASE .....	25
K. GENERAL PROVISIONS .....	27
L. STORM WATER PROVISIONS .....	29

## **A. APPLICABILITY**

1. These Standard Provisions and Reporting Requirements (SPRRs) are applicable to nonhazardous solid waste disposal sites that are regulated by the Central Valley Regional Water Quality Control Board (hereafter, Central Valley Water Board) pursuant to the provisions of California Code of Regulations, title 27 ("Title 27"), section 20005 et seq., and municipal solid waste (MSW) landfills that are subject to the Federal Subtitle D regulations contained in 40 Code of Federal Regulations section 258 (hereafter, "Subtitle D" or "40 C.F.R. § 258.XX") in accordance with State Water Resources Control Board (State Water Board) Resolution 93-62. The Subtitle D regulations are only applicable to MSW landfills and therefore any requirements in these SPRRs that are referenced as coming from Subtitle D are not applicable to non-MSW waste management units such as Class II surface impoundments, Class II waste piles, and non-MSW landfill units. All Subtitle D requirements in these SPRRs are referenced with "[40 C.F.R. § 258.XX]" after the requirement.
2. "Order," as used throughout this document, means the Waste Discharge Requirements (WDRs) to which these SPRRs are incorporated.
3. The requirements prescribed herein do not authorize the commission of any act causing injury to the property of another, and do not protect the Discharger from liabilities under federal, state, or local laws. This Order does not convey any property rights or exclusive privileges.
4. The provisions of this Order are severable. If any provision of this Order is held invalid, the remainder of this Order shall not be affected.
5. If there is any conflicting or contradictory language between the WDRs, the Monitoring and Reporting Program (MRP), or the SPRRs, then language in the WDRs shall govern over either the MRP or the SPRRs, and language in the MRP shall govern over the SPRRs.
6. If there is a site-specific need to change a requirement in these SPRRs for a particular landfill facility, the altered requirement shall be placed in the appropriate section of the WDRs and will supersede the corresponding SPRRs requirement. These SPRRs are standard and cannot be changed as part of the permit writing process or in response to comments, but they will be periodically updated on an as-needed basis.
7. Unless otherwise stated, all terms are as defined in Water Code section 13050 and in Title 27, section 20164.

## **B. TERMS AND CONDITIONS**

1. Failure to comply with any waste discharge requirement, monitoring and reporting requirement, or Standard Provisions and Reporting Requirement, or

- other order or prohibition issued, reissued, or amended by the Central Valley Water Board or the State Water Board, or intentionally or negligently discharging waste, or causing or permitting waste to be deposited where it is discharged into the waters of the state and creates a condition of pollution or nuisance, is a violation of this Order and the Water Code, which can result in the imposition of civil monetary liability [Wat. Code, § 13350(a)]
2. After notice and opportunity for a hearing, this Order may be terminated or modified for cause, including, but not limited to [Wat. Code, § 13381]:
    - a. Violation of any term or condition contained in this Order;
    - b. Obtaining this Order by misrepresentation, or failure to disclose fully all relevant facts;
    - c. A change in any condition that results in either a temporary or permanent need to reduce or eliminate the authorized discharge; or
    - d. A material change in the character, location, or volume of discharge.
  3. Before initiating a new discharge or making a material change in the character, location, or volume of an existing discharge, the Discharger shall file a new report of waste discharge (ROWD), or other appropriate joint technical document (JTD), with the Central Valley Water Board [Wat. Code, § 13260(c) and § 13264(a)]. A material change includes, but is not limited to, the following:
    - a. An increase in area or depth to be used for solid waste disposal beyond that specified in waste discharge requirements;
    - b. A significant change in disposal method, location, or volume (e.g., change from land disposal to land treatment);
    - c. A change in the type of waste being accepted for disposal; or
    - d. A change to previously-approved liner systems or final cover systems that would eliminate components or reduce the engineering properties of components.
  4. Representatives of the Central Valley Water Board may inspect the facilities to ascertain compliance with the waste discharge requirements. The inspection shall be made with the consent of the owner or possessor of the facilities or, if the consent is refused, with a duly issued warrant. However, in the event of an emergency affecting the public health or safety, an inspection may be made without consent or the issuance of a warrant [Wat. Code, §13267(c)].

5. The Central Valley Water Board will review this Order periodically and will revise these waste discharge requirements when necessary [Wat. Code, § 13263(e) and Title 27, § 21720(b)].
6. Except for material determined to be confidential in accordance with California law and regulations, all reports prepared in accordance with terms of this Order shall be available for public inspection at the offices of the Central Valley Water Board [Wat. Code, § 13267(b)]. Data on waste discharges, water quality, geology, and hydrogeology shall not be considered confidential.
7. A discharge of waste into the waters of the state is a privilege, not a right. No discharge of waste into waters of the state, whether or not the discharge is made pursuant to waste discharge requirements, shall create a vested right to continue the discharge [Wat. Code, § 13263(g)].
8. Technical and monitoring reports specified in this Order are requested pursuant to the Water Code [§13267(b)]. Failure to furnish the reports by the specified deadlines or falsifying information in the reports, are misdemeanors that may be liable civilly in accordance with §13268(b) of the Water Code [Wat. Code, §13268(a)].

### **C. STANDARD PROHIBITIONS**

1. The discharge of liquid or semi-solid waste (waste containing less than 50 percent solids) is prohibited, except for the following when proposed in the ROWD/JTD and approved by this Order:
  - a. Dewatered sewage or water treatment sludge as described in Title 27, section 20220(c) provided it is discharged above a composite liner with a leachate collection and removal system (LCRS) [Title 27, § 20200(d)(3)].
  - b. Leachate and/or landfill gas condensate that is returned to the composite-lined waste management unit (with an LCRS) from which it came [Title 27, § 20340(g) and 40 C.F.R. § 258.28].
2. The discharge of wastes which have the potential to reduce or impair the integrity of containment structures or which, if commingled with other wastes in the waste management unit, could produce violent reaction, heat or pressure, fire or explosion, toxic by-products, or reaction products, which, in turn:
  - a. require a higher level of containment than provided by the unit; or
  - b. are 'restricted wastes'; or
  - c. impair the integrity of containment structures;is prohibited [Title 27, § 20200(b)].

3. The discharge of wastes outside of a waste management unit or portions of a unit specifically designed for their containment is prohibited.
4. The discharge of solid waste containing free liquid or which may contain liquid in excess of the moisture holding capacity as a result of waste management operations, compaction or settlement is prohibited.
5. The discharge of waste to a closed landfill unit is prohibited.
6. The discharge of waste constituents to the unsaturated zone or to groundwater is prohibited.
7. The discharge of solid or liquid waste or leachate to surface waters, surface water drainage courses, or groundwater is prohibited.

#### **D. STANDARD DISCHARGE SPECIFICATIONS**

1. The Discharger is responsible for accurate characterization of wastes, including a determination of whether or not wastes will be compatible with containment features and other wastes at the waste management unit and whether or not the wastes are required to be managed as a hazardous waste [Title 27, § 20200(c)] or designated waste [Title 27, § 20210].
2. Leachate and landfill gas condensate collected from a waste management unit shall be discharged to the unit from which it came, or discharged to an appropriate waste management unit in accordance with Title 27 and in a manner consistent with the waste classification of the liquid [Title 27, § 20200(d) and § 20340(g)].
3. The discharge of leachate or landfill gas condensate is restricted to those portions of a waste management unit that has a composite liner system and LCRS meeting the Federal Subtitle D requirements [40 C.F.R. § 258.28].
4. Leachate and condensate returned to a composite-lined landfill unit (when approved by this Order) shall be discharged and managed such that it does not cause instability of the waste, does not cause leachate seeps, does not generate additional landfill gas that is not extracted from the landfill by an active landfill gas extraction system, does not cause contaminants to enter surface water runoff, and does not cause leachate volumes to exceed the maximum capacity of the LCRS.
5. Any discharge of waste outside the portion of the landfill that was already covered with waste as of the landfill unit's respective Federal Deadline constitutes a "lateral expansion" and requires the installation of an approved composite liner system and LCRS [40 C.F.R. § 258.40(b)].

6. Wastes shall be discharged only into waste management units specifically designed for their containment and/or treatment, as described in this Order.
7. The discharge shall remain within the designated disposal area at all times.
8. The discharge of waste shall not cause a nuisance condition [Wat. Code, § 13050(m)].

#### **E. STANDARD FACILITY SPECIFICATIONS**

1. All waste management units shall be designed, constructed, and operated to ensure that wastes, including leachate, will be a minimum of 5 feet above the highest anticipated elevation of underlying groundwater [Title 27, § 20240(c)], including the capillary fringe.
2. Surface and subsurface drainage from outside of a waste management unit shall be diverted from the unit [Title 27, § 20365(e)].
3. Interim cover is daily and intermediate cover [Title 27, § 20750(a)]. Interim cover over wastes discharged to a landfill shall be designed and constructed to minimize percolation of liquids through the wastes [Title 27, § 20705(b)].
4. Intermediate cover consisting of compacted earthen material of at least twelve (12) inches shall be placed on all surfaces of the fill where no additional solid waste will be deposited within **180 days** [Title 27, § 20700(a)].
5. During wet weather conditions, the facility shall be operated and graded to minimize leachate generation.
6. The Discharger shall **immediately** notify the Central Valley Water Board staff of any slope failure occurring at a waste management unit. Any failure which threatens the integrity of containment features or the waste management unit shall be promptly corrected in accordance with an approved method [Title 27, § 21710(c)(2)].
7. The Discharger shall **immediately** notify Central Valley Water Board staff of any flooding, unpermitted discharge of waste off-site or outside of waste management units, equipment failure, or other change in site conditions which could impair the integrity of waste or leachate containment facilities or precipitation and drainage control structures.
8. The Discharger shall limit water used for facility maintenance within landfill areas to the minimum amount necessary for dust control and construction.
9. The Discharger shall maintain in good working order any facility, control system, or monitoring device installed to achieve compliance with the waste discharge requirements.

10. The Discharger shall lock all groundwater monitoring wells with a lock on the well cap or monitoring well box. All monitoring devices shall be clearly labeled with their designation including all monitoring wells, LCRS risers, and lysimeter risers and shall be easily accessible for required monitoring by authorized personnel. Each monitoring device shall be clearly visible and be protected from damage by equipment or vehicles.
11. The Discharger shall ensure that methane and other landfill gases are adequately vented, removed from landfill units, or otherwise controlled to prevent the danger of adverse health effects, nuisance conditions, degradation, or the impairment of the beneficial uses of surface water or groundwater due to migration through the unsaturated zone.
12. The Discharger shall maintain the depth of the fluid in the sump of each landfill unit at the minimum needed for efficient pump operation (the depth at which the pump turns on given the pump intake height and maximum pump cycle frequency).
13. The depth of fluid on the landfill liner shall not exceed **30 centimeters** (cm) [40 C.F.R. § 258.40(a)(2)]. This regulation is interpreted by the Central Valley Water Board to exclude the leachate sump. The Discharger shall **immediately** notify the Central Valley Water Board staff by telephone, and follow up in writing within **seven** days if monitoring reveals that the depth of fluid on any portion of the liner (excluding the sump) exceeds 30 cm (approximately 12 inches). The written notification shall include a timetable for remedial or corrective action necessary to achieve compliance with the leachate depth limitation.
14. Each LCRS shall be tested at least annually to demonstrate proper operation. The results of the tests shall be compared with earlier tests made under comparable conditions [Title 27, § 20340(d)].
15. The Discharger shall maintain a *Storm Water Pollution Prevention Plan and Monitoring Program and Reporting Requirements* in accordance with State Water Board Order No. 2014-0057-DWQ (Industrial General Permit) or most recent general industrial storm water permit), or retain all storm water on-site.
16. Internal site drainage from surface or subsurface sources shall not contact or percolate through wastes.
17. New MSW landfill units or lateral expansions of existing units shall not be sited in a "wetland" [as defined in 40 C.F.R. § 232.29(r)] unless there is no practical alternative; steps have been taken to assure no net loss of wetland; the landfill unit will not degrade the wetland; the unit will not jeopardize threatened or endangered species or produce adverse modification of a critical habitat or violate any requirement of the Marine Protection, Research, and Sanctuaries Act of 1972 [40 C.F.R. § 258.12].

## F. STANDARD CONSTRUCTION SPECIFICATIONS

1. The Discharger shall submit for review and approval at least **90 days** prior to proposed construction, design plans and specifications for new landfill modules that include the following:
  - a. Detailed construction drawings showing all required liner system components, the LCRS, leachate sump, unsaturated zone monitoring system, any proposed landfill gas monitoring and extraction points, and access to the LCRS for required annual testing.
  - b. A Construction Quality Assurance (CQA) Plan prepared by a California-registered civil engineer or certified engineering geologist, and that meets the requirements of Title 27, section 20324.
  - c. A geotechnical evaluation of the area soils, evaluating their use as the base layer or reference to the location of this information in the ROWD/JTD [Title 27, § 21750(f)(4)].
  - d. Information about the seismic design of the proposed new module (or reference to the location of this information in the ROWD/JTD) in accordance with Title 27, section 20370.
  - e. A revised water quality monitoring plan for groundwater detection monitoring (or information showing the existing plan is adequate) in accordance with Title 27, section 20415.
  - f. An Operation Plan (or reference to the location of this information in the ROWD/JTD) meeting the requirements of Title 27, section 21760(b).
2. All containment structures shall be designed by, and construction shall be supervised by, a California registered civil engineer or a certified engineering geologist, and shall be certified by that individual as meeting the prescriptive standards, or approved engineered alternative design, in accordance with this Order prior to waste discharge.
3. The Discharger shall not proceed with construction until the construction plans, specifications, and all applicable construction quality assurance plans have been approved. Waste management units shall receive a final inspection and approval of the construction by Central Valley Water Board staff before use of the unit commences [Title 27, § 20310(e)].
4. Any report, or any amendment or revision of a report, that proposes a design or design change that might affect a waste management unit's containment features or monitoring systems shall be approved by a California registered civil engineer or a certified engineering geologist [Title 27, § 21710(d)].

5. Materials used in containment structures shall have appropriate chemical and physical properties to ensure that such structures do not fail to contain waste because of pressure gradients, physical contact with waste or leachate, chemical reactions with soil or rock, climatic conditions, the stress of installation, or because of the stress of daily operations [Title 27, § 20320(a)].
6. Waste management units and their respective containment structures shall be designed and constructed to limit, to the greatest extent possible, ponding, infiltration, inundation, erosion, slope failure, washout, and overtopping [Title 27, § 20365(a)].
7. The Discharger shall design storm water conveyance systems for Class III units for a 100-year, 24-hour storm event, and shall design storm water conveyance systems for Class II units for a 1,000-year, 24-hour storm event [Title 27, § 21750(e)(3)].
8. All Class III landfill units shall be designed to withstand the maximum probable earthquake and Class II waste management units shall be designed to withstand maximum credible earthquake without damage to the foundation or to the structures that control leachate, or surface drainage, or erosion, or gas [Title 27, § 20370(a)].
9. The Discharger shall perform stability analyses that include components to demonstrate the integrity of the landfill foundation, final slopes, and containment systems under both static and dynamic conditions throughout the landfill's life including the closure period and post-closure maintenance period [Title 27, § 21750(f)(5)].
10. New waste management units and expansions of existing units shall not be located on a known Holocene fault [Title 27, § 20260(d)].
11. Liners shall be designed and constructed to contain the fluid, including landfill gas, waste, and leachate [Title 27, § 20330(a)].
12. Hydraulic conductivities shall be determined primarily by appropriate field test methods in accordance with accepted civil engineering practice. The results of laboratory tests with both water and leachate, and field tests with water, shall be compared to evaluate how the field permeabilities will be affected by leachate. It is acceptable for the Discharger to use appropriate compaction tests in conjunction with laboratory hydraulic conductivity tests to determine field permeabilities as long as a reasonable number of field hydraulic conductivity tests are also conducted [Title 27, § 20320(c)].
13. Hydraulic conductivities specified for containment structures other than the final cover shall be relative to the fluids (leachate) to be contained. Hydraulic conductivities for the final cover shall be relative to water [Title 27, § 20320(b)].

14. A test pad for each barrier layer and final cover shall be constructed in a manner duplicating the field construction. Test pad construction methods, with the designated equipment, shall be used to determine if the specified density/moisture-content/hydraulic conductivity relationships determined in the laboratory can be achieved in the field with the compaction equipment to be used and at the specified lift thickness [Title 27, § 20324(g)(1)(A)].
15. Performance requirements for geosynthetic membranes shall include, but are not limited to, a need to limit infiltration of water, to the greatest extent possible; a need to control landfill gas emissions; mechanical compatibility with stresses caused by equipment traffic, and for final covers the result of differential settlement over time and durability throughout the post-closure maintenance period [Title 27, § 20324(i)(1)].
16. The Discharger shall ensure proper preparation of the subgrade for any liner system that includes a GCL so as to provide a smooth surface that is free from rocks, sticks, or other debris that could damage or otherwise limit the performance of the GCL.
17. The Discharger shall propose an electronic leak location survey of the top liner for any new landfill module in the construction quality assurance plan unless the Discharger demonstrates that a leak location survey is not needed.
18. Leachate collection and removal systems are required for Class II landfills and surface impoundments, MSW landfills, and for Class III landfills which have a liner or which accept sewage or water treatment sludge [Title 27, § 20340(a)].
19. All new landfill units or lateral expansions of existing units that require a LCRS shall have a blanket-type LCRS that covers the bottom of the unit and extends as far up the sides as possible. The LCRS shall be of sufficient strength and thickness to prevent collapse under the pressures exerted by overlying wastes, waste cover materials, and by any equipment used at the unit [Title 27, § 20340(e)].
20. The LCRS shall be designed, constructed, maintained, and operated to collect and remove twice the maximum anticipated daily volume of leachate from the waste management unit [Title 27, § 20340(b)].
21. Leachate collection and removal systems shall be designed and operated to function without clogging through the scheduled closure of the landfill unit and during the post-closure maintenance period.
22. The LCRS shall be designed to maintain the depth of fluid over any portion of the LCRS of no greater than 30 cm [40 C.F.R. § 258.40(a)(2)], excluding the leachate sump. The leachate sump, leachate removal pump, and pump controls shall be designed and set to maintain a fluid depth no greater than the minimum needed for efficient pump operation [Title 27, § 20340(c)].

23. All construction of liner systems and final cover systems shall be performed in accordance with a Construction Quality Assurance Plan certified by a registered civil engineer or a certified engineering geologist [Title 27, § 20323].
24. The Construction Quality Assurance program shall be supervised by a registered civil engineer or a certified engineering geologist who shall be designated the CQA officer [Title 27, § 20324(b)(2)].
25. The Discharger shall ensure that a third party independent of both the Discharger and the construction contractor performs all of the construction quality assurance monitoring and testing during the construction of a liner system.
26. The Discharger shall notify Central Valley Water Board staff at least **14 days** prior to commencing field construction activities including construction of a new lined cell or module, construction of a final cover, or any other construction that requires Central Valley Water Board staff approval under this Order.
27. The Discharger shall submit for review and approval at least **60 days** prior to proposed discharge, final documentation required in Title 27 Section 20324(d)(1)(C) following the completion of construction of a new lined landfill module. The report shall be certified by a registered civil engineer or a certified engineering geologist and include a statement that the liner system was constructed in accordance with the approved design plans and specifications, the CQA Plan, the requirements of the WDRs, and that it meets the performance goals of Title 27. The report shall contain sufficient information and test results to verify that construction was in accordance with the design plans and specifications, the construction quality assurance plan, and the performance goals of Title 27.
28. The Discharger shall not discharge waste onto a newly constructed liner system until the final documentation report has been reviewed and an acceptance letter has been received.
29. Prior to placement of waste in a new landfill unit, the Discharger shall monitor any pan lysimeter for the unit that has received enough rainfall to flood the LCRS sump. If liquid is detected in the pan lysimeter, the Discharger shall verify that the liquid is not from a leak in the primary liner system before waste can be accepted to the new module.

#### **G. STANDARD CLOSURE AND POST-CLOSURE SPECIFICATIONS**

1. The Discharger shall submit a final or partial final closure and post-closure maintenance plan at least **two years** prior to the anticipated date of closure [Title 27, § 21780(d)(1)].

2. The Discharger shall notify the Central Valley Water Board in writing that a landfill unit or portion of a unit is to be closed either at the same time that the California Department of Resources Recycling and Recovery (CalRecycle) is notified or **180 days** prior to beginning any final closure activities, whichever is sooner [Title 27, § 21710(c)(5)(A)]. The notice shall include a statement that all closure activities will conform to the most recently approved final or partial final closure plan and that the plan provides for site closure in compliance with all applicable federal and state regulations [Title 27, § 21710(c)(5)(C)].
3. Initiation of closure activities shall begin within **30 days** of final waste receipt, or within **one year** of receipt of most recent waste if additional capacity remains [40 C.F.R. § 258.60(f)].
4. Closure activities shall be completed within **180 days** of the beginning of closure activities unless an extension is granted by the Executive Officer [40 C.F.R. § 258.60(g)].
5. The Discharger shall carry out both mandatory closure and normal closure of a waste management unit or a portion of a unit in accordance with a closure and post-closure maintenance plan approved by the Central Valley Water Board [Title 27, § 20950(a)(1)] through the issuance of closure waste discharge requirements.
6. The Discharger shall notify the Central Valley Water Board that a preliminary closure and post-closure maintenance plan has been prepared and placed in the operating record by the date of initial receipt of waste at any new MSW landfill unit or lateral expansion of any existing unit [40 C.F.R. § 258.60(d)]. This notification shall be included in the cover letter transmitting the preliminary closure and post-closure maintenance plan.
7. In addition to the applicable provisions of Title 27, the preliminary closure and/or the post-closure maintenance plans for MSW landfill units shall include the following:
  - a. A description of the steps necessary to close all MSW landfill units at any point during their active life in accordance with the cover design requirements [40 C.F.R. § 258.60(c)];
  - b. An estimate of the largest area of the landfill unit(s) ever requiring a final cover at any time during the active life of the unit(s) [40 C.F.R. § 258.60(c)(2)];
  - c. An estimate of the maximum inventory of wastes ever on-site over the active life of the waste management facility [40 C.F.R. § 258.60(c)(3)]; and
  - d. A schedule for completing all activities necessary to satisfy the closure criteria in 40 C.F.R. section 258.60 [40 C.F.R. § 258.60(c)(4)].

8. The final closure and post-closure maintenance plan for the waste management unit shall include at least the following: an itemized cost analysis, closure schedule, any proposed final treatment procedures, map, changes to the unit description presented in the most recent ROWD, federal requirements for a MSW facility, land use of the closed unit, and a construction quality assurance plan [Title 27, § 21769(c) & (d)].
9. Closure of each waste management unit shall be under the direct supervision of a registered civil engineer or certified engineering geologist [Title 27, § 20950(b)].
10. The final cover of closed landfills shall be designed, graded, and maintained to prevent ponding and soil erosion due to high run-off velocities [Title 27, § 21090(b)(1)(A)].
11. The final grading design shall be designed and approved by a registered civil engineer or certified engineering geologist [Title 27, § 21090(b)(1)(C)].
12. All final cover designs shall include a minimum 1-foot thick erosion resistant layer [Title 27, § 21090(a)(3)(A)].
13. The Discharger shall close the landfill with minimum 15-foot wide benches every 50 vertical feet [Title 27, § 21090(a)].
14. Final cover slopes shall not be steeper than a horizontal to vertical ratio of one and three quarters to one and designs having any slopes steeper than a horizontal to vertical ratio of three to one, or having a geosynthetic component, shall have these aspects of their design specifically supported in the slope stability report required in Title 27, section 21750(f)(5) [Title 27, § 21090(a)].
15. For any portions of the final cover installed after July 18, 1997, for which the Central Valley Water Board has not approved a slope and foundation stability report on or before that date, the Discharger shall meet the requirements of Title 27, section 21750(f)(5) [Title 27, § 21090(a)(6)].
16. Areas with slopes greater than ten percent, surface drainage courses, and areas subject to erosion by wind or water shall be designed and constructed to prevent such erosion [Title 27, § 21090(b)(2)].
17. The Discharger shall design storm water conveyance systems for closed Class III units for a 100-year, 24-hour storm event, and shall design storm water conveyance systems for closed Class II units for a 1,000-year, 24-hour storm event [Title 27, § 21750(e)(3)].
18. Closed landfill units shall be provided with at least two permanent surveying monuments, installed by a licensed land surveyor or by a registered civil engineer, from which the location and elevation of all wastes, containment

structures, and monitoring facilities can be determined throughout the post-closure maintenance period [Title 27, § 20950(d)].

19. Following closure of any MSW landfill units, the Discharger shall notify the Executive Officer that the deed to the landfill facility property, or some other instrument that is normally examined during a title search, has been recorded and a copy placed in the operating record. The notation on the deed shall in perpetuity notify any potential purchaser of the property that the land has been used as a landfill facility and that use of the land is restricted to the planned use described in the post-closure maintenance plan [Title 27, § 20515(a)(4) and §21170, and 40 C.F.R. § 258.60(i)].
20. Construction or repair of the final cover system's low-hydraulic conductivity layer is to be carried out in accordance with an approved construction quality assurance plan [Title 27, § 21090(b)(1)(E)].
21. The Discharger shall incorporate into the closure and post-closure maintenance plan a cover-integrity monitoring and maintenance program which includes at least the following: a periodic leak search, periodic identification of other problem areas, prompt cover repair, and vegetation maintenance [Title 27, § 21090(a)(4)].
22. The Discharger shall complete a final cover survey upon completion of closure activities for that portion of the landfill. The final cover surveys shall include an initial survey and map [Title 27, § 21090(e)(1). Every **five years**, the Discharger shall conduct a survey of the closed landfill cover and submit an iso-settlement map accurately depicting the estimated total change in elevation of each portion of the final cover's low-hydraulic-conductivity layer [Title 27, § 21090(e)(2)].
23. Within **30 days** of completion of all closure activities, the Discharger shall certify that all closure activities were performed in accordance with the most recently approved final closure plan and CQA Plan, and in accordance with all applicable regulations. The Discharger shall also certify that closed landfill units shall be maintained in accordance with and approved post-closure maintenance plan [Title 27, § 21710(c)(6)].
24. Within **180 days** of completion of closure construction activities, the Discharger shall submit final documentation of closure, including the Certification of Closure. The closure documents shall include a final construction quality assurance report and any other documents necessary to support the certification [Title 27, § 21880].
25. The post-closure maintenance period shall continue until the Central Valley Water Board determines that wastes remaining in the landfill unit(s) no longer pose a threat to water quality [Title 27, § 20950(a)(1)].

26. The Discharger shall conduct a periodic leak search to monitor of the integrity of the final cover in accordance with the schedule in the approved final post-closure maintenance plan [Title 27, § 21090(a)(4)(A)].
27. The Discharger shall periodically inspect and identify problems with the final cover including areas that require replanting, erosion, areas lacking free drainage, areas damaged by equipment operations, and localized areas identified in the required five-year iso-settlement survey [Title 27, § 21090(a)(4)(B)].
28. The Discharger shall repair the cover promptly in accordance with a cover repair plan to be included in the final post-closure maintenance plan [Title 27, § 21090(a)(4)(C)].
29. Throughout the post-closure maintenance period, the Discharger shall maintain the structural integrity and effectiveness of all containment structures, maintain the final cover as necessary to correct the effects of settlement and other adverse factors, continue to operate the LCRS as long as leachate is generated and detected, maintain the monitoring systems, prevent erosion and related damage of the final cover due to drainage, and protect and maintain surveyed monuments [Title 27, § 21090(c)].
30. Post-closure maintenance shall be conducted for a minimum period of **30 years** or until the waste no longer poses a threat to environmental quality, whichever is greater [Title 27, § 21180(a) and Title 27, § 21900(a)].

#### **H. STANDARD FINANCIAL ASSURANCE PROVISIONS**

1. The Discharger shall establish an irrevocable fund for closure and post-closure maintenance to ensure closure and post-closure maintenance of each classified unit in accordance with an approved closure and post-closure maintenance plan [Title 27, § 20950(f) and § 22207(a)].
2. The Discharger shall obtain and maintain assurances of financial responsibility for initiating and completing corrective action for all known and reasonably foreseeable releases from the waste management unit [Title 27, §20380(b), § 22221, and § 22222].

#### **I. STANDARD MONITORING SPECIFICATIONS**

1. The water quality monitoring program shall include appropriate and consistent sampling and analytical procedures and methods designed to ensure that monitoring results provide a reliable indication of water quality at all monitoring points and background monitoring points [Title 27, § 20415(e)(4) and 40 C.F.R. § 258.53(b)].

2. All monitoring systems shall be designed and certified by a registered geologist or a registered civil engineer [Title 27, § 20415(e)(1)].
3. All monitoring wells shall be cased and constructed in a manner that maintains the integrity of the monitoring well bore hole and prevents the bore hole from acting as a conduit for contaminant transport [Title 27, § 20415(b)(4)(A)].
4. All sample chemical analyses of any material shall be performed by a laboratory certified by the California Department of Health Services [Wat. Code, § 13176(a)].
5. A Detection Monitoring Program for a new landfill facility shall be installed, operational, and one year of monitoring data collected from background monitoring points prior to the discharge of wastes [Title 27, § 20415(e)(6)].
6. Background for water samples or soil-pore gas samples shall be represented by the data from all samples taken from applicable background monitoring points during that reporting period (at least one sample from each background monitoring point).
7. The Discharger shall submit for approval, establish, and maintain an approved Sample Collection and Analysis Plan. The Sample Collection and Analysis Plan shall at a minimum include:
  - a. Sample collection procedures describing purging techniques, sampling equipment, and decontamination of sampling equipment;
  - b. Sample preservation information and shipment procedures;
  - c. Sample analytical methods and procedures;
  - d. Sample quality assurance/quality control (QA/QC) procedures;
  - e. Chain of Custody control; and
  - f. Sample analysis information including sample preparation techniques to avoid matrix interferences, method detection limits (MDLs), practical quantitation limits (PQLs) and reporting limits (RLs), and procedures for reporting trace results between the MDL and PQL.

If required by the Executive Officer, the Discharger shall modify the Sample Collection and Analysis Plan to conform with this Order.

8. For any given monitored medium, the samples taken from all monitoring points and background monitoring points to satisfy the data analysis requirements for a given reporting period shall all be taken **within a span not to exceed 30 days**, unless a longer time period is approved, and shall be taken in a manner that

ensures sample independence to the greatest extent feasible. Specific methods of collection and analysis must be identified. Sample collection, storage, and analysis shall be performed according to the most recent version of USEPA Methods, such as the latest editions, as applicable, of: (1) Methods for the Analysis of Organics in Water and Wastewater (USEPA 600 Series), (2) Test Methods for Evaluating Solid Waste (SW-846, latest edition), and (3) Methods for Chemical Analysis of Water and Wastes (USEPA 600/4-79-020), and in accordance with the approved Sample Collection and Analysis Plan. Appropriate sample preparation techniques shall be used to minimize matrix interferences.

9. If methods other than USEPA-approved methods or Standard Methods are used, or there is a proposed alternant USEPA method than the one listed in the MRP, the proposed methodology shall be submitted for review and approval prior to use, including information showing its equivalence to the required method.
10. The **methods of analysis and the detection limits** used must be appropriate for the expected concentrations. For the monitoring of any constituent or parameter that is found in concentrations which produce more than 90% non-numerical determinations (i.e., "trace" or "ND") in data from background monitoring points for that medium, the analytical method having the lowest MDL shall be selected from among those methods which would provide valid results in light of any matrix effects or interferences.
11. The laboratory reporting limit (RL) for all reported monitoring data shall be set no greater than the practical quantitation limit (PQL).
12. **"Trace" results** - results falling between the MDL and the PQL - shall be reported as such, and shall be accompanied both by the estimated MDL and PQL values for that analytical run.
13. Laboratory data shall not be altered or revised by the Discharger. If the Discharger observes potential lab errors, it shall identify the issue in the monitoring report and shall describe steps that will be taken to prevent similar errors in the future.
14. **MDLs and PQLs** shall be derived by the laboratory for each analytical procedure, according to State of California laboratory accreditation procedures. These MDLs and PQLs shall reflect the detection and quantitation capabilities of the specific analytical procedure and equipment used by the lab, rather than simply being quoted from USEPA analytical method manuals. In relatively interference-free water, laboratory-derived MDLs and PQLs are expected to closely agree with published USEPA MDLs and PQLs. MDLs and PQLs shall be reported.

15. If the laboratory suspects that, due to a change in matrix or other effects, the true detection limit or quantitation limit for a particular analytical run differs significantly from the laboratory-derived MDL/PQL values, the results shall be flagged in the laboratory report accordingly, along with estimates of the detection limit and quantitation limit actually achieved. The **MDL shall always be calculated such that it represents the lowest achievable concentration associated with a 99% reliability of a nonzero result.** The PQL shall always be calculated such that it represents the lowest constituent concentration at which a numerical value can be assigned with reasonable certainty that it represents the constituent's actual concentration in the sample. Normally, PQLs should be set equal to the concentration of the lowest standard used to calibrate the analytical procedure.
16. All **QA/QC data** shall be reported, along with the sample results to which they apply, including the method, equipment, analytical detection and quantitation limits, the percent recovery, an explanation for any recovery that falls outside the QC limits, the results of equipment and method blanks, the results of spiked and surrogate samples, the frequency of quality control analysis, and the name and signature of a responsible person from the laboratory. **Sample results shall be reported unadjusted for blank results or spike recoveries.** In cases where contaminants are detected in QA/QC samples (i.e., field, trip, or lab blanks), the accompanying sample results shall be appropriately flagged, but the analytical results shall not be adjusted.
17. Unknown chromatographic peaks shall be reported, flagged, and tracked for potential comparison to subsequent unknown peaks that may be observed in future sampling events. Identification of unknown chromatographic peaks that recur in subsequent sampling events may be required.
18. The sampling interval of each monitoring well shall be appropriately screened and fitted with an appropriate filter pack to enable collection of representative groundwater samples [Title 27, § 20415(b)(4)(B)]. Groundwater samples shall not be field-filtered prior to laboratory analysis [40 C.F.R. § 258.53(b)]. Groundwater samples needing filtering (e.g., samples to be analyzed for dissolved metals) shall be filtered by the laboratory prior to analysis.
19. Groundwater elevations shall be measured in each well immediately prior to purging, each time groundwater is sampled. The owner or operator shall determine the rate and direction of groundwater flow each time groundwater is sampled. Groundwater elevations in wells which monitor the same waste management area shall be measured within a period of time short enough to avoid temporal variations in groundwater flow which could preclude accurate determination of groundwater flow rate and direction [40 C.F.R. § 258.53(d)].
20. Monitoring wells, piezometers, and other measurement, sampling, and analytical devices must be operated and maintained so that they perform to design

specifications throughout the life of the monitoring program [40 C.F.R. § 258.51(c)(2)]. Monitoring devices that cannot be operated and maintained to perform to design specifications shall be replaced after review and approval of a report (i.e., work plan) for the proposed replacement devices.

21. All borings are to be logged during drilling under the direct supervision of a registered geologist or registered civil engineer with expertise in stratigraphic well logging [Title 27, § 20415(e)(2)].
22. Soils are to be described according to the Unified Soil Classification System [Title 27, § 20415(e)(2)(A)]. Rock is to be described in a manner appropriate for the purpose of the investigation [Title 27, § 20415(e)(2)(B)].
23. The Discharger shall submit a work plan for review and approval at least **60 days** prior to installation or abandonment of groundwater monitoring wells.
24. The Discharger shall provide Central Valley Water Board staff a minimum of **one week** notification prior to commencing any field activities related to the installation or abandonment of monitoring devices.
25. The water quality protection standard shall consist of the constituents of concern (COC), concentration limits, and the point of compliance. The water quality protection standard shall apply during the active life of the waste management unit, closure period, post-closure maintenance period, and any compliance period under Title 27, section 20410 [Title 27, § 20390].
26. The point of compliance at which the water quality protection standard applies is a vertical surface located at the hydraulically downgradient limit of the waste management unit that extends through the uppermost aquifer underlying the unit [Title 27, § 20405].
27. The compliance period is the minimum period of time during which the Discharger shall conduct a water quality monitoring program and is the number of years equal to the active life of the waste management unit plus the closure period [Title 27, § 20410(a)].
28. The groundwater monitoring system shall include a sufficient number of monitoring points, installed at appropriate locations, to yield groundwater samples from the uppermost aquifer that represent the quality of groundwater that has not been affected by a release from the waste management unit [Title 27, § 20415(b)(1)(A)].
29. The Detection Monitoring Program shall include a sufficient number of monitoring points, installed at appropriate locations and depths to yield groundwater samples from the uppermost aquifer that represent the quality of

groundwater passing the point of compliance to allow the detection of a release from the waste management unit [Title 27, § 20415(b)(1)(B)1.].

30. Additional monitoring points shall be added as necessary to provide the best assurance of the **earliest possible detection** of a release from the waste management unit [Title 27, § 20415(b)(1)(B)2.].
31. The Detection Monitoring Program shall also include a sufficient number of monitoring points installed at appropriate depths and locations to yield groundwater samples from other aquifers or perched zones not already monitored to provide the **earliest possible detection** of a release from the waste management unit [Title 27, § 20415(b)(1)(B)3. and 4., and §20420(b)].
32. A surface water monitoring system shall be established to monitor each surface water body that could be affected by a release from the waste management unit [Title 27, § 20415(c)].
33. An unsaturated zone monitoring system shall be established for each waste management unit [Title 27, § 20415(d)].
34. The Discharger shall notify Central Valley Water Board staff within **seven days** if fluid is detected in a previously dry LCRS, unsaturated zone monitoring system, or if a progressive increase is detected in the volume of fluid in a LCRS [Title 27, § 21710(c)(3)].
35. Driller's logs for all monitoring wells shall to be submitted to the Central Valley Water Board and the Department of Water Resources [Wat. Code, § 13751 and Title 27, § 20415(b)(3)].
36. Groundwater elevation, temperature, electrical conductivity, turbidity, and pH are to be accurately measured at each well each time groundwater is sampled [Title 27, § 21415(e)(13)].
37. The groundwater flow rate and direction in the uppermost aquifer and in any zones of perched water and in any additional portions of the zone of saturation being monitored shall be determined at least quarterly [Title 27, § 20415(e)(15)].
38. The Discharger shall graph all analytical data from each monitoring point and background monitoring point and shall submit the graphs to the Central Valley Water Board annually [Title 27, § 20415(e)(14)].
39. For each waste management unit, the Discharger shall collect all data necessary for selecting appropriate data analysis methods for establishing background values for each constituent of concern and for each monitoring parameter [Title 27, § 20420(c)]. The Discharger shall propose a data analysis method that includes a detailed description of the criteria to be used for

determining “measurably significant” (as defined in Title 27, section 20164) evidence of a release from the waste management unit and determining compliance with the water quality protection standard [Title 27, § 20415(e)(6) and (7)].

40. For statistical analysis of data, the Discharger shall use one of the methods described in Title 27, section 20415(e)(8)(A)-(E). A non-statistical data analysis method can be used if the method can achieve the goal of the particular monitoring program at least as well as the most appropriate statistical method [Title 27, § 20415(e)(8)]. The Discharger shall use a statistical or nonstatistical data analysis method that complies with Title 27, section 20415(e)(7, 8, 9, and 10), to compare the concentration of each constituent of concern or monitoring parameter with its respective background concentration to determine whether there has been a measurably significant evidence of a release from the waste management unit. For any given monitoring point at which a given constituent has already exhibited a measurably significant indication of a release at that monitoring point, the Discharger may propose to monitor the constituent, at that well, using a concentration-versus-time plot.
41. The Discharger may propose an alternate statistical method [to the methods listed under Title 27, section 20415(e)(8)(A-D)] in accordance with Title 27, section 20415(e)(8)(E), for review and approval.
42. The statistical method shall account for data below the practical quantitation limit (PQL) with one or more statistical procedures that are protective of human health and the environment. Any PQL validated pursuant to Title 27, section 20415(e)(7) that is used in the statistical method shall be **the lowest concentration (or value) that can be reliably achieved** within limits of precision and accuracy specified in the WDRs or an approved Sample Collection and Analysis Plan for routine laboratory operating conditions that are available to the facility. The Discharger’s technical report (Sample Collection and Analysis Plan and/or Water Quality Protection Standard Report), pursuant to Title 27, section 20415(e)(7), shall consider the PQLs listed in Appendix IX to Chapter 14 of Division 4.5 of Title 22, CCR, for guidance when specifying limits of precision and accuracy. For any given constituent monitored at a background or downgradient monitoring point, an indication that falls between the MDL and the PQL for that constituent (hereinafter called a “trace” detection) shall be identified and used in appropriate statistical or non-statistical tests. Nevertheless, for a statistical method that is compatible with the proportion of censored data (trace and ND indications) in the data set, the Discharger can use the laboratory’s concentration estimates in the trace range (if available) for statistical analysis, in order to increase the statistical power by decreasing the number of “ties”.
43. The water quality protection standard for organic compounds which are not naturally occurring and not detected in background groundwater samples shall

be taken as the detection limit of the analytical method used (e.g., USEPA methods 8260 and 8270).

44. Alternate statistical procedures may be used for determining the significance of analytical results for common laboratory contaminants (i.e., methylene chloride, acetone, diethylhexyl phthalate, and di-n-octyl phthalate) if part of an approved water quality protection standard. Nevertheless, analytical results involving detection of these analytes in any background or downgradient sample shall be reported and flagged for easy reference by Central Valley Water Board staff.
45. **Confirmation of Measurably Significant Evidence of a Release.** Whenever a constituent is detected at a detection monitoring point at a concentration that exceeds the concentration limit from the water quality protection standard, the Discharger shall conduct verification sampling to confirm if the exceedance is due to a release or if it is a false-positive (unless previous monitoring has already confirmed a release for that constituent at that monitoring point). An exceedance of the concentration limit from the water quality protection standard is considered measurably significant evidence of a release that must be either confirmed or denied. There are two separate verification testing procedures:
- a. Standard Monitoring Specification I.46 provides the procedure for analytes that are detected in less than 10% of the background samples such as non-naturally occurring constituents like volatile organic compounds; and
  - b. Standard Monitoring Specification I.47 provides the procedure for analytes that are detected in 10% or greater of the background samples such as naturally occurring constituents like chloride.
46. **Verification Procedure for Analytes Detected in Less than 10% of Background Samples.** The Discharger shall use the following non-statistical method for all analytes that are detected in less than 10% of the background samples. The non-statistical method shall be implemented as follows:
- a. **Initial Determination of Measurably Significant Evidence of a Release.** Identify each analyte in the **current** detection monitoring point sample that exceeds either its respective MDL or PQL, and for which a release has not been previously confirmed. The Discharger shall conclude that the exceedance provides a preliminary indication of a release or a change in the nature or extent of the release, at that monitoring point, if **either**:
    - 1) The data contains two or more analytes that equal or exceed their respective MDLs; or
    - 2) The data contains one or more analyte that equals or exceeds its PQL.

b. **Discrete Retest** [Title 27, § 20415(e)(8)(E) and § 20420(j)(1-3)]:

- 1) In the event that the Discharger or Central Valley Water Board staff concludes (pursuant to paragraph I.46.a., above) that there is a preliminary indication of a release, then the Discharger shall **immediately** notify Central Valley Water Board staff by phone or e-mail and, within **30 days** of such indication, shall collect two new (retest) samples from the monitoring point where the release is preliminarily indicated and analyze them for the constituents that caused the need for the retest.
- 2) **Confirmation of a Release.** As soon as the retest data are available, the Discharger shall conclude that measurably significant evidence of a release is confirmed if (not including the original sample) two or more analytes equal or exceed their respective MDLs or if one or more analyte equals or exceeds its PQL. The Discharger shall then:
  - a) **Immediately** verbally notify the Central Valley Water Board whether or not the retest confirmed measurably significant evidence of a release for the analyte at the monitoring point, and follow up with written notification submitted by certified mail **within seven days** of the verbal notification; and
  - b) Carry out the requirements of Section J, **RESPONSE TO A RELEASE** if a release has been confirmed.
  - c) Add any five-year analyte that is confirmed per this method to the monitoring parameter list such that it is monitored during each regular monitoring event.

47. **Verification Procedure for Analytes Detected in 10% or Greater of the Background Samples.** The Discharger shall use either a statistical or non-statistical method pursuant to Title 27, section 20415(e)(8)(E) for all analytes that are detected in 10% or greater of the background samples. The Discharger shall use one of the statistical methods required in Title 27, section 20415(e)(8)(E) unless another method has been proposed by the Discharger in a Water Quality Protection Standard Report (or equivalent report) and approved by the Central Valley Water Board in a Monitoring and Reporting Program pursuant to Title 27, section 20415(e)(8)(A-D)] or section 20415(e)(8)(E). The method shall be implemented as follows:

- a. **Initial Determination of Measurably Significant Evidence of a Release.** The Discharger shall compare the value reported by the laboratory for each analyte to the statistically-derived concentration limit from the most recent report (Annual Monitoring Report or Water Quality Protection Standard Report) that uses the approved statistical procedure. If the value exceeds the concentration limit for that constituent, the Discharger shall conclude that there is measurably significant evidence of a release [Title 27, § 20420(i)].

b. **Retest Method** [Title 27, § 20415(e)(8)(E) and § 20420(j)(1-3)].

- 1) In the event that the Discharger or Central Valley Water Board staff concludes (pursuant to paragraph I.47.a., above) that there is a preliminary indication of a release, then the Discharger shall **immediately** notify Central Valley Water Board staff by phone or e-mail and, within **30 days** [Title 27, § 20415(e)(3)] of such indication, the Discharger shall implement a verification procedure/retest option, in accordance with Title 27, sections 20415(e)(8)(E) and 20420(j)(2). The verification procedure shall include either a single “composite” retest (i.e., a statistical analysis that augments and reanalyzes the data from the monitoring point that indicated a release) or shall consist of at least two “discrete” retests (i.e., statistical analyses each of which analyzes only newly-acquired data from the monitoring point that indicated a release) [Title 27, § 20415(e)(8)(E)]. The Discharger may use an alternate method previously approved by the Central Valley Water Board and included in the Monitoring and Reporting Program. The verification procedure shall comply with the requirements of Title 27, section 20415(e)(8)(E) in addition to the performance standards of Title 27, section 20415(e)(9). The retest samples shall be collected from the monitoring point where the release is preliminarily indicated and shall be analyzed for the constituents that caused the need for the retest. For any indicated monitoring parameter or constituent of concern, if the retest results of one or more of the retest data suites confirm the original indication, the Discharger shall conclude that measurably significant evidence of a release has been confirmed.
- 2) **Confirmation of a Release.** As soon as the retest data are available, the Discharger shall evaluate the results pursuant to paragraph I.47.b.1, above and shall:
  - a) **Immediately** verbally notify the Central Valley Water Board whether or not the retest confirmed measurably significant evidence of a release for the analyte at the monitoring point, and follow up with written notification submitted by certified mail **within seven days** of the verbal notification; and
  - b) Carry out the requirements of Section J, **RESPONSE TO A RELEASE** if a release has been confirmed.
  - c) Add any five-year analyte that is confirmed per this method to the monitoring parameter list such that it is monitored during each regular monitoring event.

**48. Physical Evidence of a Release.** If the Discharger determines that there is a significant **physical** evidence of a release, the Discharger shall immediately

verbally notify Central Valley Water Board staff and provide written notification **by certified mail within 7 days** of such determination, and within **90 days** shall submit an amended report of waste discharge to establish an Evaluation Monitoring Program [Title 27, § 20385(a)(3) and § 20420(l)(1) & (2)].

## J. RESPONSE TO A RELEASE

1. Measurably Significant Evidence of a Release Has Been Confirmed. If the Discharger has confirmed that there is measurably significant evidence of a release from a waste management unit pursuant to Standard Monitoring Specification I.46 or I.47, then the Discharger shall:
  - a. **Immediately** sample all monitoring points in the affected medium at that waste management unit and determine the concentration of all monitoring parameters and constituents of concern for comparison with established concentration limits. Because this constituent of concern scan does not involve statistical testing, the Discharger will need to collect and analyze only a single water sample from each monitoring point in the affected medium [Title 27, § 20420(k)(1)].
  - b. **Within 14 days** of confirming measurably significant evidence of a release, the Discharger shall (for releases from MSW landfill units) notify all persons who own the land or reside on the land that directly overlies any portion of the plume of contamination if contaminants have migrated off-site if indicated by sampling of detection monitoring wells [40 C.F.R. § 258.55(g)(1)(iii)].
  - c. **Within 90 days** of confirming measurably significant evidence of a release, the Discharger shall submit an amended report of waste discharge to establish an Evaluation Monitoring Program meeting the requirements of Title 27, sections 20420(k)(5)(A-D), including but not limited to the results of sampling pursuant to paragraph J.1.a, above. The Evaluation Monitoring Program shall be designed for the collection and analysis of all data necessary to assess the nature and extent of the release and to determine the spatial distribution and concentration of each constituent throughout the zone affected by the release [Title 27, § 20420(k)(5) and § 20425(b)]. For releases from MSW landfill units, the Evaluation Monitoring Program shall also include any additional proposals necessary to comply with 40 C.F.R. § 258.55, particularly the additional monitoring well required by 40 C.F.R. § 258.55(g)(1)(ii).
  - d. **Within 180 days** of confirming measurably significant evidence of a release, the Discharger shall submit to the Central Valley Water Board an initial engineering feasibility study for a Corrective Action Program necessary to meet the requirements of Title 27, section 20430. At a minimum, the initial engineering feasibility study shall contain a detailed

description of the corrective action measures that could be taken to achieve background concentrations for all constituents of concern [Title 27, § 20420(k)(6)].

- e. If the Discharger confirms that there is measurably significant evidence of a release from the waste management unit at any monitoring point, the Discharger may attempt to demonstrate that a source other than the waste management unit caused the evidence of a release or that the evidence is an artifact caused by an error in sampling, analysis, or statistical evaluation or by natural variation in groundwater, surface water, or the unsaturated zone. The Discharger may make a demonstration pursuant to Title 27, section 20420(k)(7) in addition to or in lieu of submitting both an amended report of waste discharge or an engineering feasibility study; however, the Discharger is not relieved of the requirements and due dates of Title 27, sections 20420(k)(6) & (7) unless Central Valley Water Board staff agree that the demonstration successfully shows that a source other than the waste management unit caused the evidence of a release or that the evidence resulted from error in sampling, analysis, or statistical evaluation or from natural variation in groundwater, surface water, or the unsaturated zone. In order to make this demonstration, the Discharger shall notify the Central Valley Water Board by certified mail of the intent to make the demonstration **within seven days** of determining measurably significant evidence of a release, and shall submit a report **within 90 days** of determining measurably significant evidence of a release [Title 27, § 20420(k)(7)].
- f. **Within 90 days** of the date that the Evaluation Monitoring Program from paragraph J.1.c is approved (the date is it established), the Discharger shall complete and submit the following:
  - i) **Results and Assessment for the Evaluation Monitoring Program.** A report with the results and assessment based on the approved Evaluation Monitoring Program [Title 27, § 20425(b)].
  - ii) **Updated Engineering Feasibility Study.** An updated engineering feasibility study for corrective action based on the data collected to delineate the release and data from the ongoing monitoring program required under Title 27, section 20425(e) [Title 27, § 20425(c)].
  - iii) **Amended ROWD for a Corrective Action Program.** An amended report of waste discharge to establish a Corrective Action Program meeting the requirements of Title 27, section 20430 based on the data collected to delineate the release and based on the updated engineering feasibility study [Title 27, § 20425(d)].

- g. The Discharger shall (for releases from MSW landfill units) discuss the results of the updated engineering feasibility study, prior to the final selection of a remedy, in a public meeting with interested and affected parties [40 C.F.R. § 258.56(d)].

## K. GENERAL PROVISIONS

1. In the event the Discharger does not comply or will be unable to comply with any prohibition or limitation of this Order for any reason, the Discharger shall notify the appropriate Central Valley Water Board office by telephone **as soon as** it or its agents have knowledge of such noncompliance or potential for noncompliance, and shall confirm this notification in writing **within two weeks**. The written notification shall state the nature, time, and cause of noncompliance, and shall describe the measures being taken to prevent recurrences and shall include a timetable for corrective actions.
2. All reports and transmittal letters shall be signed by persons identified below:
  - a. For a corporation: by a principal executive officer of at least the level of senior vice-president.
  - b. For a partnership or sole proprietorship: by a general partner or the proprietor.
  - c. For a municipality, state, federal or other public agency: by either a principal executive officer or ranking elected or appointed official.
  - d. A duly authorized representative of a person designated in a, b or c above if:
    - 1) The authorization is made in writing by a person described in a, b, or c of this provision;
    - 2) The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a Unit, superintendent, or position of equivalent responsibility (a duly authorized representative may thus be either a named individual or any individual occupying a named position); and
    - 3) The written authorization is submitted to the Central Valley Water Board.

- e. Any person signing a document under this Section shall make the following certification:

“I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.”

3. The Discharger shall take all reasonable steps to minimize any adverse impact to the waters of the State resulting from noncompliance with this Order. Such steps shall include accelerated or additional monitoring as necessary to determine the nature, extent, and impact of the noncompliance.
4. The owner of the waste management facility shall have the continuing responsibility to assure protection of waters of the state from discharged wastes and from gases and leachate generated by discharged waste during the active life, closure, and post-closure maintenance period of the waste management units and during subsequent use of the property for other purposes.
5. The fact that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with this Order shall not be regarded as a defense for the Discharger’s violations of this Order.
6. The Discharger shall notify the Central Valley Water Board of a material change in; the types, quantity, or concentrations of wastes discharged; site operations and features; or proposed closure procedures, including changes in cost estimates. This notification shall be given a reasonable time before the changes are made or become effective. No changes shall be made without Central Valley Water Board approval following authorization for closure pursuant to the site Notification of Closure [Title 27, § 21710(a)(4)].
7. The Discharger shall maintain legible records of the volume and type of each waste discharged at each waste management unit or portion of a unit, and the manner and location of discharge. Such records shall be maintained by the Discharger until the beginning of the post-closure maintenance period. These records shall be on forms approved by the State Water Board or Central Valley Water Board and shall be maintained at the waste management facility until the beginning of the post-closure maintenance period. These records shall be available for review by representatives of the State Water Board or Central Valley Water Board at any time during normal business hours. At the beginning of the post-closure maintenance period, copies of these records shall be sent to the Central Valley Water Board [Title 27, § 21720(f)].
8. In the event of any change in landowner or the operator of the waste management facility, the Discharger shall notify the succeeding owner or

operator in writing of the existence of this Order. A copy of that notification shall be sent to the Central Valley Water Board.

9. In the event of any change of ownership or responsibility for construction, operation, closure, or post-closure maintenance of the waste discharge facilities described in this Order, the Discharger shall notify the Central Valley Water Board prior to the effective date of the change and shall include a statement by the new Discharger that construction, operation, closure, or post-closure maintenance will be in compliance with this Order and any revisions thereof [Title 27, § 21710(c)(1)].
10. To assume ownership or operation under this Order, the succeeding owner or operator must apply in writing to the Central Valley Water Board requesting transfer of the Order within **14 days** of assuming ownership or operation of this facility. The request must contain the requesting entity's full legal name, the State of incorporation if a corporation, the name and address and telephone number of the persons responsible for contact with the Central Valley Water Board, and a statement. The statement shall comply with the signatory requirements contained in General Provision K.2 and state that the new owner or operator assumes full responsibility for compliance with this Order. Failure to submit the request shall be considered a discharge without requirements, a violation of the Water Code. Transfer of this Order shall be approved or disapproved by the Central Valley Water Board.

#### **L. STORM WATER PROVISIONS**

1. New and existing Class III landfills shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return period [Title 27, § 20260(c)].
2. New and existing Class II landfills shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return period [Title 27, § 20250(c)].
3. The Discharger shall design storm water conveyance systems for Class III units for a 100-year, 24-hour storm event, and shall design storm water conveyance systems for Class II units for a 1,000-year, 24-hour storm event [Title 27, § 21750(e)(3)].
4. MSW landfills located in a 100-year floodplain shall demonstrate that the landfill unit will not restrict the flow of the 100-year flood, reduce the temporary water storage capacity of the floodplain, or result in washout of solid waste so as to pose a hazard to human health or the environment [40 C.F.R. § 258.11(a)].
5. Waste management units and their respective containment structures shall be designed and constructed to limit, to the greatest extent possible, ponding,

infiltration, inundation, erosion, slope failure, washout, and overtopping under the precipitation conditions for the unit [Title 27, § 20365(a)].

6. Precipitation on landfills or waste piles which is not diverted by covers or drainage control systems shall be collected and managed through the LCRS, which shall be designed and constructed to accommodate the precipitation conditions for each class unit [Title 27, § 20365(b)].
7. Diversion and drainage facilities shall be designed, constructed, and maintained to [Title 27, § 20365(c)]:
  - a. accommodate the anticipated volume of precipitation and peak flows from surface runoff and under the precipitation conditions for the waste management unit:
  - b. effectively divert sheet flow runoff laterally, via the shortest distance, into the drainage and collection facilities;
  - c. prevent surface erosion;
  - d. control and intercept run-on, in order to isolate uncontaminated surface waters from water that might have come into contact with waste;
  - e. take into account:
    - i) for closed waste management units and for closed portions of units, the expected final contours of the closed unit, including its planned drainage pattern;
    - ii) for operating portions of waste management units other than surface impoundments, the unit's drainage pattern at any given time;
    - iii) the possible effects of the waste management unit's drainage pattern on and by the regional watershed;
    - iv) the design capacity of drainage systems of downstream and adjacent properties by providing for the gradual release of retained water downstream in a manner which does not exceed the expected peak flow rate at the point of discharge if there were no waste management facility; and
  - f. preserve the system's function. The Discharger shall periodically remove accumulated sediment from the sedimentation or detention basins as needed to preserve the design capacity of the system.
8. Collection and holding facilities associated with precipitation and drainage control systems shall be emptied immediately following each storm or otherwise managed to maintain the design capacity of the system [Title 27, § 20365(d)].

9. Surface and subsurface drainage from outside of a waste management unit shall be diverted from the unit [Title 27, § 20365(e)].
10. Cover materials shall be graded to divert precipitation from the waste management unit, to prevent ponding of surface water over wastes, and to resist erosion as a result of precipitation [Title 27, § 20365(f)].
11. Any drainage layer in the final cover shall be designed and constructed to intersect with the final drainage system for the waste management unit in a manner promoting free drainage from all portions of the drainage layer [Title 27, §20365(f)].