

**CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION**

11020 Sun Center Drive, #200 Rancho Cordova, California 95670-6114
Phone (916) 464-3291 □ Fax (916) 464-4645
<http://www.waterboards.ca.gov/centralvalley>

TENTATIVE ORDER R5-2026-XXXX

NPDES NO. CAS0085324

**NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT
AND WASTE DISCHARGE REQUIREMENTS
GENERAL PERMIT
FOR**

DISCHARGES FROM MUNICIPAL SEPARATE STORM SEWER SYSTEMS

The following Dischargers are subject to waste discharge requirements as set forth in this Order (as authorized by the Notice of Applicability):

Table 1. Discharger Information

Dischargers	This Order regulates discharges of storm water and authorized non-storm water from municipal separate storm sewer systems (MS4s). Owners or operators of large and medium MS4s are expected to enroll under this Order. Owners or operators of small regulated MS4s currently enrolled under the State Water Resources Control Board's Statewide General Phase II Small MS4 Permit may voluntarily enroll under this Order.
The U.S. Environmental Protection Agency (USEPA) and the Regional Water Quality Control Board have classified the discharge from large and medium MS4s as a major discharge.	

Table 2. Administrative Information

This Order was adopted on:	XX August 2026
This Order shall become effective on:	[100 calendar days from adoption] 2026
This Order shall expire on:	XX August 2031
Those enrollees who are covered under this Order at the time of expiration will continue to be covered until coverage becomes effective under a reissued Order.	

I, PATRICK PULUPA, Executive Officer, do hereby certify that this Order with all attachments is a full, true, and correct copy of the Order adopted by the California Regional Water Quality Control Board, Central Valley Region, on **XX August 2026**.

PATRICK PULUPA, Executive Officer

I. FINDINGS	1
JURISDICTION.....	1
DISCHARGE CHARACTERISTICS AND RUNOFF MANAGEMENT.....	5
WATER QUALITY STANDARDS.....	11
CONSIDERATIONS UNDER FEDERAL AND STATE LAW.....	13
STATE WATER BOARD DECISIONS AND GUIDANCE.....	16
ADMINISTRATIVE FINDINGS.....	18
II. DISCHARGE PROHIBITIONS.....	21
A. STORM WATER DISCHARGE PROHIBITIONS.....	21
B. NON-STORM WATER DISCHARGE PROHIBITIONS.....	21
C. TRASH DISCHARGE PROHIBITION.....	24
D. PYRETHROID PESTICIDES DISCHARGE PROHIBITION.....	24
III. EFFLUENT LIMITATIONS	24
A. TECHNOLOGY BASED EFFLUENT LIMITATIONS.....	24
B. WATER QUALITY BASED EFFLUENT LIMITATIONS AND COMPLIANCE SCHEDULES...	25
IV. RECEIVING WATER LIMITATIONS	26
V. PROVISIONS	27
A. STANDARD PERMIT PROVISIONS AND GENERAL PROVISIONS.....	27
B. APPLICATION REQUIREMENTS.....	27
C. ALTERNATIVE COMPLIANCE PATHWAY.....	30
D. POLLUTANT PRIORITIZATION AND PRESCRIPTIVE APPROACHES.....	33
E. EXISTING PERMITTEES.....	35
F. IMPLEMENTATION OF THE STORM WATER MANAGEMENT FRAMEWORK.....	35
G. REQUIRED DELIVERABLES.....	44
ATTACHMENT A – STORM WATER MANAGEMENT FRAMEWORK.....	A-1
ATTACHMENT B – RELATIONSHIP BETWEEN ORDER R5-2026-0XXX, STORM WATER MANAGEMENT PLAN (SWMP) AND WORK PLAN, AND REPORTS.....	B-1
ATTACHMENT C – ACRONYMS, ABBREVIATIONS, AND DEFINITIONS	C-1
ATTACHMENT D – COVERAGE AREA FOR ORDER R5-2026-0XXX.....	D-1
ATTACHMENT E – MONITORING REQUIREMENTS.....	E-1
ATTACHMENT F – FACT SHEET.....	F-1
F1. PERMIT INFORMATION	F-1
F2. APPLICABLE STATUTES, REGULATIONS, PLANS AND POLICIES	F-9
F3. APPLICATION REQUIREMENTS.....	F-56
F4. RATIONALE FOR DISCHARGE PROHIBITION SPECIFICATIONS.....	F-57
F5. RATIONALE FOR RECEIVING WATER LIMITATIONS	F-64
F6. RATIONALE FOR EFFLUENT LIMITATIONS	F-71
F7. RATIONALE FOR PROVISIONS	F-79
F8. PUBLIC PARTICIPATION.....	F-121

**ATTACHMENT G – SPECIFIC PROVISIONS FOR TOTAL MAXIMUM DAILY LOADS
(TMDLS) APPLICABLE TO ORDER R5-2026-0XXX..... G-1**

G1.	LOWER SAN JOAQUIN RIVER DIAZINON AND CHLORPYRIFOS TMDL.....	G-1
G2.	SACRAMENTO SAN JOAQUIN RIVER DIAZINON AND CHLORPYRIFOS TMDL	G-7
G3.	TMDL FOR DIAZINON AND CHLORPYRIFOS IN THE SACRAMENTO AND FEATHER RIVERS	G-13
G4.	SACRAMENTO COUNTY URBAN CREEKS DIAZINON AND CHLORPYRIFOS TMDL	G-19
G5.	LOWER SAN JOAQUIN RIVER DISSOLVED OXYGEN TMDL	G-25
G6.	SACRAMENTO-SAN JOAQUIN DELTA METHYLMERCURY TMDL	G-29
G7.	CLEAR LAKE NUTRIENTS TMDL.....	G-34
G8.	TMDL FOR PYRETHROID PESTICIDES IN SACRAMENTO AND SAN JOAQUIN RIVER BASIN	G-38
G9.	STOCKTON URBAN WATER BODIES PATHOGEN TMDL	G-48

**ATTACHMENT H – STANDARD PERMIT PROVISIONS AND GENERAL
PROVISIONS..... H-1**

ATTACHMENT I – DETERMINATION OF EROSION POTENTIAL I-1

ATTACHMENT J – POLLUTANT PRIORITIZATION REQUIREMENTS J-1

J.1.	GENERAL RESPONSIBILITIES.....	J-1
J.2.	STORM WATER MANAGEMENT PLAN	J-1
J.3.	PROGRAM MANAGEMENT	J-2
J.4.	PROGRAM ELEMENTS	J-4
J.5.	TREATMENT CONTROL MEASURES	J-8
J.6.	NUMERIC SIZING CRITERIA	J-8
J.7.	INFILTRATION BMPs	J-9
J.8.	MAINTENANCE AGREEMENT AND TRANSFERS.....	J-10
J.9.	LOW IMPACT DEVELOPMENT STRATEGIES.....	J-10
J.10.	HYDROMODIFICATION MANAGEMENT PLAN	J-10
J.11.	TECHNICAL GUIDANCE	J-12
J.12.	MITIGATION FUNDING.....	J-13
J.13.	REGIONAL STORM WATER MITIGATION.....	J-13
J.14.	ALTERNATIVE COMPLIANCE PROGRAM TO ONSITE LID AND HYDROMODIFICATION IMPLEMENTATION.....	J-13
J.15.	ALTERNATIVE COMPLIANCE IN-LIEU FEE STRUCTURE	J-15
J.16.	ALTERNATIVE COMPLIANCE WATER QUALITY CREDIT SYSTEM OPTION	J-15
J.17.	RETROFITTING AND REHABILITATION	J-15
J.18.	COORDINATION, ENFORCEMENT AND TRACKING	J-16
J.19.	PLANNING AND LAND DEVELOPMENT PROGRAM EDUCATION AND TRAINING.....	J-17
J.20.	MONITORING REQUIREMENTS	J-18
J.21.	TRASH IMPLEMENTATION.....	J-24
J.22.	COST REPORTING	J-24
J.23.	ASSET MANAGEMENT.....	J-24

ATTACHMENT K – PRESCRIPTIVE REQUIREMENTS..... K-1

K.1.	PROGRAM MANAGEMENT	K-1
K.2.	PROGRAM ELEMENTS	K-4
K.3.	CONSTRUCTION SITE STORM WATER RUNOFF CONTROL PROGRAM.....	K-10

K.4.	INDUSTRIAL/COMMERCIAL FACILITIES STORM WATER RUNOFF CONTROL PROGRAM	K-15
K.5.	MUNICIPAL OPERATIONS STORM WATER RUNOFF CONTROL PROGRAM	K-20
K.6.	PUBLIC INVOLVEMENT AND PARTICIPATION PROGRAM	K-26
K.7.	PLANNING AND LAND DEVELOPMENT/POST CONSTRUCTION STORM WATER MANAGEMENT PROGRAM	K-29
K.8.	MONITORING REQUIREMENTS	K-41
K.9.	REGIONAL MONITORING PROGRAM	K-45
K.10.	DELTA REGIONAL MONITORING PROGRAM	K-47
K.11.	TRASH IMPLEMENTATION	K-47
K.12.	COST REPORTING	K-48
K.13.	ASSET MANAGEMENT	K-48
ATTACHMENT L – NOTICE OF INTENT		L-1
ATTACHMENT M – NOTICE OF TERMINATION		M-1
ATTACHMENT N – TRASH IMPLEMENTATION		N-1
A.	SELECTION OF COMPLIANCE METHOD:	N-1
B.	MODIFICATION OF COMPLIANCE METHOD	N-2
C.	TRACK 1	N-2
D.	TRACK 2	N-4
E.	TRASH IMPLEMENTATION MODIFICATIONS	N-8
F.	TRASH IMPLEMENTATION SCHEDULE	N-9
ATTACHMENT O – NOTICE OF INTENT TO RE-ENROLL		O-1

I. FINDINGS

The California Regional Water Quality Control Board, Central Valley Region (hereafter, Central Valley Water Board), finds that:

- 1. Storm Water Management Framework.** The Central Valley Water Board adopted a Region-wide Municipal Separate Storm Sewer Systems (MS4) Permit on 23 June 2016 (“Region-wide MS4 Permit”). All Phase I MS4s within the Central Valley region as well as the Phase II portion of the County of San Joaquin are currently enrolled in the Region-wide MS4 Permit, which expired on 30 September 2021 and was administratively extended. In addition, Phase II MS4 Permittees within the Central Valley region are currently covered under the State Water Resources Control Board’s (State Water Board) statewide Phase II MS4 General Order (National Pollution Discharge Elimination System (NPDES) No. CAS000004, *Waste Discharge Requirements for Storm Water Discharges from Small MS4s*, State Water Board Order WQ 2013-0001-DWQ or subsequent renewal or may be enrolled in the current Region-wide MS4 Permit. In order to continue the development of the Permittee’s storm water programs, the Central Valley Water Board is continuing the requirements of the previous permit, which promotes greater watershed/drainage shed coordination, water quality measure protections, and program implementation efficiencies with updates to incorporate new policies and other regulations adopted subsequent to the Region-wide MS4 Permit’s initial adoption in 2016.

This Order continues with a Pollutant Prioritization approach for the Permittee to implement a Storm Water Management Program as described in its Storm Water Management Plan (SWMP). If the Permittee does not succeed in implementation of the Pollutant Prioritization approach (**Part V.D**), this Order requires implementation of a Prescriptive approach which serves as a “backstop”. Details for both approaches are described in **Attachments J and K**, respectively.

- 2. Fact Sheet.** The Fact Sheet for this Order contains background information, regulatory and legal citations, references, and additional explanatory information and data in support of the requirements of this Order. The Fact Sheet in **Attachment F** is hereby incorporated into this Order by reference and constitutes part of the Findings of this Order.

JURISDICTION

- 3. Storm Water and Non-Storm Water Discharges.** Storm water discharges consist of those discharges that originate from precipitation events. Federal regulations define “storm water” as “storm water runoff, snow melt runoff, and surface runoff and drainage” (Title 40 of the Code of Federal Regulations (CFR) section 122.26 (b)(13)). Non-storm water discharges that do not originate from precipitation events are not considered storm water discharges and therefore are not subject to the Maximum Extent Practicable (MEP) standard of CWA section 402(p)(3)(B), which is explicitly for “Municipal...*Storm water Discharges* (emphasis added)” from the MS4s (See 33 U.S.C. § 1342(p)). Pursuant to CWA section 402(p)(3)(B)(ii), non-storm water discharges into the MS4s shall be

effectively prohibited. This prohibition applies unless the discharges are authorized under a separate NPDES permit; the result of emergency firefighting activities; or conditionally exempted under this Order.

4. **MS4 Ownership or Operation.** The Permittee owns or operates a MS4, through which storm water and authorized non-storm water discharge into waters of the United States within the Central Valley region. This Order regulates municipal discharges of storm and non-storm water from the Permittee's MS4. A MS4 is defined under (40 CFR 122.26(b)(8)) and in **Attachment C** (*Acronyms, Abbreviations, and Definitions*).
5. **Legal and Regulatory Authority.** This Order is issued pursuant to CWA section 402 and implementing regulations (40 CFR § 122) adopted by the United States Environmental Protection Agency (USEPA), and chapter 5.5, division 7 of the California Water Code (commencing with section 13370). This Order serves as a NPDES permit for discharges from MS4s to surface waters. This Order also serves as Waste Discharge Requirements (WDRs) pursuant to article 4, chapter 4, division 7 of the California Water Code (commencing with section 13260). The State Water Board and Regional Water Boards administer the NPDES permit program within California pursuant to USEPA authorization granted under 33 United States Code (USC) section 1342.

The Central Valley Water Board has the legal authority to issue MS4 permits pursuant to CWA section 402(p)(3)(B) and 40 CFR 122.26(a)(1)(v). The CWA and implementing regulations allow a permitting authority, in this case the Central Valley Water Board, to establish system- or jurisdiction-wide permits (33 USC 1342(p)(3)(B)(i); (55 Federal Register (FR) 47990, 48039-48042). The nature of this Order will ensure consistency of regulation across the Central Valley region and may result in cost savings for the Permittee and the Central Valley Water Board.

Federal, state, regional, or local entities within the Permittees' boundaries, not currently named in this Order, operate storm drain facilities and/or discharge storm water to the storm drains covered by this Order. The Permittees may lack legal jurisdiction over these entities under applicable state and federal authorities. Consequently, the Central Valley Water Board recognizes that the Permittees should not be held responsible for such facilities and/or discharges. However, Permittees should notify the Central Valley Water Board upon recognition of discharges, which they reasonably believe are a threat to storm water quality protection.

The State and Regional Water Boards may consider issuing separate NPDES storm water permits to other federal, state, or regional entities operating and discharging within the Permittees' boundaries that may not be subject to direct regulation by the Permittees. Federal agencies are not subject to municipal storm water requirements although they may be permitted as industrial dischargers.

The Permittee need only comply with permit conditions relating to discharges from the MS4s for which they are operators (40 CFR 122.26(a)(3)(vi)). This

Order does not require the Permittee to manage storm water outside of their jurisdictional boundaries or authority, but rather to improve storm water management within the Permittee's Jurisdictional Runoff Area. This Order also encourages Permittees to coordinate with each other at regional and/or watershed level scales for greater water quality improvement and efficiency.

There may be runoff or return flows originating from portions of the Permittee's Jurisdictional Runoff Area that are mainly agricultural or rural, and which are beyond the Permittee's legal authority to control (hereinafter "agricultural discharges"). It is not the intent of the storm water program to regulate agricultural discharges. Unless an agricultural discharge constitutes a point source discharge to the Permittee's MS4, this Order requires only that the Permittee demonstrate to the Central Valley Water Board that it has taken measures to seek voluntary cooperation or employ regulatory controls, if available, to control the discharge of pollutants in agricultural discharges.

- 6. Clean Water Act National Pollutant Discharge Elimination System Permit Conditions.** Pursuant to CWA section 402(p)(3)(B), NPDES permits shall (a) include a requirement to effectively prohibit non-storm water discharges into the MS4, and (b) "require controls to reduce the discharge of pollutants to the maximum extent practicable [MEP], including management practices, control techniques and system, design and engineering methods, and such other provisions as the Administrator or the State determines appropriate for the control of such pollutants."

This Order prescribes conditions to assure compliance with the CWA requirements for owners and operators of MS4s to effectively prohibit non-storm water discharges into the MS4s and requires controls to reduce the discharge of pollutants in storm water from MS4s to the MEP. To evaluate the effectiveness of controls, monitoring and reporting requirements are described in **Part V.F** and are hereby incorporated into this Order and constitute part of the Findings of this Order.

- 7. Monitoring and Reporting Requirements.** CWA section 308(a) and 40 CFR sections 122.41(h), (j)-(l) and 122.48 require that NPDES permits shall specify monitoring and reporting requirements. Federal regulations applicable to large and medium MS4s also specify additional monitoring and reporting requirements in 40 CFR sections 122.26(d)(1)(iv)(D), 122.26(d)(1)(v)(B), 122.26(d)(2)(i)(F), 122.26(d)(2)(iii)(D), 122.26(d)(2)(iv)(B)(2), and 122.42(c). Additionally, 40 CFR sections 124.44(i) and 122.48(b) provide monitoring requirements applicable to Phase II MS4s. Water Code sections 13267 and 13383 authorize the Central Valley Water Board to establish monitoring, inspection, entry, reporting and recordkeeping requirements that implement the federal and State laws and/or regulations. This Order establishes monitoring and reporting requirements to implement these and other federal and State requirements.
- 8. Total Maximum Daily Loads.** CWA section 303(d)(1)(A) requires that "[e]ach state shall identify those waters within its boundaries for which the effluent

limitations...are not stringent enough to implement any water quality standard applicable to such waters.” The CWA also requires states to establish a priority ranking of impaired water bodies known as Water Quality Limited Segments and to establish Total Maximum Daily Loads (TMDLs) for such waters. This priority list of impaired water bodies is called the CWA section 303(d) List of Water Quality Limited Segments, commonly referred to as the CWA section 303(d) List. The CWA requires the 303(d) List to be updated every two (2) years.

TMDLs are numerical calculations of the maximum amount of a pollutant that a water body can assimilate and still meet water quality standards. A TMDL is the sum of the allowable loads of a single pollutant from all contributing point sources (waste load allocations (WLAs)) and non-point sources (load allocations), background contribution, plus a margin of safety. Discharges from MS4s are point source discharges. 40 CFR section 122.44(d)(1)(vii)(B) requires that NPDES permits incorporate water quality-based effluent limitations (WQBELs) that are consistent with the assumptions and requirements of any available WLA for the discharge. In the context of MS4 discharges, WQBELs in NPDES permits may be expressed in the form of either numeric limitations or, where authorized by the applicable basin plan, best management practices (BMPs).¹ Requirements of this Order implement the TMDLs adopted by the Central Valley Water Board and approved by USEPA.

For each Permittee, this Order continues to implement the TMDLs addressed by **Attachment G** as WQBELs. Because final compliance deadlines for some of these TMDLs have passed, and the WQBELs in **Attachment G** require the Permittees subject to them to meet WLAs by the final compliance deadline, the WQBELs implementing those TMDLs result in numeric limitations that are more stringent than the requirements in Permittees' previous MS4 permits. The Central Valley Water Board has the authority to adopt a time schedule order for a Permittee where the final compliance deadline for a TMDL has passed. In addition, the Central Valley Water Board has legal authority to adopt a compliance schedule where the final compliance deadline for the TMDL has not yet passed for a Permittee that satisfies the application requirements listed in **Part III.B.3**. This Order allows a Permittee requesting additional time to come into compliance with WQBELs to include a proposed compliance schedule in its SWMP, including a justification satisfying the criteria listed in **Part III.B.3**. Central Valley Water Board approval of a SWMP operates as approval and adoption of any compliance schedule contained therein unless otherwise specified in a Central Valley Water Board approval letter.²

- 9. Enrollment Process.** Permittees currently covered under a Phase II MS4 Permit issued by the State Water Board, or an individual Phase I MS4 Permit issued by the Central Valley Water Board or are enrolled under the Central Valley Water Board Order R5-2016-0040 (NPDES No. CAS0085324) are not immediately

¹ 40 CFR 122.44(k)

² A Permittee may still request a compliance schedule separately from the SWMP process if it so chooses.

covered by this Order. If seeking coverage under this Order Permittees must apply to the Central Valley Water Board for coverage. **Part V.B** of this Order describes the enrollment process. Existing Permittees enrolled under Central Valley Water Board Order R5-2016-0040 (NPDES No. CAS0085324) are covered under that permit until a Notice of Applicability (NOA) is issued for coverage under this Order; or Permit coverage is terminated pursuant to **Part V.B.3** of R5-2016-0040.

This Order distinguishes between New and Existing Permittees in certain provisions. The provisions are tailored to address New and Existing Permittees under the Order, where applicable.

- 10. Storm Water Management Plan.** Pursuant to 40 CFR section 122.26(d)(2)(iv), the Permittee is required to submit a SWMP for Central Valley Water Board approval. The process, including a timeline for submittal, review, and approval, is outlined in **Part V.F** herein. Once approved, the SWMP is incorporated into, and deemed an integral and enforceable component of this Order and shall be implemented during the entire duration of this Order. No revision(s) to the SWMP will be effective until approved by the Central Valley Water Board, or its delegate.

DISCHARGE CHARACTERISTICS AND RUNOFF MANAGEMENT

- 11. Point Source Discharges of Pollutants.** Discharges from the MS4s may contain waste, as defined in the Water Code and pollutants that may adversely affect the quality of the waters of the United States. A MS4 discharge that contains such waste or pollutants is a “discharge of a pollutant” into waters of the United States, as defined in section 502(12) of the CWA. Discharges from the MS4s may contain pollutants that may cause or contribute to exceedances of surface water quality standards, as prescribed in the *Water Quality Control Plan for the Sacramento and San Joaquin River Basins* and the *Water Quality Control Plan for the Tulare Lake Basin* (Basin Plans). Storm water from and non-storm water discharges into the MS4s are subject to the conditions and requirements established in the appropriate Basin Plan as applied through a permit.
- 12. Regulated Sources and Activities.** This Order regulates the discharge of pollutants from anthropogenic sources in runoff from MS4s to Waters of the United States. This Order does not regulate uncontrollable sources. According to the Basin Plan, “controllable water quality factors are those actions, conditions, or circumstances resulting from human activities that may influence the quality of the waters of the State, that are subject to the authority of the State Water Board or the Regional Water Board, and that may be reasonably controlled (Basin Plan at 3-2.). At this time, there is no way to determine the level of uncontrollable sources. This Order is not intended to obligate the Permittees to address background, naturally occurring or non-anthropogenic pollutants or flows in receiving waters.
- 13. Pollutants in Runoff.** Nationally, non-storm water discharges from MS4s has been shown to contribute significant levels of pollutants in urbanized areas and may contribute significantly to exceedances of applicable receiving water quality

standards.³ Within the Central Valley region, numerous receiving water bodies and water body segments have been designated as impaired pursuant to CWA section 303(d).⁴ These determinations indicate that non-storm water discharges are one of the sources causing or contributing to water quality impairment. The CWA section 303(d) lists primary pollutants of concern that may be attributed to urban runoff include low dissolved oxygen, pathogens, salinity, pesticides, copper, iron, lead, mercury, zinc, polychlorinated biphenyls (PCBs), and toxicity levels.

These impairments are consistent with water quality data collected by Central Valley region Permittees to date and other study results⁵, which indicate the most common pollutants in runoff discharged from the MS4s include total suspended solids, sediment, pathogens (e.g., bacteria, viruses, protozoa), heavy metals (e.g., copper, lead, and zinc), petroleum products and polynuclear aromatic hydrocarbons (PAHs), synthetic organics (e.g., pesticides, herbicides, and PCBs), nutrients (e.g., nitrogen and phosphorus), oxygen-demanding substances (e.g., decaying vegetation, green waste, animal waste), detergents, and litter/trash. As operators of the MS4s, Permittees may not passively receive and discharge pollutants from third parties that may cause or contribute to exceedances of water quality standards. The implementation of the measures set forth in this Order is intended to reduce the entry of pollutants into MS4s thereby reducing their discharge into receiving waters to the MEP.

14. Human Health and Aquatic Life Impairment. Pollutants in runoff discharged from the MS4s can threaten and adversely affect human health and aquatic organisms. Adverse responses of organisms to chemicals or physical agents in runoff range from physiological responses, such as impaired reproduction or growth anomalies, to mortality. Increased volume, velocity, rate, and duration of storm water runoff can greatly accelerate the erosion of downstream natural

³ (1) *Results of the Nationwide Urban Runoff Program*, Volumes I and II, United States Environmental Protection Agency, Washington, D.C., December 1983; (2) *Preliminary Data Summary of Urban Storm Water Best Management Practices*, United States Environmental Protection Agency, Washington, D.C., EPA-821-R-09-012, August 1999; (3) State Water Resources Control Board's 2010 (or most recently approved) Clean Water Act section 303(d) List and section 305(b) report.; (4) *Urban Stormwater Management in the United States, Committee on Reducing Stormwater Discharge Contributions in Water Pollution*, Water Science and Technology Board, Division on Earth and Life Sciences, National Research Council of The National Academies, 2008; and (5) *Pathogens in Urban Stormwater Systems*, Urban Water Resources Research Council, August 2014.

⁴ [2020-2022 CWA section 303\(d\) list](https://waterboards.ca.gov/water_issues/programs/water_quality_assessment/2020_2022_integrated_report.html), (https://waterboards.ca.gov/water_issues/programs/water_quality_assessment/2020_2022_integrated_report.html).

⁵ *Urban Runoff Discharges from Sacramento, California*, 1984-1985, Report Number 87-1SPSS, Central Valley Water Board, 1987.

channels. When individually or cumulatively significant, such increases alter stream channels and habitats and can adversely affect aquatic and terrestrial organisms.

15. Pollutants Resulting from Land Development. New land development and redevelopment fulfill the needs of a growing population. However, the resulting changes in landscape and the human activities occurring thereon often create new sources of non-storm water discharges and/or increased sources of pollutants in storm water discharges. For example, increased human activity within newly developed and redeveloped areas may result in higher levels of car emissions, car maintenance waste, municipal sewage, pesticides, household hazardous wastes, pet wastes, and litter/trash. When new development and redevelopment convert natural vegetated pervious ground cover to impervious surfaces, such as paved highways, streets, rooftops, and parking lots, without mechanisms to offset impacts of added impervious surfaces, the natural absorption and infiltration abilities of the land are decreased or lost. Therefore, runoff leaving a developed area without mitigation in the form of low impact development (LID), treatment controls, and/or hydromodification BMPs may contain greater pollutant loads and have significantly greater runoff volume, velocity, and peak flow rate compared to pre-project runoff from the same area.

16. Low Impact Development Standards. Low impact development refers to a storm water management strategy designed to reduce storm water runoff by enhancing infiltration and/or retaining runoff at its point of origin. New development and significant redevelopment often increase the impervious surfaces within a watershed, increasing peak flow rate and volume, and pollution levels in storm water runoff at a specific site. With the implementation of site-specific LID measures, interference with natural watershed functions resulting from urbanization can be minimized or eliminated, and opportunities for groundwater recharge and improving surface water quality can be maximized. LID encompasses a variety of site planning, source control and storm water treatment measures which eliminate or minimize runoff impacts to adjacent surface waters and which can even reduce overall project costs and benefit communities environmentally.⁶ Low impact development strategies include, but are not limited to, source control, the use of pervious pavements and green roofs, routing runoff to landscape, biofiltration/bioretenion cells or rain gardens, amending soils, and preserving on-site native vegetation, storm water basins, and natural drainage flowpaths in project design plans.

17. Hydromodification Standards. As used in this Order, “hydromodification” refers to ecologically significant changes to a stream or river channel’s hydrology that

⁶ *Reducing Stormwater Costs through Low Impact Development (LID) Strategies and Practices*, United States Environmental Protection Agency, Washington D.C., EPA 841-F-07-006, December 2007.

stem from altered runoff patterns associated with land use development.⁷ When altered runoff patterns occur, storm water runoff with increased volume, velocity, rate, duration, and overall energy (collectively “flow”) reaches adjacent streams or rivers impacting channel hydrology. These changes in flow have the potential to increase the discharge of pollutants into waters of the United States in at least two ways. First, significantly increasing the flow of storm water runoff has been associated with increased sedimentation of receiving waters, whether such sediment originates from lands surrounding the receiving water or from the bed/bank of the receiving water itself. Second, the sediment roiled by increased storm water flows facilitates the transport, and ultimate deposition into the waters of the United States, of other pollutants that absorb or adsorb to sediment. Such eroded sediment and/or sediment-bound pollutants may have potential adverse impacts to water quality, sensitive habitat, and/or aquatic or terrestrial organisms. Significant changes to the pre-development hydrograph can also disrupt natural drainage patterns in ways that cause significant increases in water temperatures in stream segments. These and similar changes can set off further water quality impacts such as excessive nutrient loads and corresponding drops in dissolved oxygen. These potential impacts form an illustrative, but not exhaustive, list of the ways that hydromodification can cause or contribute to the discharge of pollutants into waters of the United States. Properly designed, installed, and maintained LID measures are a primary method to address the causes of hydromodification.

18. Best Management Practice Implementation. Pollutants deposited and accumulated in MS4 drainage structures will likely be discharged to waters of the United States unless treated or removed. These discharges may cause or contribute to exceedances of water quality standards in receiving waters. For this reason, pollutants in storm water discharges from the MS4s shall be reduced to the MEP by the application of a feasible combination of pollution prevention, source control, and/or treatment control best management practices (BMPs). Pollution prevention is the reduction or elimination of pollutant generation at its source. Properly implemented, source control BMPs (both structural and non-structural) minimize the contact between pollutants and runoff, thereby reducing or eliminating pollutant discharges into the MS4. Treatment control BMPs can be effective in removing pollutants that have been mobilized by storm water or non-storm water flows.

19. Proper Operation and Maintenance. Proper operation and maintenance of all facilities and systems of treatment and control (and related appurtenances) installed or used by the Permittee to achieve compliance with the conditions of

⁷ *Hydromodification Assessment and Management in California*, Southern California Coastal Water Research Project, Technical Report 667, April 2012, and *Hydromodification, A Fact Sheet from the Southern California Coastal Water Research Project*, March 2013.

the Order is required. The Order requires Permittees to effectively manage their storm water facilities to assist in achieving the pollutant load reduction strategy.

20. Asset Management. This Order may be amended, or a separate Order may be issued should the State Water Resources Control Board require implementation of asset management in municipal storm water permits.

21. Advancing Measures to Mitigate and Adapt to Climate Change. Climate change is a term that has been used to refer to observed regional changes in weather patterns that may occur such as temperature, precipitation and storms. At the local scale, climate change may directly impact groundwater and surface water supply, shifting drainage, flooding and erosion patterns within urbanized areas. This shift, combined with California's growing population has increased reliance on pumping, conveying, treating, and heating water, activities associated primarily with the majority of greenhouse gas emissions due to electricity and natural gas consumption for the water sector.⁸

As an adaptive climate change strategy to reduce water sector emissions, in some locations storm water runoff can be captured, infiltrated, and used to mitigate periodic drought conditions, reduce flood hazards and erosion rates, and recharge depleted groundwater aquifers and other water supply sources, all while reducing pollutant loads and maintaining beneficial uses in receiving waters.⁹¹⁰ Implementation of this storm water use strategy has multiple benefits and may contribute to balancing local water budgets, creating drought buffer reserves, restoring habitat and watershed health, sustaining municipal storm water infrastructure, and protecting public health, safety, and property.

The State Water Board's Resolution No. 2017-0012: "Comprehensive Response to Climate Change," requires a proactive approach to climate change in all California Water Board actions, with the intent to embed climate change consideration into all programs and activities. The Central Valley Water Board adopted Resolution R5-2017-0116, which affirms the approach. Aligning with Resolution No. 2017-0012, this Order promotes storm water capture and use projects to provide flood protection, augment local water supply, and increase

⁸ *First Update to the Climate Change Scoping Plan, Building on a Framework Pursuant to AB 32, The California Global Warming Solution Act of 2006*, California Air Resources Board, May 2014, p. 62.

⁹ Storm Water Strategy Initiative Concept Paper, State Water Resources Control Board, 16 May 2014.

¹⁰ *Climate Change and Water Supply Security: Reconfiguring Groundwater Management to Reduce Drought Vulnerability*, A White Paper from the California Energy Commission's California Climate Change Center, prepared by the University of California, Santa Cruz, for the California Energy Commission, CEC-500-2012-017, July 2012.

water supply reliability as a climate adaptation strategy, in addition to water quality benefits and enhanced aquatic habitats.

In addition, Executive Order N-10-19, signed on 29 April 2019, directs the California Natural Resources Agency, the California Environmental Protection Agency, and the California Department of Food and Agriculture to prepare a Water Resilience Portfolio that meets the needs of California's communities, economy, and environment, and expand and/or reassess the priorities in the California Water Action Plan. The Executive Order directs agencies to prioritize multi-benefit approaches, natural infrastructure, innovation and new technologies, regional approaches, integration across state government, and partnerships across governments.

22. California's Water Supply Strategy. In August 2022, as part of the Water Resilience Portfolio, the California Natural Resources Agency, the California Environmental Protection Agency, and the California Department of Food and Agriculture issued the Water Supply Strategy in which new water would be available for use by capturing storm water and reducing annual water demand through water conservation.

This Order promotes storm water capture and reuse to augment local water supply and increase water supply reliability as a climate adaptation strategy, in addition to water quality benefits and enhanced aquatic habitats and water conservation.

23. Strategy to Optimize Resource Management of Stormwater (Stormwater Strategy, STORMS). State Water Resources Control Board Resolution No. 2009-0011 (Policy for Water Quality Control for Recycled Water) identified the goal of California to increase the use of storm water over use in 2007 by at least 500,000 acre-ft/year by 2020, and by at least one million acre-ft/year by 2030.

In January 2016, the State Water Resources Control Board adopted a Strategy to Optimize Resource Management of Stormwater that identifies goals, objectives, and actions needed for the State Water Resources Control Board and nine Regional Water Quality Control Boards to improve the regulation, management, and utilization of California's storm water resources. The intent of the Storm Water Strategy is to establish the value of storm water as a resource in California and encourage its application to beneficial uses. In February 2019, the State Water Board published storm water targets for capture and direct use of storm water.

This Order identifies storm water as a resource and promotes storm water capture and reuse to provide water quality benefits and enhance aquatic habitats and water conservation.

24. Long-Term Planning and Implementation. Federal regulations require MS4 permits to expire five (5) years from adoption, after which the permit shall be administratively extended if not renewed and reissued. The Central Valley Water Board recognizes that the degradation of water quality and impacts to beneficial

uses of the waters in the Central Valley region for the most part has occurred over several decades. The Central Valley Water Board further recognizes that, with respect to certain water quality constituents, a decade or more may be necessary to realize demonstrable improvement to the quality of waters in the Central Valley region. This Order includes a long-term planning, implementation, and adaptive management approach that may require more than a single permit term to complete. This permit is intended to develop, achieve, and implement a timely, comprehensive, cost-effective storm water pollution control program. Permittees will have the flexibility to prioritize and address the priority water quality constituents of concern in MS4 storm water to the MEP from the permitted areas subject to this Order and maintain or attain compliance with water quality standards over time.

WATER QUALITY STANDARDS

25. Water Quality Control Plans. The Central Valley Water Board has adopted the *Water Quality Control Plan for the Sacramento and the San Joaquin River Basins*, Fifth Edition (Revised February 2019) and *Water Quality Control Plan for the Tulare Lake Basin*, Third Edition (Revised May 2018) (Basin Plans). Each basin plan designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for all waters addressed through the plan.

Each Basin Plan may identify the following existing and potential beneficial uses¹¹ for surface waters in the Central Valley region: Municipal and Domestic Supply (MUN), Agricultural Supply (AGR), Industrial Service Supply (IND), Industrial Process Supply (PRO), Ground Water Recharge (GWR), Freshwater Replenishment (FRSH), Navigation (NAV), Hydropower Generation (POW), Contact Water Recreation (REC-1), Non-contact Water Recreation (REC-2), Commercial and Sport Fishing (COMM), Aquaculture (AQUA), Warm Freshwater Habitat (WARM), Cold Freshwater Habitat (COLD), Estuarine Habitat (EST), Wildlife Habitat (WILD), Preservation of Biological Habitats of Special Significance (BIOL), Rare, Threatened, or Endangered Species (RARE), and Migration of Aquatic Organisms (MIGR), Spawning, Reproduction, and/or Early Development (SPWN), and Shellfish Harvesting (SHELL).

The State Water Board has adopted the *Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary* (Revised December 2018) (Bay-Delta Plan). The Bay-Delta Plan establishes water quality objectives for which implementation can be fully accomplished only if the State Water Board assigns some measure of responsibility to water right holders and water users to mitigate for the effects on the designated beneficial uses of their diversions and use of water. Like all water quality control plans, the Bay-Delta Plan consists of:

¹¹ The EST and SHELL surface water beneficial uses are only in the *Water Quality Control Plan for the Sacramento-San Joaquin River Basins*. The beneficial uses for AQUA (surface water) are only in the *Water Quality Control Plan for the Tulare Lake Basin*.

(1) beneficial uses to be protected; (2) water quality objectives for the reasonable protection of beneficial uses; and (3) a program of implementation for achieving the water quality objectives. Together, such beneficial uses and water quality objectives constitute water quality standards under the CWA, and the program of implementation includes the State's anti-degradation policy. As a planning document, the Bay-Delta Plan prioritizes water quality control planning activities to include 1) Pelagic Organism Decline; 2) climate change; 3) Delta and Central Valley Salinity; and 4) San Joaquin River flows.

26. Central Valley Salinity Alternatives for Long-Term Sustainability (CV-SALTS). On 17 January 2020, certain Basin Plan Amendments to incorporate new strategies for addressing ongoing salt and nitrate accumulation in the Central Valley became effective. Other provisions subject to U.S. EPA approval became effective on 2 November 2020, when approved by U.S. EPA. MS4 Permittees were presumed to be in compliance with the Conservative Pathway for the Salt Control Program and their MS4 discharges are able to comply with the Basin Plan water quality objectives of 700 $\mu\text{mhos/cm}$ (monthly average) AGR, 900 $\mu\text{mhos/cm}$ (annual average) MUN, and 1,550 $\mu\text{mhos/cm}$ (monthly average) for the Lower San Joaquin River. Therefore, no reasonable potential is presumed for these constituents and no effluent limits or specific BMPs are required in this Order.

27. National Toxics Rule and California Toxics Rule. USEPA adopted the National Toxics Rule (NTR) on 22 December 1992 and later amended it on 4 May 1995 and 9 November 1999. About forty criteria in the NTR applied in California. On 18 May 2000, USEPA adopted the California Toxics Rule (CTR). The CTR promulgated new toxics criteria for California and, in addition, incorporated the previously adopted NTR criteria that were applicable in the state. The CTR was amended on 13 February 2001. The requirements of this Order are consistent with the NTR and CTR.

28. Domestic Water Quality. In compliance with Water Code section 106.3, it is the policy of the State of California that every human being has the right to safe, clean, affordable, and accessible water adequate for human consumption, cooking, and sanitary purposes. This Order promotes that policy by requiring receiving waters to meet adopted water quality standards that are designed to protect human health and ensure that water is safe for domestic use.

29. Antidegradation Policy. This Order complies with the federal Antidegradation Policy described in 40 CFR 131.12, and State Water Resources Control Board (State Water Board) Resolution No. 68-16, *Statement of Policy with Respect to Maintaining High Quality Waters in California*. Federal regulations at 40 CFR 131.12 require that the State develop and adopt a statewide antidegradation policy consistent with the federal policy. In 1968, before the CWA was adopted, the State Water Board established California's antidegradation policy in State Water Board Resolution No. 68-16. Nevertheless, State Water Board Resolution No. 68-16 is consistent with the federal Antidegradation requirements. State Water Board Resolution No. 68-16 requires that existing quality of waters be

maintained unless degradation is justified based on findings specified in that resolution. Each Basin Plan implements, and incorporates by reference, both the State and federal antidegradation policies.

30. Anti-Backsliding Requirements. Section 402(o)(2) of the CWA prohibits backsliding in NPDES permits. Where the requirement applies, a permit's effluent limitations must be at least as stringent as those in the previous permit. This statutory prohibition against backsliding applies in a narrow set of circumstances, none of which apply to the effluent limitations in this Order.¹² Although the State Water Board has acknowledged that it is unclear whether the regulatory prohibition on backsliding in 40 CFR section 122.44(l) applies more broadly to include non-numeric requirements such as BMPs and plans, this Order would satisfy anti-backsliding even if the regulatory requirement did apply. All effluent limitations in this Order are at least as stringent as the effluent limitations in the Permittee's previous permits. Implementation of this Order will result in water quality protection equal or better than protection afforded by previous permits.

CONSIDERATIONS UNDER FEDERAL AND STATE LAW

31. Endangered Species Acts. This Order does not authorize any act that results in the taking of a threatened or endangered species or any act that is now prohibited, or becomes prohibited in the future, under either the California Endangered Species Act (CESA, Fish and Game Code sections 2050 to 2097) or the federal Endangered Species Act (FESA, 16 USC sections 1531 to 1544). The requirements of this Order are designed to maintain water quality and prevent a condition of pollution, contamination or nuisance in waters of the United States. The Permittee remains independently responsible for meeting all applicable requirements under CESA and FESA.

32. Water Code Section 13241. Water Code section 13241 requires the Central Valley Water Board to consider certain factors when establishing water quality objectives, including:

- a. Past, present, and probable future beneficial uses of water.
- b. Environmental characteristics of the hydrographic unit under consideration include the quality of water available thereto.
- c. Water quality conditions that could reasonably be achieved through the coordinated control of all factors which affect water quality in the area.
- d. Economic considerations.
- e. The need for developing housing within the region.
- f. The need to develop and use recycled water.

The Central Valley Water Board is not establishing water quality objectives in this Order. However, Water Code section 13263(a) requires the Central Valley Water

¹² See State Water Board Order WQ 2015-075, at p. 19 (June 16, 2015).

Board to take into consideration the provisions of California Water Code section 13241 in prescribing waste discharge requirements, when such requirements are more stringent than what federal law requires.

33. Economic Considerations. When pollutant controls in an NPDES permit are more stringent than federal law requires, Water Code section 13263 requires that the Water Boards consider the factors described in Water Code section 13241 as they apply to those specific restrictions. However, the California Supreme Court has ruled that even though Water Code section 13263 requires the State and Regional Water Boards to consider factors set forth in Water Code section 13241 when issuing a NPDES permit, the Water Boards may not consider those factors to justify imposing pollutant restrictions that are less stringent than the applicable federal regulations require. (*City of Burbank v. State Water Resources Control Bd.* (2005) 35 Cal.4th 613, 618, 626-627.)

The Central Valley Water Board finds that the requirements in this permit are not more stringent than the minimum federal requirements. The requirements of this Order all implement the effective prohibition on the discharge of non-storm water into the MS4, controls to reduce the discharge of pollutants in storm water to the MEP, or other provisions that the Central Valley Water Board has determined appropriate to control such pollutants. (See 33 USC section 1342(p)(3)(B)(iii).) All such requirements are mandated by federal law under section 402 of the CWA. Therefore, a Water Code section 13241 analysis is not required.

Even though consideration of Water Code section 13241 factors is not required for issuance of this Order, the Central Valley Water Board has considered cost information in issuing this Order. The Central Valley Water Board has also considered all the evidence that has been presented to the Central Valley Water Board regarding the California Water Code section 13241 factors in adopting this Order. The Central Valley Water Board finds that the requirements in this Order are reasonably necessary to protect beneficial uses identified in the Basin Plan and the economic information related to costs of compliance and other Water Code section 13241 factors are not sufficient to justify failing to protect those beneficial uses and that failure to protect the beneficial uses would be inconsistent with the requirements of federal law. Where appropriate, the Central Valley Water Board will consider providing the Permittees with additional time to implement control measures to achieve final water quality-based effluent limitations and/or water quality standards.

34. Unfunded Mandates. No provision of this Order constitutes an unfunded local government mandate subject to subvention under Article XIIIB, Section (6)(a) of the California Constitution. Article XIIIB, Section (6)(a) provides that whenever “any state agency mandates a new program or higher level of service on any local government, the state shall provide a subvention of funds to reimburse that local government for the costs of the program or increased level of service.” The requirements of this Order do not constitute state mandates that are subject to a subvention of funds for the reasons described in **Attachment F (Fact Sheet)**.

- 35. California Environmental Quality Act.** The issuance of waste discharge requirements and NPDES permit coverage for the discharge of runoff from MS4s to waters of the United States is exempt from the requirement for preparation of environmental documents under the California Environmental Quality Act (CEQA) (Public Resources Code (PRC), Division 13, Chapter 3, section 21000 *et seq.*) in accordance with Water Code section 13389.
- 36. BMPs in Lieu of Numeric Effluent Limits.** The Clean Water Act does not require the Central Valley Water Board to establish numeric effluent limits for pollutants in storm water discharges from MS4s (CWA section 402(p)(3)(B)(iii)¹³, 40 CFR § 122.44(k)). Accordingly, with the exception of certain WQBELs based on applicable TMDLs, this Order does not contain numeric effluent limits and instead includes requirements to reduce pollutants in storm water discharges to the MEP and other provisions, including receiving water limitations, to promote attainment of water quality standards over time. This Order requires the implementation of BMPs identified in the Permittee's SWMP to control and abate the discharge of pollutants in storm water discharges. Compliance with the requirements of this Order and implementation of the Permittee's SWMP and Work Plan in accordance with the corresponding schedules constitutes compliance with the MEP standard.
- 37. Human Right to Water Law.** This Order is consistent with Water Code section 106.3, which establishes the policy of the State of California that every human being has the right to safe, clean, affordable, and accessible water adequate for human consumption, cooking, and sanitary purposes. Central Valley Water Board Resolution R5-2016-0018 affirms the policy. This Order promotes that policy by requiring receiving waters to meet adopted water quality standards that are designed to protect human health and ensure that water is safe for domestic use and by regulating discharges to minimize loading to attain the highest water quality which is reasonable, considering all demands being made on those waters the total values involved (Wat. Code §§ 13000, 13050, subdivisions (i)-(m), 13240, 13241, 13263; State Water Board Resolution No. 68-16). This Order includes actions to improve conditions for socio-economically disadvantaged communities. The public process to consider this Order adoption provided opportunities for stakeholders, including disadvantaged communities, to provide meaningful input on the Order requirements that affect their communities.
- 38. Environmental Justice.** Pursuant to Water Code section 13149.2, the Central Valley Water Board has taken into account environmental justice, tribal impact, and racial equity considerations in issuing this Order. The discharges regulated by this Order may occur in one or more disadvantaged communities or tribal communities. This Order addresses potential adverse impacts to water quality by limiting the types of waste that may be discharged and requiring procedures to

¹³ CWA section 402(p)(3)(B)(iii) states, in part, "...controls to reduce pollutants to the maximum extent practicable, including management practices, control techniques, and system, design and engineering methods, and such other provisions as the Administrator or the State determines appropriate for the control of such pollutants."

prevent the disposal of any pollutants that are prohibited by this Order or that may cause pollution of water resources.

STATE WATER BOARD DECISIONS AND GUIDANCE

39. Compliance with Receiving Water Limitations. The provisions of this Order regarding receiving water limitations and the alternative compliance approach are consistent with language established in State Water Board Order WQ 99-05, State Water Board Order WQ 2015-075 as amended by Order WQ 2021-0052-EXEC, as well as State Water Board Order WQ 2020-0038. In State Water Board Order WQ 2020-0038, the State Water Board applied and further explained the alternative compliance pathway principles in Order WQ 2015-0075. State Water Board Order WQ 2015-0075 affirmed that MS4 permits shall, consistent with Order WQ 99-05, require that discharges from the MS4s not cause or contribute to exceedances of water quality standards, that compliance with these receiving water limitations may be achieved through an iterative process, but that good faith engagement in the iterative process does not constitute compliance with the receiving water limitations. However, Order WQ 2015-0075 also directed that the Order should include a rigorous and transparent alternative compliance pathway that encourages watershed-based approaches and multi-benefit projects through which the MS4 may be deemed in compliance with the receiving water limitations and other water quality-based effluent limitations. Consistent with State Water Board precedent, the receiving water limitations in this Order provide that storm water discharges from MS4s shall not cause or contribute to exceedances of water quality standards. However, inclusion of the alternative compliance approach is necessary to ensure that Permittees effectively marshal their resources in order to make continual progress toward attainment of applicable water quality standards, while being deemed in compliance with receiving water limitations and/or water quality-based effluent limitations. Given the size of the Central Valley region, watershed-based programs will be based on urban geographic areas.

40. Maximum Extent Practicable. This Order specifies requirements necessary for the Permittees to reduce the discharge of pollutants in urban runoff to the MEP. MEP is a technology-based standard established by Congress in CWA section 402(p)(3)(B)(iii) that operators of MS4s shall meet. MEP is a dynamic performance standard that evolves over time. As urban runoff management knowledge increases, meeting the MEP standard requires the Permittee's Storm Water Management Program to be continually assessed and modified to incorporate improved programs, water quality control measures, BMPs, and other program components to address the pollutants of concern. Factors that shall be considered when defining MEP include, but are not limited to: effectiveness, regulatory compliance, public acceptance, cost, and technical feasibility. This continual assessment, revision, and improvement of the Storm Water Management Program implementation are expected to ultimately achieve compliance with water quality standards.

41. Statewide Trash Amendments. On 7 April 2015, the State Water Board adopted an Amendment to the Water Quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries that added “Final Part 1 Trash Provisions” (the “Trash Provisions”). The Central Valley Water Board is required to implement the new Trash Provisions through NPDES permits issued pursuant to Federal Clean Water Act section 402(p), including MS4 permits. The water quality objective established by the Trash Provisions serves as a water quality standard federally mandated under Clean Water Action Section 303(c) and the federal regulations (33 United States Code section 1312, 40 Code of Federal Regulations section 131). This water quality standard was specifically approved by USEPA on 12 January 2016 following adoption by the State Water Board and approval by the Office of Administrative Law on 2 December 2015. Further, the water quality standard expected to be achieved pursuant to the Trash Provisions may allow each waterbody subsequently determined to be impaired by trash to not be placed on the Clean Water Action section 303(d) list, obviating the need for the development of a TMDL for trash for each of those waterbodies (33 United States Code section 1313(c); 40 Code of Federal Regulations section 130.7). The specific actions proposed by permittees substitute for some or all of the actions that would otherwise be required consistent with a wasteload allocation in a trash TMDL (40 Code of Federal Regulations section 122.44, subdivision(d)(1)(vii)(B)).

This Order includes provisions for Permittees with regulatory authority over priority land uses, designated land uses, and/or equivalent alternate land uses to implement requirements of the Trash Amendments, including progress timelines for implementation of full trash capture systems or equivalent, and to comply by 2 December 2030, or as amended by the State Water Board.

42. Standardized Cost Reporting. In 2019, the California State Auditor (CSA) recommended that the State Water Board develop statewide guidance on methods for tracking the cost of stormwater program management for MS4 Permittees to ensure that the regional water boards obtain adequate and consistent information on the stormwater program management costs. In addition, the CSA recommended that the State Water Board adopt regulations necessary to ensure that the regional water boards and MS4 Permittees follow its guidance regarding adequate and consistent information about MS4 Permittees’ stormwater program management costs.

40 CFR sections 122.26(d)(1)(vi)(A) and 122.26(d)(2)(vi) of the federal storm water regulations require Phase I MS4 Permittees to provide a fiscal analysis of the capital and operation and maintenance expenditures necessary to accomplish the activities outlined in their Phase I MS4 Permits. Water Code section 13383 authorizes the Water Boards to establish additional reporting requirements for Phase I or Phase II MS4 Permittees.

The State Water Board adopted the Policy for Standardization of Cost Reporting in Municipal Stormwater Permits on 22 January 2025.

This Order includes requirements to implement cost reporting and cost accounting, and to submit an annual cost report.

- 43. Stormwater Resource Planning, Senate Bill 985.** The Stormwater Resource Planning Act, Water Code sections 10560 – 10565, authorizes the Permittee to develop a Stormwater Resource Plan to list, prioritize, and implement multi-benefit projects geared towards capturing storm water and dry weather runoff. The Permittees are now required to have a Stormwater Resource Plan as a condition of receiving funding for storm water and dry weather runoff capture projects from any approved bond measure. This Order encourages the Permittees to develop Storm Water Management Programs that promote the use of storm water as a resource.

ADMINISTRATIVE FINDINGS

- 44.** As required by federal law, this General Order must be renewed within five years. Initial coverage under this Order requires the submission of a Notice of Intent as described under **Part V.B.1**. Permittees under Order R5-2016-0040 seeking to continue their coverage under this Order are required to submit a Notice of Intent to Re-Enroll and the Annual Report for fiscal year 2025-2026 as described in **Part V.B.2** unless the Permittee requests a termination of coverage.
- 45. NPDES Electronic Reporting Rule (eRule).** 40 Code of Federal regulations part 127 requires NPDES permittees to electronically report information and also requires authorized states implemented the NPDES program to ensure that the required minimum set of data in part 127, Appendix A, is electronically transferred to USEPA in a “timely, accurate, complete, and nationally consistent manner fully compatible with USEPA’s national NPDES data system.” The rule does not add new reporting requirements on NPDES regulated entities; rather it substitutes electronic transmission for paper-based filings. The State’s existing electronic reporting system for storm water discharges (Stormwater Multiple Application and Report Tracking System (SMARTS)), which is compliant with USEPA’s Cross-media Electronic Reporting Rule (40 Code of Federal Regulations part 3), does not currently accommodate the collection from MS4 dischargers and reporting to USEPA of all applicable Appendix A data in a “nationally consistent manner fully compatible with USEPA’s national NPDES data system.” Electronic reporting requirements for those data will be implemented when the State develops an approved system. On 30 April 2019, USEPA proposed changes to the NPDES eRule, in Appendix A, to update data elements applicable to regulated MS4s to be consistent with existing MS4 regulations. On 28 February 2020, USEPA proposed the “Phase 2 Extension Rule”, extending the 21 December 2020 deadline to 21 December 2025 for electronic submittal of annual reports.¹⁴ USEPA extended the electronic submittal of Annual Report deadline to 21 December 2028.

¹⁴ 80 Federal Register pp. 64064-64158; 84 Federal Register pp. 18200-182-5; 85 Federal Register pp. 11909-11927.

The State Water Board is in the process of developing the reporting system for Phase I MS4s required by the eRule. Once the reporting system is developed by the State Water Board, the Permittees will be notified by the Central Valley Water Board and required to utilize the reporting system.

- 46. Executive Officer Delegation of Authority.** The Central Valley Water Board by prior resolution has delegated all matters that may legally be delegated to its Executive Officer to act on its behalf pursuant to Water Code section 13223. Therefore, the Executive Officer is authorized to act on the Central Valley Water Board's behalf on any matter within this Order unless such delegation is unlawful under Water Code section 13223 or this Order explicitly states otherwise.
- 47. Standard Permit Provisions and General Provisions.** Standard Provisions and General Provisions, which apply to all NPDES permits in accordance with 40 CFR 122.41, and additional conditions applicable to specified categories of permits in accordance with 40 CFR 122.42, are provided in **Attachment H** (*Standard Permit Provisions and General Provisions*) to this Order. Permittees shall comply with all standard permit provisions and general provisions with those additional conditions that are applicable under 40 CFR 122.42 provided in **Attachment H**.
- 48. Public Notice.** In accordance with and federal laws and regulations, the Central Valley Water Board notified the Permittees, interested agencies and persons of its intent to prescribe waste discharge requirements and an NPDES permit for the control of discharges into and from the MS4s to waters of the United States within the Central Valley region. The Central Valley Water Board has provided an opportunity to submit written comments and give oral testimony at a public hearing. Details regarding public notice are provided in the Fact Sheet in **Attachment F**.
- 49. Assembly Bill 2108.** Consistent with Water Code section 189.7, the Central Valley Water Board has conducted outreach to disadvantaged and tribal communities that may be affected by the Order. Pursuant to Water Code section 13149.2 the Central Valley Water Board reviewed readily available information and information raised to the Board by interested persons concerning anticipated water quality impacts in disadvantaged and tribal communities resulting from adoption of the Order. The Central Valley Water Board also considered environmental justice concerns within the Board's authority and raised by interested persons regarding those impacts. The Central Valley Water Board has provided an opportunity to submit written comments and give oral testimony at a public hearing. Details regarding public notice are provided in the Fact Sheet in **Attachment F**.
- 50. Public Hearing.** The Central Valley Water Board held a public hearing on **XX August 2026** and heard and considered all comments pertaining to the terms and conditions of this Order. Details of the public hearing are provided in the Fact Sheet in **Attachment F**.

51. Effective Date. This Order serves as an NPDES permit pursuant to CWA section 402 and becomes effective one hundred (100) calendar days after the date of its adoption, provided that the Regional Administrator, USEPA, Region IX, does not object to this Order. If the USEPA objects to its issuance, this Order shall not become effective until such objection is withdrawn.

52. Review by the State Water Board. Any person aggrieved by this action of the Central Valley Water Board may petition the State Water Board to review the action in accordance with Water Code section 13320 and California Code of Regulations, title 23, sections 2050 et seq. The State Water Board must receive the petition by 5:00 p.m., thirty (30) days after the Central Valley Water Board action, except that if the thirtieth day following the action falls on a Saturday, Sunday or State holiday, the petition must be received by the State Water Board by 5:00 p.m. on the next business day. Copies of the law and regulations applicable to filing petitions will be provided upon request or may be found on the Internet at the [State Water Board's website](https://www.waterboards.ca.gov/public_notices/petitions/water_quality/wqpetition_instr.shtml) (https://www.waterboards.ca.gov/public_notices/petitions/water_quality/wqpetition_instr.shtml) or will be provided upon request.

THEREFORE, IT IS HEREBY ORDERED that Order R5-2016-0040 (National Pollutant Discharge Elimination System Permit and Waste Discharge Requirements General Permit for Discharges from Municipal Separate Storm Sewer Systems) is rescinded upon the effective date of this General Order except as stated in Provision V.B.2 for Existing Permittees and except for enforcement purposes, and, in order to meet the provisions contained in division 7 of the Water Code (commencing with section 13000) and regulations adopted thereunder, and the provisions of the CWA and regulations and guidelines adopted thereunder, the Permittees shall comply with the requirements in this General Order upon the issuance of a NOA. This action in no way prevents the Central Valley Water Board from taking enforcement action for violations of the previous General Order.

II. DISCHARGE PROHIBITIONS

A. Storm Water Discharge Prohibitions¹⁵

1. Discharges from MS4s in a manner causing or contributing to a condition of pollution, contamination, or nuisance (as defined in Section 13050 of the Water Code) are prohibited.
2. Discharges from MS4s shall not violate any applicable prohibition in the Basin Plans.¹⁶

B. Non-Storm Water Discharge Prohibitions

1. Non-storm water discharges into MS4s shall be effectively prohibited, in accordance with 40 CFR section 122.26(d)(2)(iv)(B), unless a) such discharges are authorized by a separate NPDES permit¹⁷; b) subject to **Part II.B.3**, the discharge is a non-storm water discharge or flow addressed by **Part II.B.2**; or c) the discharge is a non-storm water discharge addressed by **Part II.B.4**.
2. Pursuant to 40 CFR section 122.26(d)(2)(iv)(B)(1), the following categories of non-storm water discharges or flows shall be effectively prohibited from

¹⁵ A Permittee may satisfy the prohibitions in this **Part II.A** by achieving full compliance with applicable provisions of **Part V.C** or **Attachment G** (for the same water body/pollutant combination(s)).

¹⁶ Basin Plans include (1) *Water Quality Control Plan for the Sacramento and San Joaquin River Basins*, Chapter IV, Implementation, page IV 23.00 and (2) *Water Quality Control Plan for the Tulare Lake Basin*, Chapter IV, Implementation Plan, page IV-25.

¹⁷ Other NPDES permits include, but may not be limited to: Individual permits, Permit for uncontaminated pumped ground water or foundation drains, footing drains, and crawl space pumps (NPDES Permit No. CAG990002, State Water Board Order WQ 2014-0174-DWQ, *Discharges from Utility Vaults and Underground Structures to Surface Waters*); NPDES Permit No. AG995002, Central Valley Water Board Order No. R5-2022-0006-003, *Limited Threat Discharges to Surface Water*).

entering a MS4 in accordance with **Part II.B.3** only if such discharges are identified by the Permittee or the Executive Officer as a source of pollutants¹⁸ to waters of the United States:

- a. Water line flushing;
- b. Landscape irrigation;
- c. Diverted stream flows;
- d. Rising ground waters;
- e. Uncontaminated ground water infiltration as defined by 40 CFR section 35.2005(20)) to separate storm sewers¹⁹;
- f. Uncontaminated pumped ground water;
- g. Discharges from potable water sources²⁰;
- h. Foundation drains;
- i. Air conditioning condensation;
- j. Irrigation water²¹;
- k. Springs;
- l. Water from crawl space pumps;
- m. Footing drains;
- n. Lawn watering;
- o. Individual residential car washing;
- p. Flows from riparian habitats and wetlands;

¹⁸ For purposes of **Part II.B** “source of pollutants” means any discharge of pollutants in concentration or mass beyond a *de minimus* amount that would cause or contribute to an exceedance or excursion of any applicable water quality standard.

¹⁹ Uncontaminated ground water infiltration is water other than wastewater that enters the MS4 (including foundation drains) from the ground through such means as defective water pipes, pipe joints, connections, or manholes. Infiltration does not include, and is distinguished from, inflow.

²⁰ Discharges from drinking water supplier distribution systems, provided appropriate BMPs are implemented based on the American Water Works Association (California-Nevada Section) *Guidelines for the Development of Your Best Management Practices (BMP) Manual for Drinking Water System Releases* (2014) or equivalent industry standard BMP manual.

²¹ Unless an agricultural discharge constitutes a point source discharge to the Permittee’s MS4 the Permittee shall be deemed to have “effectively prohibited” irrigation water in compliance with **Part II.B.3** if it demonstrates to the Central Valley Water Board that it has taken measures to seek voluntary cooperation or employ regulatory controls, if available, to control the discharge of pollutants in agricultural discharges.

- q. Dechlorinated/debrominated swimming pool/spa discharges;²²
 - r. Dewatering of decorative fountains and ponds;²³
 - s. Street/sidewalk wash water²⁴; and
 - t. Essential Non-Emergency²⁵ and Emergency Firefighting Activities.²⁶
3. For each non-storm water discharge in **Part II.B.2** that the Permittee or the Executive Officer identifies as a source of pollutants to waters of the United States, the Permittee shall satisfy the requirements to “effectively prohibit” such non-storm water by taking one of the following actions:
- a. Prohibit the discharge from entering its MS4 through implementation of an Illegal Connection and Illicit Discharge Program (IC/ID) program that meets all requirements in 40 CFR section 122.26(d)(2)(iv)(B), including adequate legal authority, source identification and enforcement; or

²² Dechlorinated/debrominated swimming pool/spa discharges do not include swimming pool/spa filter backwash or swimming pool/spa water containing bacteria, detergents, wastes, or algaecides, or any other chemicals including salts from pools commonly referred to as “salt water pools” in excess of applicable water quality objectives.

²³ Non-storm water discharges of decorative fountains do not include fountain water containing bacteria, detergent wastes, or algaecides, or any other chemical additives or treatments.

²⁴ Non-storm water discharges of Street/sidewalk wash water only include those discharges resulting from use of high pressure, low volume spray washing using only potable water with no cleaning agents.

²⁵ This includes firefighting training activities, which simulate emergency responses, and routine maintenance and testing activities necessary for the protection of life and property, including building fire suppression system maintenance and testing (e.g., sprinkler line flushing) and fire hydrant testing and maintenance. Structural and non-structural BMPs shall be implemented to reduce pollutants from essential non-emergency firefighting activities based on the CALFIRE, Office of the State Fire Marshal’s *Water-Based Fire Protection Systems Discharge Best Management Practices Manual* (September 2011, prepared in cooperation with State Water Board) for water-based fire protection system discharges, and based on a local BMP manual for fire training activities and post-emergency firefighting activities.

²⁶ Emergency firefighting flows (e.g., discharges necessary for the protection of life or property such as building fire suppression system maintenance discharges or sprinkler line flushing) do not require immediate implementation of BMPs and are not classified as prohibited non-storm water. Discharges from vehicle washing, building fire suppression system maintenance and testing (e.g., sprinkler line flushing), fire hydrant maintenance and testing, and other routine maintenance activities are not considered emergency firefighting activities.

- b. Not prohibit the non-storm water discharge but require the responsible parties to implement BMPs such that the discharges are no longer a source of pollutants to waters of the United States; or
 - c. Coordinate with Central Valley Water Board staff to ensure that the source of non-storm water discharge is identified and obtains appropriate permit coverage. The Permittee shall effectively prohibit the discharge as described in **Part II.B.3.a**, above, until such permit coverage becomes effective.
4. Non-storm water discharges associated with emergency containment and/or cleanup of a pollutant spill or release may lawfully enter a MS4 provided that a) the non-storm water does not discharge from the MS4 to waters of the United States, b) the discharge is temporarily but fully contained in the MS4 to allow for characterization and disposal, c) the pollutants are subsequently removed from the MS4 system, and d) use of the MS4 system is necessary to address a threat to human health, the environment, and/or to avoid significant property damage.

C. Trash Discharge Prohibition

The discharge of trash to surface waters of the State or the deposition of trash where it may be discharged into surface waters of the State is prohibited. Permittees shall be deemed in compliance with this prohibition through compliance with the requirements in **Attachment N**.

D. Pyrethroid Pesticides Discharge Prohibition

Discharges of pyrethroid pesticides at concentrations that exceed any pyrethroid numeric trigger in Table 4-2 of the *Water Quality Control Plan for the Sacramento and San Joaquin River Basins*, Fifth Edition to waterbodies with designated existing WARM and/or COLD beneficial uses are prohibited unless the Permittee is implementing the requirements in the 13 July 2020 *Order to Submit Technical and Monitoring Reports Pursuant to California Water Code Sections 13267 and 13383* or the TMDLs for Pyrethroid Pesticides in Sacramento and San Joaquin River Basins under **Attachment G8**.

III. EFFLUENT LIMITATIONS

A. Technology Based Effluent Limitations

Pollutants in storm water discharges from MS4s shall be reduced to the MEP.²⁷

²⁷ For the purposes of this Order, implementation of a Storm Water Management Program in a manner consistent with the framework described in **Part V.F** satisfies the requirement to control pollutants in storm water discharges to the maximum extent practicable.

B. Water Quality Based Effluent Limitations and Compliance Schedules

1. The Permittee shall comply with applicable water quality based effluent limits (WQBELs) established for the waste load allocations in TMDLs pursuant to **Attachment G** to this Order.
2. Where the final compliance deadline for an applicable TMDL has passed, the Permittee shall comply immediately with the WQBEL corresponding to that TMDL.
3. A Permittee requiring additional time to meet an applicable WQBEL in **Attachment G** where the final compliance deadline has not yet passed may request a compliance schedule as part of its SWMP or separately at a later date. Central Valley Water Board approval of a SWMP operates as approval and adoption of any compliance schedules contained therein unless otherwise specified in a Central Valley Water Board approval letter. A Permittee timely implementing a duly approved compliance schedule shall be deemed in compliance with **Parts III.B.1** and **III.B.2** for the WQBELs covered by that compliance schedule. The Permittee's requested time schedule shall include a justification satisfying the following criteria:
 - a. Diligent efforts have been made to quantify pollutant levels in the discharge and the sources of the pollutant in the waste stream, and the results of those efforts;
 - b. Source control efforts are currently underway or completed, including compliance with any pollution prevention programs that have been established;
 - c. A proposed schedule for additional source control measures or waste treatment;
 - d. Data demonstrating current treatment facility performance to compare against existing permit effluent limits, as necessary to determine which is the more stringent interim permit effluent limit to apply if a schedule of compliance is granted.
 - e. The highest discharge quality that can reasonably be achieved until final compliance is attained;
 - f. The time schedule is as short as possible, given the type of facilities being constructed or programs being implemented, and industry experience with the time typically required to construct similar facilities or implement similar programs; and
 - g. Additional information and analyses to be determined by the Central Valley Water Board on a case-by-case basis.
4. If the Permittee believes it requires additional time beyond a TMDL's final compliance date to meet the applicable WLA, the Permittee may request a

time schedule order pursuant to California Water Code section 13300 for the Central Valley Water Board's consideration. A request for a time schedule order shall include sufficient information to demonstrate to the satisfaction of the Central Valley Water Board that the Permittee needs time to implement actions, such as designing and constructing facilities or implementing new or significantly expanded programs and securing financing, if necessary, to meet the applicable WLA. Such information may include the following:

- a. Data demonstrating the current quality of the MS4 discharge(s) in terms of concentration and/or load of the target pollutant(s) to the receiving waters subject to the TMDL;
- b. A detailed description and chronology of structural controls and source control efforts, since the effective date of the TMDL, to reduce the pollutant load in the MS4 discharges to the receiving waters subject to the TMDL;
- c. Justification of the need for additional time to achieve the water quality-based effluent limitations and/or receiving water limitations;
- d. A detailed time schedule of specific actions the Permittee will take in order to achieve the water quality-based effluent limitations and/or receiving water limitations;
- e. A demonstration that the time schedule requested is as short as possible, taking into account the technological, operation, and economic factors that affect the design, development, and implementation of the control measures that are necessary to comply with the effluent limitation(s); and
- f. If the requested time schedule exceeds one year, the proposed schedule shall include interim requirements and the date(s) for their achievement.

IV. RECEIVING WATER LIMITATIONS²⁸

Except when in compliance with **Part V.C** or **Attachment G** (for the same water body/pollutant combination(s)), discharges from MS4s shall not cause or contribute to exceedances of water quality standards in any receiving waters (hereinafter "receiving water limitations"), including but not limited to all applicable provisions contained in:

²⁸ A Permittee may comply with this **Part IV** by achieving full compliance with applicable provisions in **Part V.C** or **Attachment G** (for the same water body/pollutant combination(s)).

- A. The Central Valley Water Board's Basin Plans, including beneficial uses, surface water quality objectives, compliance schedules and implementation plans;²⁹
- B. State Water Board policies and plans for water quality control;³⁰ and
- C. Priority pollutant criteria promulgated by the USEPA through the following:
 - 1. National Toxics Rule (NTR),³¹ and
 - 2. California Toxics Rule (CTR).³²

V. PROVISIONS

A. Standard Permit Provisions and General Provisions

The Permittee shall comply with all applicable Standard Permit Provisions and General Provisions contained in **Attachment H** to this Order, in accordance with 40 CFR sections 122.41 and 122.42.

B. Application Requirements

The Order becomes effective on **XX XXXXXXXX 2026**. To obtain coverage under this Order on or after that date, each Permittee must submit a complete application for coverage as set forth below.

1. New Permittees - Notice of Intent (NOI)

- a. To obtain initial coverage under this Order, a New Permittee shall submit to the Central Valley Water Board (centralvalleysacramento@waterboards.ca.gov), or the Storm Water Multiple Application Reporting and Tracking System (SMARTS) database when available, a complete Notice of Intent (NOI) (**Attachment L**) in accordance with the procedures below. A NOI must be completed and signed in accordance with the signatory requirements of the *Standard*

²⁹For specific beneficial uses water quality objectives, implementation plans and applicable water bodies, see *Water Quality Control Plan for the Sacramento and San Joaquin River Basins* (Revised April 2016) and the *Water Quality Control Plan for the Tulare Lake Basin* (Revised January 2015) (collectively referred to as "[Basin Plans](#)" herein) at (https://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/index.html#basinplans)

³⁰*Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary and Water Quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries*

³¹40 CFR § 131.36.

³²*Policy for Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California*, (65 Federal Register 31682-31719 (May 18, 2000), adding 40 CFR section 131.38. If water quality objectives and a CTR criterion are in effect for the same priority pollutant, the more stringent of the two applies.

Permit Provisions and General Provisions (Attachment H). The NOI shall also contain a brief preliminary explanation of how the New Permittee intends to prioritize pollutants in its SWMP in accordance with **Part V.F.** Failure to submit a complete NOI package may delay approval to discharge under this Order.

- i. A New Permittee desiring coverage under this Order that, as of the Effective Date of this Order, was authorized to discharge under an individual Central Valley Water Board or State Water Board MS4 permit that has not yet expired shall submit a NOI to the Executive Officer no later than thirty (30) days prior to the expiration date of its current MS4 permit. A New Permittee authorized to discharge pursuant to an administratively extended MS4 permit shall submit a NOI within thirty (30) days of the Effective Date of this Order. [40 CFR § 122.28(b)(2)(iii)].
 - ii. A New Permittee desiring coverage under this Order that was not previously authorized to discharge under another Central Valley Water Board or State Water Board MS4 permit shall submit a NOI at least ninety (90) days in advance of the anticipated discharge date to provide time for review of the application package (40 CFR § 122.28(b)(2)(iii)). This time period may be waived by the Executive Officer;
 - iii. An application fee is required only for New Permittees described in **Part V.B.1.a.ii**, above. A New Permittee applying for coverage under this Order which has already been enrolled under a previous Central Valley Water Board or State Water Board MS4 permit will be billed during the regular annual billing cycle.
 - iv. Some New Permittees are required under their existing individual Central Valley Water Board or State Water Board MS4 permits to submit a Report of Waste Discharge (ROWD) 180 days prior to the expiration of their permit. If, before the expiration of the 180-day deadline, such New Permittees instead submit a letter to the Executive Officer committing to submit a NOI no later than thirty (30) days prior to the expiration of their permit, the Central Valley Water Board will not pursue enforcement for failure to timely file a ROWD unless the New Permittee fails to submit a NOI by such 30-day deadline.
- b. Within ninety (90) days of receipt of a NOI, the Central Valley Water Board will either issue a Notice of Applicability (NOA) or deny the NOI if incomplete. If a NOA is issued the New Permittee is authorized to discharge pursuant to this Order starting on the date indicated on the NOA (40 CFR section 122.28(b)(2)(iii)).
 - c. Upon issuance of a NOA to a New Permittee described in **Part V.B.1.a.i**, this Order rescinds the New Permittee's preexisting permit except for enforcement of permit violations that occurred prior to the issuance of the NOA. New Permittees listed in the preexisting permit who have not

received a NOA under this Order shall continue to be subject to regulation pursuant to the preexisting permit. If all New Permittees have been removed from the preexisting permit then this Order rescinds the preexisting permit, except for enforcement purposes as stated above.

2. Existing Permittees – Notice of Intent to Re-Enroll

- a. Existing Permittees under Order R5-2016-0040 shall remain covered under that permit until a NOA is issued for coverage under this Order; or Permit coverage is terminated pursuant **Part V.B. 3** of R5-2016-0040.
- b. To enroll in coverage under this Order, an Existing Permittee shall submit to the Central Valley Water Board (centralvalleysacramento@waterboards.ca.gov), or the Storm Water Multiple Application Reporting and Tracking System (SMARTS) database when available, a Notice of Intent (NOI) to Re-Enroll (**Attachment O**) and a complete Annual Report for fiscal year 2025-2026 in accordance with the procedures below. A NOI to Re-Enroll must be completed and signed in accordance with the signatory requirements of the *Standard Permit Provisions and General Provisions* (**Attachment H**). The process for re-enrollment is outlined below:
 - i. Within sixty (60) days of the effective date of the Order, submission of the NOI to Re-Enroll and Annual Report for Fiscal Year 2025-2026. There is no need to resubmit the Annual Report for fiscal year 2025-2026 with the NOI to Re-Enroll if it has already been submitted.
 - ii. Within ninety (90) days of receipt of the NOI to Re-Enroll and, if applicable, the Annual Report for Fiscal year 2025-2026, the Central Valley Water Board will issue a NOA or identify if additional information is requested prior to issuing the NOA.
 - iii. Once the NOA is issued, an Existing Permittee is authorized to discharge pursuant to this Order starting on the date indicated on the NOA. On the NOA issue date, an Existing Permittee shall resume the timeline for the step in the process of their storm water management plan development outlined in **Table 3** under **Part V.G.2**.

3. Fees

The fee for enrollment under this Order is payable to the “State Water Resources Control Board” and shall be based on California Code of Regulations, title 23, section 2200, which is available on the [State Water Board's](http://www.waterboards.ca.gov/resources/fees/water_quality/) website at (http://www.waterboards.ca.gov/resources/fees/water_quality/).

4. Terminating Coverage

- a. To terminate coverage under this Order, the Permittee must submit to the Executive Officer a complete and accurate Notice of Termination (NOT) provided in **Attachment M** within thirty (30) days following permanent termination of a discharge, upon transfer of ownership to another entity, or where discharges will be authorized under another Order. Upon Executive Officer approval of the NOT, the Permittee's authorization to discharge and obligations under this Order shall terminate immediately upon approval of the NOT. Until a NOT is approved, the Permittee shall remain subject to the terms and conditions of this Order and is responsible for submitting the annual fee and all reports associated with this Order.
- b. The Permittee shall submit a NOT when one of the following conditions occurs:
 - i. The Permittee has ceased all discharges to waters of the United States for which the MS4 obtained coverage under this Order and does not expect to discharge during the remainder of this permit term; or
 - ii. The Permittee has obtained coverage under an individual permit or an alternative general permit for all discharges required to be covered by a NPDES permit.

C. Alternative Compliance Pathway

1. For pollutant-water body combinations addressed in a Permittee's SWMP that are not addressed in a TMDL, the Permittee shall be deemed in compliance with **Parts II.A** (*Storm Water Discharge Prohibitions*) and **IV** (*Receiving Water Limitations*) as long as:
 - a. The Permittee is fully implementing a duly approved SWMP that meets the requirements of **Parts V.C.4 and V.F.3**; and
 - b. The Permittee either:
 - i. Is meeting all applicable milestones and final dates for attainment of water quality standards in the SWMP, or
 - ii. Complies with the procedure described in **Part V.C.5**.

For the purposes of determining compliance with **Part IV**, a Permittee's "final attainment" of a water quality standard shall mean either that the Permittee's MS4 discharges are no longer causing or contributing to exceedances of that water quality standard in any receiving water or that the receiving water is meeting water quality standards. A Permittee shall only be deemed in such final attainment when it is verified through monitoring and reporting results.

2. For pollutant-water body combinations addressed in a TMDL, a Determination of Compliance in accordance with **Attachment G** shall constitute compliance with **Parts II.A**, **Part III.B**, and **Part IV** for the same water body/pollutant combination(s).

3. To be deemed in compliance with **Parts II.A and IV** as described in **Part V.C.1**, the Permittee's SWMP must ensure continual progress toward final attainment of applicable water quality standards by including the following:
 - a. Specific and enforceable requirements.
 - b. Milestones toward final attainment for each PWQC³³ that are either numeric water quality outcomes (hereinafter "water quality milestones") or readily verifiable, specific actions that are prerequisites to achieving such water quality outcomes—including but not limited to preparing a planning document or obtaining financing or approval for a capital improvement project (hereinafter "non-water quality milestones"). For each PWQC, the SWMP must include at least one milestone³⁴ per year, including a date for its achievement, as well as a final date of attainment. For each PWQC the SWMP must include at least one water quality milestone per five (5) years.
 - c. An analysis or study complying with **Part V.F.3.b** demonstrating that implementation of the water quality improvement strategies in the SWMP will achieve milestones and final attainment with water quality standards by the scheduled dates for their achievement.
4. If, after complying with **Parts V.D, V.F, and V.G**, the Permittee detects³⁵ or receives notification from the Central Valley Water Board that a water quality milestone or a final date for attainment for a water quality standard in the Permittee's SWMP was not met, the Permittee shall complete the following:
 - a. Re-assess its MS4 discharges' contribution of the relevant pollutant(s) to receiving waters and the sources of the pollutant(s) within the drainage area of the MS4. If such re-assessment shows that the Permittee's discharges did not cause or contribute to non-achievement of the water quality milestone or final date of attainment, no further action is required, and the Permittee shall continue to implement its SWMP.
 - b. If discharges from the Permittee's MS4 are identified as a source of pollutant(s) that have caused or contributed to not achieving the milestone

³³ See **Part V.F**, *infra*.

³⁴ Annual milestones for each PWQC may be either water quality milestones or non-water quality milestones, but they must build upon previous milestones and lead to final attainment of applicable water quality standards for that PWQC. The annual milestones may consist of water quality improvement strategy implementation phases, interim numeric goals, and/or other acceptable metrics.

³⁵ "Detection" by a Permittee may include a Permittee's determination prior to a deadline, based on monitoring or other relevant data, that it will not be able to meet a water quality milestone/final date of attainment. If the Permittee thereafter obtains a timely extension of the applicable deadline pursuant to **Part V.C.7**, the Permittee's failure to meet the preexisting deadline shall not trigger **Part V.C.5**.

or final date for attainment of a water quality standard, address such non-compliance through timely modifications to its SWMP pursuant to **Parts V.F.5 and V.F.6** (*Effectiveness Assessment; Adaptive Management and Modification*). The modified SWMP shall identify the revised water quality control measures, milestones, and final date of attainment that will ensure an improved rate of progress toward attainment of water quality standards.

- c. Modify the Reasonable Assurance Analysis (RAA) pursuant to **Parts V.F.5 and V.F.6** (*Effectiveness Assessment; Adaptive Management and Modification*) to reflect the Permittee's updated knowledge about the pollutant(s) and revised water quality control measures, milestones, and final date of attainment. The Permittee shall submit with its modified RAA a summary explanation of why implementation of its SWMP did not result in meeting the water quality milestone or final date of attainment.
 - d. To be deemed in compliance with this **Part V.C.5**, the Permittee must submit its revised SWMP and RAA to the Executive Officer within six (6) months of detecting or receiving notice from the Central Valley Water Board (whichever is earlier) that the water quality milestone or final date of attainment was not met.³⁶ The Permittee may request an extension for the submittal of the SWMP and RAA. Such requests must be made in writing and include a justification for the extension and proposed dates of submittal. Extensions may be approved at the discretion of the Executive Officer, but they shall not become effective until affirmatively approved. Notwithstanding the Permittee's compliance with the procedures in this **Part V.C.5**, the Permittee will be deemed in violation of this Order if the Executive Officer determines that the Permittee's failure to achieve the water quality milestone or final date of attainment resulted from failure to fully implement its SWMP. Such determination will be delivered in writing.
5. If the Permittee fails to meet any water quality milestone or final date for attainment of a water quality standard in an approved SWMP, and thereafter fails to timely seek appropriate modifications to its SWMP and RAA as described in **Part V.C.4**, this Order shall hold the Permittee to strict compliance with **Parts II.A and IV** for the pollutant-water body combination(s) that were to be addressed by the SWMP provisions that were not met.
 6. For pollutant-water body combinations that are not addressed by a TMDL, the Permittee may request an extension of a deadline for achieving a water quality milestone or final attainment of a water quality standard at least ninety (90) days prior to the deadline. Such requests must be in writing, shall include a justification for the extension, and shall state (i) when the Permittee expects to achieve the water quality milestone, and (ii) whether the delayed date for

³⁶ If the Permittee determines that it will not be able to meet a water quality milestone or final date of attainment prior to the relevant deadline, six months shall be measured from the date for achieving that water quality milestone or final attainment of water quality standards.

achievement of the water quality milestone will result in corresponding delays for other milestones or for the final date of attainment for any PWQC. The Executive Officer shall publish notice and accept comments on such extension requests for a period of thirty (30) days. Extensions may be approved at the discretion of the Executive Officer, but they must be affirmatively approved to be effective. The Permittee shall become subject to **Part V.C.5** upon denial of an extension request.

7. When a Permittee becomes aware that it has missed or will miss the date for achieving a water quality milestone and/or non-water quality milestone (e.g., delays in obtaining City Council approval or financing for a capital improvement project, delays in adoption of an ordinance), the Permittee shall notify the Central Valley Water Board in writing as soon as possible, but no later than thirty (30) days after the delay becomes evident. In such written notice, the Permittee shall indicate (i) when it expects to achieve the water quality milestone and/or non-water quality milestone, and (ii) whether the delayed date for achievement of the water quality milestone and/or non-water quality milestone will result in corresponding delays for other milestones or for the final date of attainment for any PWQC. If failure to timely achieve the water quality milestone and/or non-water quality milestone will prevent the Permittee from meeting any water quality milestone or final attainment by the date scheduled in its SWMP, the Permittee shall request appropriate extensions in accordance with **Part V.C.6**.
8. Between a Permittee's receipt of a NOA and approval of its SWMP, a Permittee's full compliance with all of the following requirements shall constitute the Permittee's compliance with **Parts II.A, III.B, and IV**:
 - a. The Permittee's NOI was timely submitted in accordance with **Part V.B.1**;
 - b. The Permittee meets all deadlines for development of a SWMP; and
 - c. The Permittee continues full implementation of its existing Storm Water Management Program.
9. A comprehensive audit of the RAA is required at least once every 10 years after approval of the revised SWMP. If the audit finds that the RAA is no longer current or accurate, then the Permittee shall revise the RAA and submit it to the Central Valley Water Board for approval consistent with the schedule in **Part V.G.2**, Steps **3.a** through **4.d**, as applicable. The audit requirement may be waived by the Executive Officer if all water quality milestones are being met.

D. Pollutant Prioritization and Prescriptive Approaches

This Order specifies two distinct and mutually exclusive approaches for the Permittee to comply with this permit authorized under the Clean Water Act, including compliance with the discharge prohibitions and receiving water limitations. The primary compliance approach (Pollutant Prioritization) allows the participating Permittee to develop a customized storm water management

program. The secondary compliance approach (Prescriptive) is reserved only for Permittees that are unsuccessful in complying with the requirements under the Pollutant Prioritization approach and shall follow a more traditional approach to compliance instead.

1. Pollutant Prioritization Approach

The Pollutant Prioritization approach focuses on the outcomes to be achieved rather than prescribing specific actions with which Permittees shall comply. In its SWMP, a Permittee describes prioritized water quality constituents and milestones, strategies, and activities based on those prioritized water quality constituents. This approach allows the Permittee to optimize water quality improvements by shifting resources and taking different approaches to achieving outcomes or performance. This approach allows the Permittee to address prioritization of water quality issues within their Jurisdictional Runoff Area by describing customized Storm Water Management Program milestones, strategies, and activities in their SWMP consistent with the requirements of this Order.

2. Prescriptive Approach

- a. This Order contains prescriptive permit requirements that serve as a “backstop” if a Permittee fails to implement the Pollutant Prioritization approach in the manner described herein. The Executive Officer may require implementation of the Prescriptive approach if the Permittee fails to:
 - i. Develop deliverables described in **Part V.G.2** that fully comply with the requirements of this Order and/or submit such deliverables within the timeframes described in **Part V.G.2**; or
 - ii. Fully implement and adaptively manage an effective Storm Water Management Program as described in a SWMP prepared under the Pollutant Prioritization approach and approved by the Central Valley Water Board.
- b. A Permittee that becomes bound by the Prescriptive approach in accordance with **Part V.D.2** is ineligible to participate in the Pollutant Prioritization approach for a period of five (5) years from the effective date of the decision by the Executive Officer. When the Permittee has demonstrated full compliance with the requirements of this Order after five (5) years, the Permittee may submit a written request to be re-instated in the Pollutant Prioritization approach to the Executive Officer. The Executive Officer may re-institute implementation of the Pollutant Prioritization approach when it is determined that the Permittee has achieved or will achieve full compliance with the requirements of this Order. The Executive Officer may, at his/her discretion, re-institute the Pollutant Prioritization approach for a Permittee earlier than five (5) years from his/her decision under **Part V.D.2**.

E. Existing Permittees

1. Certain provisions in the Order have already been satisfied by Permittees enrolled in Order R5-2016-0040. These Permittees are referred to as Existing Permittees in this Order. In these cases, the Existing Permittees shall resume the timeline for the step in the process for where they are at (**Table 3, Part V.G.2**) as indicated in the NOI to Re-Enroll and continue to implement their existing program as approved under the storm water management permit framework in **Attachment A** until Central Valley Water Board approval of an updated Storm Water Management Plan.

F. Implementation of the Storm Water Management Framework

For both the Pollutant Prioritization and Prescriptive compliance approaches authorized under this Order, the overall framework for developing and implementing a Storm Water Management Program is illustrated in **Attachment A** (*Storm Water Management Framework for Order R5-2026-XXX*). The process consists of six overarching steps: assessment, prioritization, development/modification, implementation, effectiveness assessment and reporting, and adaptive management. A Permittee that complies pursuant to the Pollutant Prioritization approach shall address all steps in this process. A Permittee that complies pursuant to the Prescriptive approach shall address all steps in this process except prioritization. Under either approach, a Permittee that implements its Storm Water Management Program in a manner fully consistent with the framework described in this **Part V.F** satisfies the requirement in **Part III.A** to control pollutants in storm water discharges to the maximum extent practicable.

Under the Pollutant Prioritization compliance approach the Permittee must identify the highest priority water quality constituents (PWQCs) within its Jurisdictional Runoff Area that will be addressed by the SWMP. Under the Prescriptive compliance approach, all water quality constituents shall be treated as PWQCs. As determined by the Permittee(s), the Jurisdictional Runoff Area(s) may be combined or separated into geographical areas, drainage areas, watersheds, or sub-watersheds to assist in focusing the water quality prioritization and SWMP implementation efforts. Although the process is generally outlined below, each Permittee will identify how the local PWQCs are determined on a site-specific basis. For these assessments, each Permittee shall rely on readily available and relevant existing data and information.

Permittees may have existing programs that can be used to satisfy parts of these requirements. The Permittee may start at any step in the process so long as the preceding step(s) have been completed consistent with this Order. The Permittee's Storm Water Management Program shall integrate a storm water management framework describing each step in the process within its SWMP.

1. Assessment

The purpose of the assessment step is to develop a list of water quality constituents (WQCs) that may be adversely impacting water quality. The

Permittee shall identify all water quality issues within its Jurisdictional Runoff Area in order to identify WQCs within its local receiving waters and MS4 discharges. The Permittee shall describe its methodology and all criteria used to identify local water quality issues in its SWMP, including:

- i. Data source(s) for each WQC;
 - ii. The geographic extent of the WQC's impact, if known;
 - iii. The temporal extent of the WQC's impact (e.g., dry weather and/or wet weather or other driving cyclic patterns, if known); and
 - iv. The adequacy of available data and data gaps in the monitoring data relied on to develop a list of WQC.
- a. Assessment of Receiving Water Conditions

Based on a compilation of available monitoring data from receiving water monitoring locations, the Permittee shall evaluate the range of water quality issues that may be adversely impacting receiving water quality within its Jurisdictional Runoff Area. For the assessment, the Permittee should consider WQCs as identified in the following sources:

- i. Total Maximum Daily Loads (TMDLs) and CWA section 303(d) List
 - (1) TMDLs adopted and/or under development by the Central Valley Water Board for water bodies or segments of water bodies within the Permittee's Jurisdictional Runoff Area where the Permittee and/or water body or water body segment has received a waste load allocation (**Attachment G, Specific Provisions for Total Maximum Daily Loads Applicable to Order R5-2026-XXX**). Sources for pollutants should have been identified as urban runoff and/or storm water runoff; and
 - (2) The most current USEPA approved CWA section 303(d) listing of water bodies or water body segments and associated pollutants;
- ii. Results of water quality monitoring conducted by the Permittee;
- iii. Results of special studies conducted along receiving waters, including;
 - (1) Bioassessment monitoring;
 - (2) Sediment or water column toxicity monitoring; and
 - (3) Constituent focused (e.g., dissolved oxygen, nutrients) monitoring;
- iv. Other monitoring efforts, such as:
 - (1) Litter/Trash impacts;
 - (2) Physical habitat;

- (3) Hydromodification monitoring and implementation;
- (4) Water and sediment quality data and information collected or compiled by other entities.³⁷

b. Assessment of MS4 Discharges

Based on the results of **Part V.F.1.a**, the Permittee shall evaluate its MS4 discharges' contribution to the range of water quality issues that were identified in the receiving waters within the Jurisdictional Runoff Area. From that data, the Permittee shall identify a list of WQCs that represent water quality issues in receiving waters attributable to the Permittee's MS4 discharges.

c. Assessment Showing Final Attainment

If the assessments conducted pursuant to **Parts V.F.1a and V.F.1.b** demonstrate that the Permittee's discharges are not causing or contributing to exceedances of any applicable WQS, the Permittee shall provide the Central Valley Water Board with evidence demonstrating the Permittee's attainment of all applicable WQSS. Upon receiving concurrence from the Executive Officer, the Permittee shall continue implementing its Storm Water Management Program, including but not limited to applicable monitoring and reporting. Based on the results of the adaptive management process in **Part V.F.6**, the Permittee shall report any modification necessary to improve the effectiveness of the Storm Water Management Program. If monitoring results indicate that the Permittee is not in attainment with one or more WQSS, then the Permittee shall revise its SWMP to address those WQSS pursuant to **Part V.F** and comply per **Part V.C**.

2. Prioritization

The purpose of the prioritization step is to rank the assessed WQCs, thereby identifying the highest priority WQCs (PWQCs) to be addressed by the Permittee's Storm Water Management Program. Using the information obtained through the assessment step, the Permittee shall generate a list of PWQCs that are not being attained within its receiving waters and for which the MS4 discharges are causing or contributing to exceedances of WQS. The SWMP shall provide a clear explanation justifying the prioritization criteria and methods for the selection of the PWQCs. Under the Prescriptive compliance approach, all WQCs shall be treated as PWQCs.

³⁷ Sources may include the [California Environmental Data Exchange Network \(CEDEN\)](http://www.ceden.org/), (<http://www.ceden.org/>); [USEPA's STORET/Water Quality Exchange \(WQX\)](https://www.epa.gov/waterdata/water-quality-data), (<https://www.epa.gov/waterdata/water-quality-data>); [United States Geological Survey's Water Quality Portal](https://www.usgs.gov/mission-areas/water-resources/data), (<https://www.usgs.gov/mission-areas/water-resources/data>); and other site specific studies conducted by watershed groups, academic and/or research institutions.

3. Development

The purpose of the development step is for the Permittee to structure the SWMP to address the PWQCs it identified during the prioritization step.

Using the steps described below, the Permittee shall identify appropriate milestones, strategies and activities that, over time, will ensure that the Permittee's MS4 discharges will no longer cause or contribute to exceedances of water quality standards in any receiving water. The milestones, strategies and activities shall address the PWQC(s) by (1) effectively prohibiting non-storm water discharges into the MS4, (2) reducing pollutants in storm water to the MEP, and (3) taking other measures necessary to ensure that the Permittee's MS4 discharges do not prevent attainment of water quality standards in receiving waters. The results of the assessment, prioritization, and development steps shall be incorporated into the Permittee's SWMP for future modification based on effectiveness assessments.

- a. Identify Milestones, Strategies, and Activities for Storm Water Management Program
 - i. The Permittee shall identify interim milestones and final dates of attainment for each PWQC.³⁸ The milestones shall be based on measurable quantifiable criteria or indicators capable of demonstrating progress toward final attainment of water quality standards.
 - (1) "Milestones," as used in this Order, are the interim benchmarks for measuring a Permittee's progress toward meeting applicable WQBELs and/or ensuring that its MS4 discharges no longer cause or contribute to exceedances of applicable water quality standards in any receiving water. Milestones must be numeric or otherwise measurable, and must relate either to taking a specific action or achieving a numeric water quality-related outcome. Subsequent milestones must build on previous ones, and each milestone must include a date for its achievement. Permittees must identify at least one annual milestone for each PWQC.
 - (2) With the exception of final dates for achieving WQBELs in a TMDL, final dates for attaining water quality standards may be modified in accordance with the procedure described in **Part V.C.3**.
 - ii. The Permittee shall identify specific strategies and activities for timely achieving milestones and final dates of attainment through its Storm

³⁸ Milestones may take a variety of forms, such as receiving water limitations, interim or final WQBELs established in TMDLs, action levels or benchmarks, pollutant concentration, load reductions, number of impaired water bodies delisted from the List of Water Quality Impaired Segments, Index of Biotic Integrity (IBI) scores, or other appropriate metrics.

Water Management Program. For each PWQC, such strategies and activities shall be designed to ensure that, by the final dates of attainment, the Permittee's MS4 discharges will cease to cause or contribute to exceedances of applicable water quality standards in receiving waters. The Permittee's SWMP shall include a general implementation schedule for the strategies and activities identified in this step. Detailed implementation schedules will be developed as part of the Work Plan.

- iii. The Permittee shall identify the approach for monitoring and each program element to address the PWQCs, including the pollution prevention, operational source controls, and/or any other actions or programs capable of achieving final attainment with water quality standards.
- iv. The Permittee shall identify the management questions and metrics that will be used to measure the program effectiveness and verify whether the program is meeting the established milestones. The following management questions may be used to assist in guiding the development of a monitoring program, assist with the prioritization of storm water management efforts³⁹, and/or develop milestones:
 - (1) Are applicable water quality standards being met in receiving waters?
 - (2) If standards are not being met, what is the extent and magnitude of the current or potential receiving water problems? What is the relative urban runoff contribution to the receiving water problem(s)?
 - (3) Where urban runoff is determined to cause or contribute to the receiving water problem(s), what are the pollutant sources?
 - (4) Of the identified urban runoff sources, which readily avail themselves to correction by the municipality such that efforts can be prioritized?
 - (5) After control strategies are implemented, are conditions in MS4 discharges and receiving waters getting better or worse?
- v. The Permittee shall develop an effectiveness assessment approach and associated metrics to assess the efficacy of the Storm Water

³⁹ The management questions are based, in part, on the Storm Water Monitoring Coalition's Model Monitoring Technical Committee Technical Report #419: [Model Monitoring Program for Municipal Separate Storm Sewer Systems in Southern California](https://ftp/sccwrp.org/pub/download/DOCUMENTS/TechnicalReports/419_smc_mm.pdf).

(https://ftp/sccwrp.org/pub/download/DOCUMENTS/TechnicalReports/419_smc_mm.pdf)

Management Program's milestones, strategies, and activities as described in **Part V.F.5**.

b. Reasonable Assurance Analysis

For the PWQC(s), the Permittee shall conduct and submit with its SWMP a Reasonable Assurance Analysis (RAA) providing reasonable assurance that the Permittee's proposed strategies and activities will succeed in timely achievement of all water quality milestones, and final dates for attaining water quality standards. The Permittee may address multiple PWQCs in a single RAA, but each PWQC must be addressed by at least one RAA.

The RAA must be, at a minimum, a quantitative evaluation that relies on (1) best management practices performance data, and (2) reasonable assumptions that are clearly stated. The RAA must be supported, at least in part, by models that are in the public domain or by comparable methodologies with wide acceptance, such as trend analyses that demonstrate the necessary level of feasible control measure implementation so that the discharges do not cause or contribute to exceedances of water quality standards. The evaluation should provide an error estimate for annual average loads or other relevant targets or propose modifications to the assessment program to refine the quantification as new information is collected. The models may use established surrogate relationships between water quality constituents and PWQC concentrations and/or loads.

Models to be considered for the RAA include but are not limited to: land/watershed model (e.g., Hydrologic Simulation Program-FORTRAN (HSPF) model), BMP performance models (e.g., Storm Water Management Model (SWMM) BMP model), or integrated BMP model (e.g., USEPA System for Urban Stormwater Treatment and Analysis Integrational (SUSTAIN) model). To the extent that multiple Permittees propose to address the same PWQC(s) with the same/substantially similar strategies and activities, those Permittees may pool their resources to jointly conduct and rely on an RAA. In addition, the RAA may evaluate multiple constituents and ultimately identify the limiting pollutant that drives the implementation strategies and activities.

The RAA shall commence with assembly of the available, relevant data collected, including land use and pollutant loading data, establishment of quality assurance/quality control (QA/QC) criteria, QA/QC checks of the data, and identification of the data set meeting the criteria for use in the analysis. These data shall be statistically analyzed to determine the best estimate of performance and the confidence limits on that estimate for the pollutants to be evaluated. Based on estimated baseline conditions and pollutant loadings, required pollutant reductions are estimated and best management practices and an implementation schedule will be generated.

The RAA shall be submitted in accordance with the SWMP development timeframes described in **Part V.G.2**.

c. Storm Water Management Plan

The objective of the SWMP is to describe a Storm Water Management Program that identifies and addresses MS4 discharge impacts so that such discharges do not cause or contribute to exceedances of water quality standards in waters of the United States. As such, the implementation of the SWMP and this Order provides the basis of compliance with **Parts II, III, and IV** (*Discharge Prohibitions, Effluent Limitations, and Receiving Water Limitations*). The SWMP shall describe the Permittee's Storm Water Management Program, including milestones, strategies and activities, and their corresponding schedules for implementation.

Regardless of whether the Permittee is bound by the Pollutant Prioritization or Prescriptive approach, a SWMP shall be developed and submitted for approval by the Central Valley Water Board.

If the Permittee or a group of Permittees has already developed a SWMP, the Permittee(s) may assess the existing SWMP to determine what modifications, if any, are necessary in order to comply with this Order. If the existing SWMP meets the requirements of this Order, then it is not necessary to revise the SWMP further. In either case, the Permittee or group of Permittees shall submit the SWMP for approval by the Central Valley Water Board.

In the case where a Permittee would like to collaborate, or has traditionally collaborated, in whole or in part with other MS4 Permittees to manage its MS4 permit compliance, those Permittees may submit one combined SWMP that describes the consolidated or coordinated Storm Water Management Program milestones, strategies, and activities. However, SWMPs developed jointly shall identify each Permittee's separate roles and responsibilities implementing a coordinated Storm Water Management Program. Each Permittee is individually responsible for compliance with this Order, the coordinated Storm Water Management Program, and the joint SWMP.

i. Pollutant Prioritization Approach

The Permittee shall develop a SWMP describing their Storm Water Management Program consistent with the Pollutant Prioritization approach described in **Attachment J** (*Pollutant Prioritization Approach Requirements*).

ii. Prescriptive Approach

If the Executive Officer determines that a Permittee has been unsuccessful in complying with requirements described under the Pollutant Prioritization approach, **Attachment J** (*Pollutant Prioritization Approach Requirements*), the Permittee shall instead follow the Prescriptive approach described in **Attachment K** (*Prescriptive Approach Requirements*).

4. Implementation

Once the Permittee receives Central Valley Water Board approval of the SWMP developed pursuant to this Order, the Permittee shall immediately transition to implementation of that SWMP and its corresponding Work Plan.⁴⁰ Central Valley Water Board approval of a Permittee's SWMP renders that SWMP an enforceable component of this Order. Prior to such approval, the Permittee shall continue full implementation of its preexisting Storm Water Management Program.

5. Effectiveness Assessment

a. General Requirements of Effectiveness Assessment Program

As a part of the SWMP, the Permittee shall develop and implement an effectiveness assessment approach⁴¹ to track the short- and long-term effectiveness of its Storm Water Management Program in addressing the PWQCs. The effectiveness assessment approach shall address the non-water quality and/or water quality milestones and identify the following for each PWQC:

- i. The milestones that will be addressed as well as the corresponding outcome levels, management questions and metrics that will be used for the assessment⁴²;
- ii. The data assessment and data collection methods that will be utilized; and

⁴⁰ See **Part V.G.5**, *infra*, for discussion of Work Plan.

⁴¹ The approach may be informed by one or more of the following guidance documents or equivalent (1) *Evaluating the Effectiveness of Municipal Stormwater Programs*, EPA 833-F-07-010, USEPA, January 2008; (2) *A Strategic Approach to Planning for and Assessing the Effectiveness of Stormwater Programs*, February 2015, California Stormwater Quality Association; and (3) [Program Effectiveness Assessment Improvement Plan Framework](https://www.casqa.org/resources/programmatic-effectiveness-assessment/guidance-documents/peaip-framework#:~:text=The%20CASQA%20Program%20Effectiveness%20Assessment,the%20Effectiveness%20of%20Stormwater%20Programs%20()), April 2015, ([https://www.casqa.org/resources/programmatic-effectiveness-assessment/guidance-documents/peaip-framework#:~:text=The%20CASQA%20Program%20Effectiveness%20Assessment,the%20Effectiveness%20of%20Stormwater%20Programs%20\(\)](https://www.casqa.org/resources/programmatic-effectiveness-assessment/guidance-documents/peaip-framework#:~:text=The%20CASQA%20Program%20Effectiveness%20Assessment,the%20Effectiveness%20of%20Stormwater%20Programs%20()))

⁴² The effectiveness assessment should focus on the outcome levels and metrics that are most applicable to the specific goals established for the PWQC(s).

- iii. The timeframe (i.e., short- and/or long-term) for assessing each of the management questions.

The effectiveness assessment approach will assist the Permittee in adaptively managing its Storm Water Management Program so that it effectively addresses the PWQCs and tracks the progress of the SWMP in achieving the identified milestones. The results of the effectiveness assessments will be provided in in the Mid-Term Report (short term effectiveness assessment) and End-Term Report (short and/or long-term effectiveness assessment).

b. Specific Requirements for Long-Term Effectiveness Assessments

The Permittee shall conduct long-term assessments of its MS4 discharges and receiving water conditions in the Jurisdictional Runoff Area based on relevant data collected pursuant to the requirements of this Order. The assessment results will be provided in the End-Term Report.

i. Receiving Water Assessment

The Permittees shall assess the status and trends of receiving water quality conditions within the Jurisdictional Runoff Area under dry weather and wet weather conditions.

ii. MS4 Discharge Assessment

The Permittee shall assess the status and trends of MS4 discharge conditions within the Jurisdictional Runoff Area under dry weather and wet weather conditions. This may include, as applicable, a calculation or estimation of the storm water volumes, pollutant concentrations, and/or pollutant loads discharged from the MS4.

c. Effectiveness Assessment Reporting

When reporting on the effectiveness of its Storm Water Management Program, the Permittee shall:

- i. Identify the management questions and metrics that were used for the assessment;
- ii. Identify the direct and/or indirect measurements that were used to track the effectiveness of the Storm Water Management Program as well as the outcome levels at which the assessment is occurring; and,
- iii. Track the progress of the SWMP towards achieving the milestones, strategies, and activities aimed at improving water quality; and,
- iv. At the end of Year 3, the Permittee shall provide short term effectiveness assessment results in the Mid-Term Report; and,
- v. At the end of Year 5, the Permittee shall provide a long-term effectiveness assessment in the End-Term Report.

6. Adaptive Management and Modification

The Permittee shall implement an adaptive management approach and modify the SWMP and/or Work Plan so that the Storm Water Management Program is effective over the long-term. The adaptive management process fulfills the requirements in **Part V.C** to address continued exceedances of water quality standards. As applicable, the Permittee shall evaluate the results of each effectiveness assessment and determine if significant progress is being made and/or if the identified milestones are being achieved. The adaptive management approach shall be described in the Permittee's SWMP. Specifically, the Permittee shall develop and implement an adaptive management approach that addresses the following:

- a. Progress towards achieving improved water quality in receiving waters and/or MS4 discharges, based on the Effectiveness Assessment (**Part V.F.5**);
- b. Achievement of milestones and final dates for attainment of water quality standards, including providing quantifiable reductions in pollutant concentrations and/or loads in MS4 discharges over time;
- c. Re-evaluation of the water quality priorities based on newly identified sources and/or more recent monitoring data for discharges from the MS4 and the receiving water(s), and the effectiveness of implemented pollutant controls;
- d. Overall status of attainment of water quality standards; and
- e. Availability of new information and data from sources other than the Permittee's monitoring program(s) that informs the effectiveness of the actions implemented by the Permittees.

Based on the results of the adaptive management process, the Permittee shall report any modification, including of milestones, with the exception of those compliance deadlines established in a TMDL, necessary to improve the effectiveness of the Storm Water Management Program, and may request a time schedule order if available. The Permittee shall identify Storm Water Management Program modifications to be revised in the Permittee's SWMP.

The Permittee may propose minor modifications to the Storm Water Management Program through changes to its Work Plan. Such minor modifications shall be submitted to the Executive Officer and shall become effective upon (1) approval by the Executive Officer, or (2) ninety (90) days after submittal if the Executive Officer expresses no objections.

G. Required Deliverables

The purpose of this provision is to set forth the reporting requirements that will document compliance with this Order. The goal of reporting is to communicate to the Central Valley Water Board and the people of the State the

implementation status of each Storm Water Management Program and compliance with the requirements of this Order. This goal is to be accomplished through the submittal of specific deliverables to the Central Valley Water Board by the Permittee.

1. Notice of Intent

The Permittee shall submit a complete NOI package in accordance with **Part V.B.1** or **Part V.B.2**, as applicable.

2. Storm Water Management Plans

The Permittee shall develop and submit a SWMP to the Central Valley Water Board for approval. The SWMP shall include the requirements described under **Parts V.A. and V.F.3**. The SWMP, including the RAA, shall be submitted in accordance with the following table:

**Table 3: Timeline for the Development of the
Storm Water Management Plan (SWMP)**

				Submitted As Soon As Possible, but No Later Than Existing Permittees		
Item		Submitted By	Submitted To	New Permittees	(After receipt of the NOA, resume the step in the process that was currently in progress)	
Notice of Intent and Prioritization Approach	1a.	Notice of Intent (NOI) & Preliminary Prioritization Approach	Permittee	Central Valley Water Board	In accordance with Part V.B.1 of this Order	In accordance with Part V.B.2 of this Order
	1b.	Notice of Applicability (NOA) & Approval of Preliminary Prioritization Approach	Central Valley Water Board	Permittee	After receipt of NOI (Item 1a)	Within 90 days after receipt of NOI (Item 1a) or as specified in an Executive Officer approval letter, whichever is later (if not previously submitted).
Assessment and Prioritization	2a.	Assessment & Prioritization Results, and Methodology Proposed for Reasonable Assurance Analysis (RAA)	Permittee	Central Valley Water Board	6 months after receipt of NOA (Item 1b)	6 months after receipt of NOA (Item 1b) or as specified in an Executive Officer approval letter, whichever is later (if not previously submitted)
	2b.	Meet and confer with Central Valley Water Board staff. Central Valley Water Board staff to provide comments to Permittee.	---	---	---	---

		Submitted As Soon As Possible, but No Later Than Existing Permittees			
	Item	Submitted By	Submitted To	New Permittees	(After receipt of the NOA, resume the step in the process that was currently in progress)
Strategies & Milestones	3a. Identify Strategies & Milestones and Run RAA	Permittee	Central Valley Water Board	12 months after receipt of comments from Central Valley Water Board (Item 2a/b)	12 months after receipt of comments from Central Valley Water Board (Item 2a/b) on the Assessment & Prioritization Results or as specified in an Executive Officer approval letter, whichever is later (if not previously submitted)
	3b. Meet and confer with Central Valley Water Board staff if requested by Central Valley Water Board staff. Central Valley Water Board to provide comments to Permittee or provides a written no objection statement.	---	---	---	---
Development of Storm Water	4a. Submittal of Draft SWMP	Permittee	Central Valley Water Board	6 months after receipt of comments or provides a written no objections statement from Central Valley	6 months after receipt of comments or provides a no written objections statement from Central Valley Water Board

GENERAL WASTE DISCHARGE REQUIREMENTS
MUNICIPAL SEPARATE STORM SEWER SYSTEMS

ORDER NO. R5-2026-0XXX
NPDES NO. CAS0085324

		Submitted As Soon As Possible, but No Later Than Existing Permittees			
Item		Submitted By	Submitted To	New Permittees	(After receipt of the NOA, resume the step in the process that was currently in progress)
				Water Board (Item 3a)	(Item 3a) or as specified in an Executive Officer approval letter, whichever is later.
4b.	Meet and confer with Central Valley Water Board staff. if requested by Central Valley Water Board staff. Central Valley Water Board to provide comments to Permittee or provides a written no objection statement.	---	---	---	---
4c.	Address any Central Valley Water Board comments and submit Final SWMP	Permittee	Central Valley Water Board	3 months after receipt of comments or provides a written no objections statement from Central Valley Water Board (Item 4a).	3 months after receipt of comments or provides a written no objections statement from Central Valley Water Board (Item 4a) or as specified in an Executive Officer approval letter, whichever is later).
4d.	Consideration of approval of SWMP	---	---	TBD	TBD

Submitted As Soon As Possible, but No Later Than Existing Permittees					
Item	Submitted By	Submitted To	New Permittees	(After receipt of the NOA, resume the step in the process that was currently in progress)	
	by Central Valley Water Board				

3. Trash Implementation Plan

Attachment N requires Permittees who select Track 2 to submit a Trash Implementation Plan (TIP). Unless otherwise specified in **Attachment N**, any plans and/or reports required by **Attachment N** shall be submitted to the Central Valley Water Board separately from the SWMP. Permittees that have submitted a TIP to the Central Valley Water Board or State Water Board in response to the 1 June 2017 issued California Water Code Section 13383 Order to Submit Method to Comply with Statewide Trash Provisions are approved upon the adoption of this Order and shall continue implementing the TIP.

4. Pyrethroids Control Program

A Pyrethroid Management Plan required by the 13 July 2020 *Order to Submit Technical and Monitoring Reports Pursuant to California Water Code Sections 13267 and 13383* may be submitted with the SWMP.

5. Annual Cost Report

The Permittee shall submit an Annual Cost Report via the State Water Board MS4 Cost Data Portal that complies with the State Water Board's *Water Quality Control Policy for Standardization of Cost Reporting in Municipal Stormwater Permits*, adopted January 22, 2025.

6. Work Plan

The Permittee shall develop a five (5) year Work Plan to be submitted as a companion document to the SWMP. The Work Plan must identify the specific, detailed tasks and a timeline that a Permittee performs in order to implement the strategies and activities in its SWMP. The Permittee shall review the Work Plan on an annual basis to determine if any modifications are necessary in order to effectively implement the Storm Water Management Program and TIP, including achievement of identified milestones. The Work Plan may be modified during the Annual Reporting process. The Work Plan and modifications to the Work Plan are subject to Central Valley Water Board

Executive Officer review and approval. If the Executive Officer has not objected within ninety (90) days from submission, the Work Plan must be implemented as proposed.

7. Annual Reports

- a. The Permittee shall submit an Annual Report and Trash Implementation Annual Report for each reporting period no later than **15 November** of each permit year. The Annual Report shall include:
 - i. A statement certifying that the Storm Water Management Program and Work Plan were implemented as approved;
 - ii. A summary of activities and tasks scheduled to be implemented in the upcoming year. If the Work Plan is still being implemented as described from the previous year, the Permittee may refer to the Work Plan;
 - iii. Any proposed minor modifications to the Storm Water Management Program; or any proposed Work Plan Modification; and
 - iv. A completed certification statement, in accordance with the signatory requirements in **Attachment H** (*Standard Permit Provisions and General Provisions*).
- b. The Annual Report covers activities for the previous fiscal year for the reporting period of July 1 through June 30.
- c. If the Permittee collects monitoring data, the Permittee shall provide the collected monitoring data or documentation required under this Order to the Central Valley Water Board. Any collected monitoring data shall be uploaded to the California Environmental Data Exchange Network (CEDEN)⁴³, or the Storm Water Multi-Application Reporting and Tracking System (SMARTS) database when available.
- d. Additional requirements described in 40 CFR 122.42(c) (**Attachment H**, *Standard Permit Provisions and General Provisions*) are hereby incorporated into this Order by reference.

The Trash Implementation Annual Report requirements are specified in **Attachment N**.

8. Mid-Term and End-Term Reports

The Permittee shall develop and submit a Mid-term and an End-Term Report to the Central Valley Water Board, or via SMARTS database when available. The Mid-Term Report shall be submitted by **15 November** within three (3) years from the date of the NOA issued under Order R5-2016-0040 or three (3) years after the last End-Term Report, whichever is sooner. The End-Term Report shall be submitted by **15 November** within five (5) years from the date

⁴³ Data must be uploaded to CEDEN using the templates provided on the CEDEN website.

of the NOA issued under Order R5-2016-0040 or five (5) years after the last End-Term Report, whichever is sooner. The Mid-Term and End-Term Reports shall serve as the Annual Report for the years submitted.

Once a SWMP is approved, the Mid-Term and End-Term Reports reporting cycle shall reset so that the Mid-Term and End-Term Reports shall be submitted by **15 November** three (3) and five (5) years, respectively, from the year the SWMP is approved.

The Mid-Term and End-Term Reports shall include the following:

- a. Cumulative summary of Storm Water Management Program activities conducted by the Permittee;
- b. Status of progress towards attainment of SWMP and trash implementation milestones and implementation of strategies, and activities. If any SWMP and/or trash implementation milestones or final dates for attainment were not met, the Permittee shall provide detailed explanations;
- c. Cumulative summary of the monitoring data including:
 - All physical, chemical, and biological monitoring data collected to date; and
 - Data analytical results⁴⁴ and recommendations to modify the Permittee's monitoring approach.
- d. A short-term Storm Water Management Program effectiveness assessment as described in **Part V.F.5** for the Mid-Term report and results from the monitoring assessment required under **Part V.F.1** of this Order.
- e. A long-term Storm Water Management Program effectiveness assessment as described in **Part V.F.5** for the End-Term report and results from the monitoring assessment required under **Part V.F.1** of this Order.
- f. The progress in implementing the Work Plan submitted with the SWMP, including but not limited to results or findings regarding the following:
 - The progress toward achieving the interim and final goals for the PWQCs for the Jurisdictional Runoff Area,
 - The water quality improvement strategies that were implemented and/or no longer implemented by each of the Permittees during the

⁴⁴The Permittee shall provide any collected monitoring data or documentation required under this Order to the Central Valley Water Board. Any collected monitoring data shall be uploaded to the California Environmental Data Exchange Network (CEDEN), or the Storm Water Multi-Application Reporting and Tracking System (SMARTS) database when available.

reporting period and previous reporting periods, and are planned to be implemented during the next reporting period,


Proposed modifications to the water quality improvement strategies, and the rationale for the proposed modifications,

Approved modifications or updates incorporated into the Permittee's SWMP and implemented by the Permittee in the Jurisdictional Runoff Area, and


Any other proposed modifications or updates to the Permittee's SWMP.

- g. A fiscal analysis. This analysis shall, for each fiscal year covered by the report, identify the expenditures spent on the implementation of the SWMP. This requirement shall be met through the submittal of the Annual Cost Report in **Part V.G.5**.
- h. A completed certification statement, in accordance with the signatory requirements in **Attachment H** (*Standard Permit Provisions and General Provisions*).
- i. Any other applicable requirements under 40 CFR 122.42(c) (see **Attachment H**, *Standard Permit Provisions and General Provisions*) not already reflected in **Part V.G.8**.

ATTACHMENT A – STORM WATER MANAGEMENT FRAMEWORK

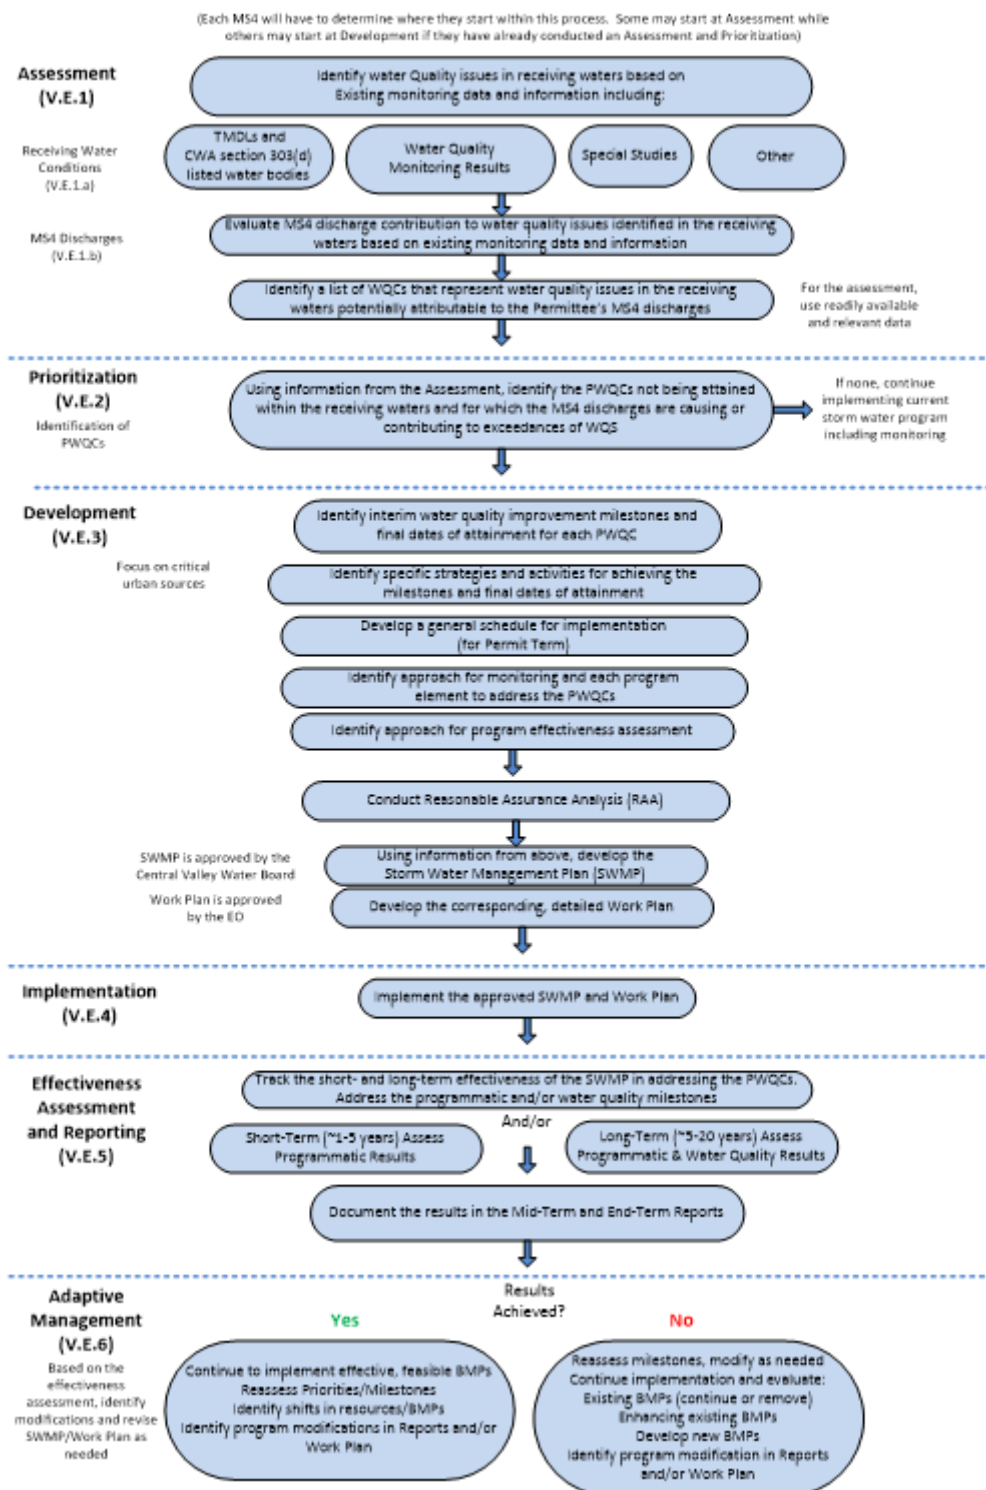

ATTACHMENT B – RELATIONSHIP BETWEEN ORDER R5-2026-0XXX, STORM WATER MANAGEMENT PLAN (SWMP) AND WORK PLAN, AND REPORTS

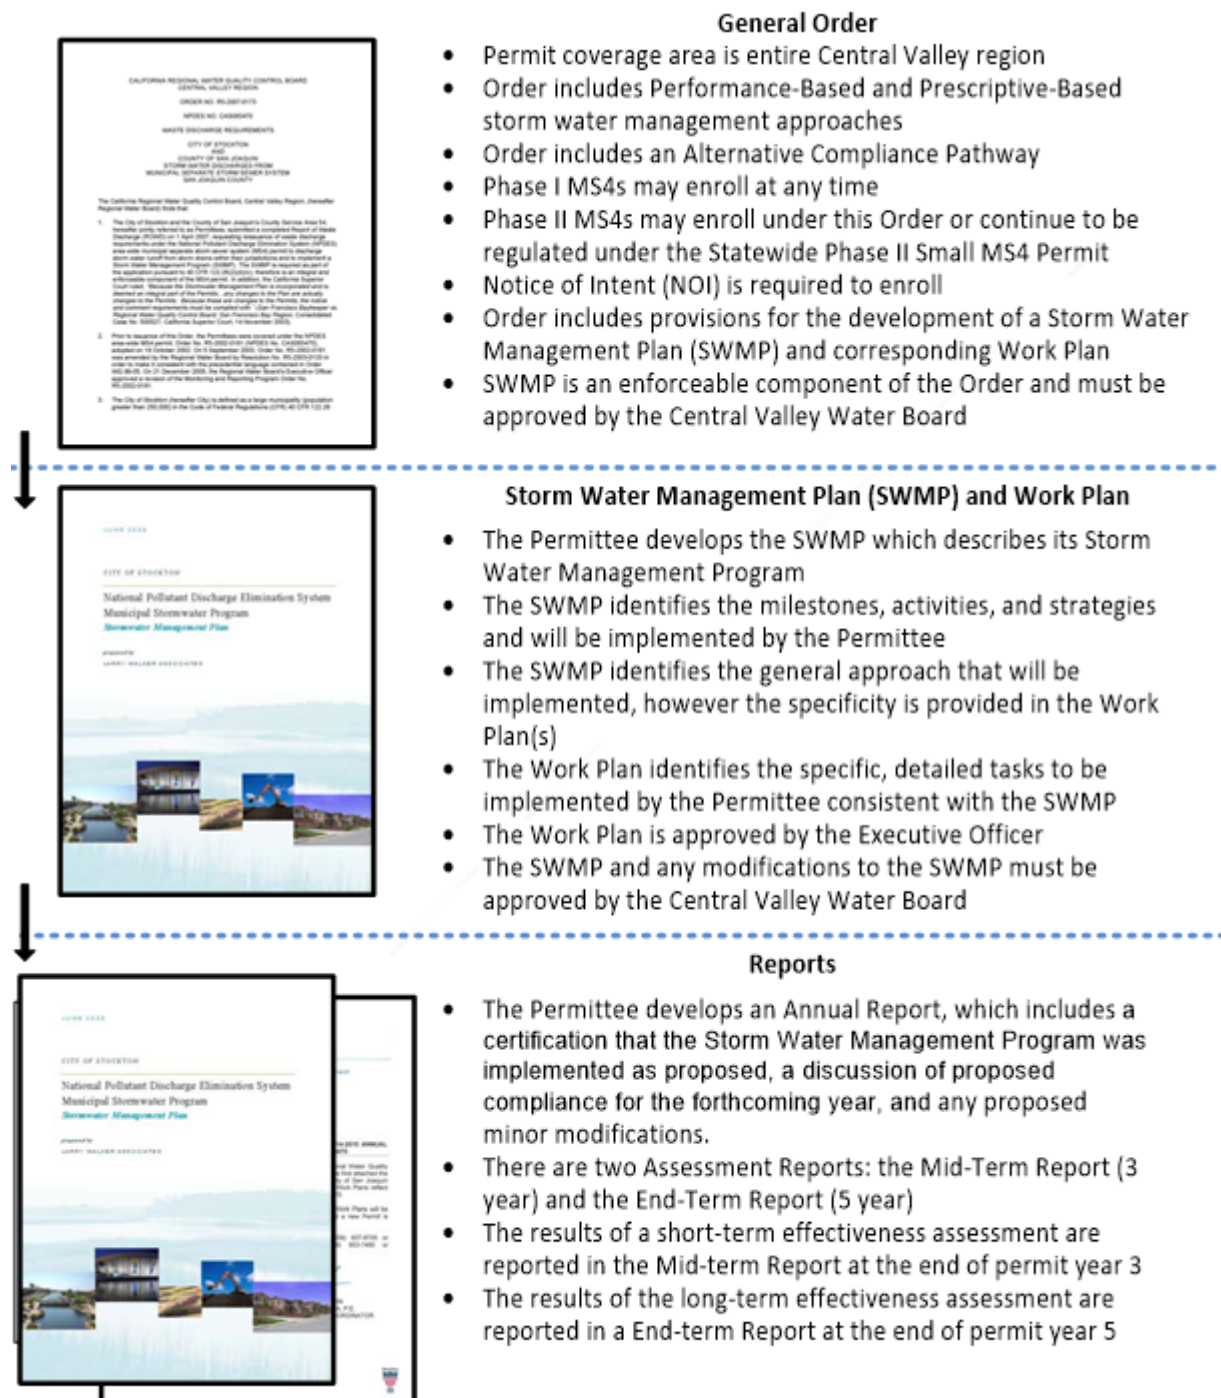

ATTACHMENT C – Acronyms, Abbreviations, and Definitions

ACRONYMS AND ABBREVIATIONS

Basin Plan	<i>Water Quality Control Plan for the Sacramento and San Joaquin River Basins or Water Quality Control Plan for the Tulare Lake Basin</i>
Bay-Delta Plan	<i>Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary</i>
BMP	Best Management Practice
BPTC	Best Practicable Treatment or Control
CEDEN	California Environmental Data Exchange Network
Central Valley Water Board	California Regional Water Quality Control Board, Central Valley Region
CEQA	California Environmental Quality Act
CESA	California Endangered Species Act
CFR	Code of Federal Regulations
CGP	Construction General Permit
CIWQS	California Integrated Water Quality System
CTR	California Toxics Rule
CWA	Clean Water Act
Ep	Erosion Potential
FCSE	Full Capture System Equivalency
ESCP	Erosion and Sediment Control Plan
FESA	Federal Endangered Species Act
FR	Federal Register
General Permit	Order R5-2026-0XXX
GIS	Geographic Information System

Govt Code	California Government Code
HMP	Hydromodification Management Plan
IBI	Index of Biological Integrity
IC/ID	Illegal Connection and Illicit Discharge Elimination
IPM	Integrated Pest Management
IWC	Instream Waste Concentration
LID	Low Impact Development
MRP	Monitoring, Assessment, and Reporting Program
MCL	Maximum Contaminant Level
MEP	Maximum Extent Practicable
MRP	Monitoring and Reporting Program
MS4	Municipal Separate Storm Sewer System
NAICS	North American Industry Classification System
NOA	Notice of Applicability
NOI	Notice of Intent
NOT	Notice of Termination
NPDES	National Pollutant Discharge Elimination System
NTR	National Toxics Rule
PLU	Priority Land Uses
POTW	Publicly Owned Treatment Works
PRC	Public Resources Code
PWQC	Priority Water Quality Constituents
QA/QC	Quality Assurance/Quality Control
QAPP	Quality Assurance Project Plan
QSD	Qualified SWPPP Developer

QSP	Qualified SWPPP Practitioner
RAA	Reasonable Assurance Analysis
RMP	Regional Monitoring Program
SSC	Suspended Sediment Loads
SIC	Standard Industrial Classification
SMARTS	Storm Water Multi-Application, Reporting, and Tracking System
SSO	Sanitary Sewer Overflow
State Water Board	State Water Resources Control Board
SUSMP	Standard Urban Stormwater Mitigation Plan
SWAMP	Surface Water Ambient Monitoring Program
SWMP	Storm Water Management Plan
SWPPP	Storm Water Pollution Prevention Plan
TBEL	Technology Based Effluent Limitation
TMDL	Total Maximum Daily Load
USEPA	United States Environmental Protection Agency
USC	United States Code
USGS	United States Geological Survey
WLA	Waste Load Allocations
WDR	Waste Discharge Requirements
WQBEL	Water Quality Based Effluent Limitation
WQC	Water Quality Constituents
WQF	Water Quality Flow
WQS	Water Quality Objective or Water Quality Standard
WQV	Water Quality Volume

DEFINITIONS⁴⁵

Acute Aquatic Toxicity Test – A test to determine an adverse effect (usually lethally) on a group of aquatic test organisms during a short-term exposure (e.g., 24, 48, or 96 hours).

Adverse Impact - A detrimental effect upon water quality or beneficial uses caused by a discharge of a pollutant or pollutants.

Annual Report – An Annual Report is required to be submitted no later than 15 November of each permit year. The Annual Report must contain information regarding compliance with implementation of the SWMP during the reporting period (July 1 through June 30).

Anti-degradation Policy – *Statement of Policy with Respect to Maintaining High Quality Waters in California* (State Water Board Resolution No. 68-16) is California's anti-degradation policy, as required in 40 CFR § 131.12.

Aquatic Life – Aquatic life refers to aquatic organisms.

Arithmetic Mean (μ) - Also called the average, is the sum of measured values divided by the number of samples. For ambient water concentrations, the arithmetic mean is calculated as follows:

Arithmetic mean = $\mu = \sum x/n$, where:

$\sum x$ is the sum of the measured ambient water concentrations, and n is the number of samples.

Authorized Discharge - Any discharge that is authorized pursuant to a NPDES permit or meets the conditions set forth in this Order.

Authorized Non-Storm Water Discharge - Discharges that are not composed entirely of storm water and that are: (1) separately regulated by an individual or general NPDES permit and allowed to discharge to the MS4 in compliance with all NPDES permit conditions (2) listed as a category in 40 CFR 122.26(d)(2)(iv)(B)(1) and the discharge is not determined to contain pollutants by the Permittee or Executive Officer; or (3) necessary for emergency responses purposes, including flows from emergency firefighting activities.

Automotive Service Facilities – A facility that is categorized in any one of the following Standard Industrial Classification (SIC) codes. (5013, 5014, 5511, 5541, 7532-7534 and

⁴⁵ Terms not defined in this **Attachment C** shall have the meaning prescribed in the federal Clean Water Act, as amended, and the Clean Water Act's applicable regulations (collectively, the "CWA") or the Porter-Cologne Water Quality Control Act, (California Water Code § 13000 et seq.). Any terms in this Order not defined in **Attachment C**, the CWA, or the California Water Code shall have their ordinary meaning.

7536-7539) For inspection purposes, Permittees need not inspect facility with SIC codes 5013, 5014, 5511, 5541, provided that these facilities have not outside activities or materials that may be exposed to storm water.

Basin Plan – The *Water Quality Control Plan for the Sacramento-San Joaquin River Basins* (April 2016), or *Water Quality Control Plan for the Tulare Lake Basin* (January 2015), and subsequent revisions or amendments.

Bay-Delta Plan – The *Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary* (Revised December 2006), and subsequent revisions or amendments.

Beneficial Uses - The uses of water necessary for the survival or wellbeing of man, plants, and wildlife. These uses of water serve to promote tangible and intangible economic, social, and environmental goals. “Beneficial Uses” of the waters of the State that may be protected include, but are not limited to, domestic, municipal, agricultural and industrial supply; power generation; recreation; aesthetic enjoyment; navigation; and preservation and enhancement of fish, wildlife, and other aquatic resources or preserves. Existing beneficial uses are uses that were attained in the surface or ground water on or after November 28, 1975; and potential beneficial uses are uses that would probably develop in future years through the implementation of various control measures. “Beneficial Uses” are equivalent to “Designated Uses” under federal law. [Water Code section 13050(f)].

Best Management Practices (BMPs) - Schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce pollutants discharged to waters of the United States [40 CFR 122.2].

Bioassessment - The use of biological community information to evaluate the biological integrity of a water body and its watershed. With respect to aquatic ecosystems, bioassessment is the collection and analysis of samples of the benthic macroinvertebrate community together with physical/habitat quality measurements associated with the sampling site and the watershed to evaluate the biological condition (i.e. biotic integrity) of a water body.

Catch Basin - A catch basin (also known as a storm drain inlet) is an inlet to the storm drain system that typically includes a grate or curb inlet where water enters the catch basin and a sump to capture sediment, debris and associated pollutants.

Certified Trash Full Capture System – A trash control system that is certified by the State Water Board Executive Director or designee that traps particles 5-millimeters or greater. A certified trash full capture system includes both certified trash treatment control systems and Categorically Certified Multi-Benefit Systems. Other than Categorically Certified Multi-Benefit Systems, when certifying trash treatment control systems, the State Water Board Executive Director designates the systems as either “Catch basin Inserts and Other Insert Systems” or “High Flow Capacity Trash Full Capture Systems.” Other designations may be certified as necessary and appropriate, such as project-specific certified trash control systems.

Certified Full Capture Systems have a design treatment capacity that is either:

- a) Not less than the peak flow rate, Q , resulting from a one-year, one-hour, storm in the subdrainage area discharging to the Certified Full Capture System, or
- b) Designed and sized to carry at least the same flows as, the corresponding storm drain system into the Certified Trash Full Capture system that carries less than the peak flow rate, Q , resulting from a one-year, one-hour storm in the subdrainage area discharging into the Certified Trash Full Capture System.

The Rational Equation is used to compute the peak flow rate: $Q = C \times I \times A$, where Q = design flow rate (cubic feet per second, cfs); C = runoff coefficient (dimensionless); I = design rainfall intensity (inches per hour, as determined per the rainfall isohyetal map based on location of the drainage area and historic rainfall data, and A = subdrainage area (acres) discharging to the Certified Trash Full Capture System.

With approval of the Central Valley Water Board Executive Officer, an alternative hydraulic calculation methods or models to determine flow rates (Q) to size Trash Full Capture Systems in situations where it can be demonstrated that the Rational Method is inappropriate or the underlying assumptions are false (e.g., in large drainage areas greater than 200 acres, drainage areas with variable slopes, or other complexities) may be used.

Chronic Toxicity – A measurement of sub-lethal effect (e.g. reduced growth, reproduction) to experimental test organisms exposed to an effluent or receiving waters compared to that of the control organisms.

Clean Water Act Section 303(d) Water Body - An impaired water body in which water quality does not meet applicable water quality standards and/or is not expected to meet water quality standards, even after the application of technology-based pollution controls required by the CWA. Discharges to these water bodies can cause or contribute to violations of applicable water quality standards.

Commercial Development – Any development on private land that is not heavy industrial or residential. The category includes, but is not limited to: restaurants, stores, hospitals, laboratories and other medical facilities, recreational facilities, plant nurseries, car wash facilities; mini-malls and other business complexes, shopping malls, hotels, office buildings, public warehouses and other light industrial complexes.

Construction Activity – Construction activity includes any construction or demolition activity, clearing, grading, grubbing, or excavation or any other activity that results in land disturbance. Construction does not include emergency construction activities required to immediately protect public health and safety or routine maintenance activities required to maintain the integrity of structures by performing minor repair and restoration work, maintain the original line and grade, hydraulic capacity, or original purposes of the facility. See “Routine Maintenance” definition for further explanation. Where clearing, grading or excavating of underlying soil takes place during a repaving

operation, coverage under the State Water Board's General Construction Permit is required if more than one (1) acre is disturbed or the activities are part of a larger plan.

Contamination - As defined in the Porter-Cologne Water Quality Control Act, contamination is "an impairment of the quality of waters of the State by waste to a degree which creates a hazard to the public health through poisoning or through the spread of disease. 'Contamination' includes any equivalent effect resulting from the disposal of waste whether or not waters of the State are affected."

Contribute – Discharging a pollutant that measurably affects an exceedance or excursion of an applicable water quality objectives or standards (collectively, "WQS").

Designated Land Uses – Specific land uses or locations outside of Priority Land Uses that the Central Valley Water Board determines generate substantial amounts of Trash (see Chapter IV.A.3.d of the Trash Provisions). Pursuant to the Trash Amendments, the Central Valley Water Board may determine that other specific land uses or locations generate substantial amounts of trash and the time schedule for full compliance at these specific land uses or locations. In no case may the final compliance date be later than ten (10) years from the determination.

Development – Any construction, rehabilitation, redevelopment, or reconstruction of any public or private residential project (whether single-family, multi-unit or planned unit development); industrial, commercial, retail and other non-residential projects, including public agency projects; or mass grading for future construction. It does not include routine maintenance to maintain original line and grade, hydraulic capacity, or original purpose of facility, nor does it include emergency construction activities required to immediately protect public health and safety.

Discharge - When used without qualification the "discharge of a pollutant."

Direct Discharge – A discharge that is routed directly to waters of the United States by means of pipe, channel, or ditch (including a municipal storm sewer system), or through surface runoff.

Discharge of a Pollutant – The addition of any "pollutant" to waters of the United States from any point source. The term *discharge* includes additions of pollutants into waters of the United States from surface runoff which is collected or channeled by man; discharges through pipes, sewers, or other conveyances owned by a State, municipality, or other person which do not lead to a treatment works; and discharges from pipes, sewers, or other conveyances, leading into privately owned treatment works.

Discharger – Any responsible party or site owner or operator within the Permittee's Jurisdictional Runoff Area whose site discharges storm water runoff or a non-storm water discharge.

Disturbed Area – An area that is altered as a result of clearing, grading, and/or excavation.

Dry Weather – Weather is considered dry if the preceding 72 hours has been without measurable precipitation (0.1 inches or less accumulated over previous 24-hours).

Endpoint – A measured response of a receptor to a stressor. An endpoint can be measured in a toxicity test or field survey.

Equivalent Alternate Land Uses – An MS4 Permittee with regulatory authority over priority land uses may issue a request to the Central Valley Water Board that the MS4 Permittee be allowed to substitute one or more land uses identified under Priority Land Uses with alternate land uses within the MS4 Permittee’s jurisdiction that generates rates of trash that is equivalent to or greater than the priority land use(s) being substituted. The land use area requested to substitute for a priority land use need not be an acre-for-acre substitution but may involve one or more priority land uses, or a fraction of a priority land use, or both, provided the total trash generated in the equivalent alternative land use is equivalent to or greater than the total trash generated from the priority land use(s) for which substitution is requested. Comparative trash generation rates shall be established through the reporting of quantification measures such as street sweeping and catch basin cleanup records; mapping; visual trash presence surveys, such as the “Keep America Beautiful Visible Litter Survey”; or other information as required by the Central Valley Water Board.

Erosion –The physical detachment of soil due to wind or water. Often the detached fine soil fraction becomes a pollutant transported by storm water runoff. Erosion occurs naturally but can occur at an accelerated rate by land clearing activities such as farming, development, road building, and timber harvesting.

Erosion and Sediment Control Plan (ESCP) – A set of plans prepared by or under the direction of a licensed professional engineer indicating the specific measures and sequencing to be used to control sediment and erosion on a development site during and after construction.

Executive Officer – Except where specifically noted otherwise, “Executive Officer” shall mean the Executive Officer of the Regional Water Quality Control Board, Central Valley Region.

Existing Development – Any area that has been developed and exists for municipal, commercial, industrial, or residential purposes, uses, or activities. May include areas that are not actively used for its originally developed purpose but may be re-purposed or redeveloped for another use or activity.

Existing Permittee – A Permittee enrolling in this Order that was previously enrolled in Order R5-2016-0040.

Full Capture System Equivalency – The trash load that would be reduced if full capture systems were installed, operated, and maintained for all storm drains that capture runoff from the relevant areas of land (priority land uses, facilities or sites regulated by NPDES permits for discharges of storm water associated with industrial activity, or specific land uses or areas that generate substantial amounts of trash, as

applicable). The full capture system equivalency is a trash load reduction target that the Permittee quantifies by using an approach, and technically acceptable and defensible assumptions and methods for applying the approach, subject to Central Valley Water Board approval. Examples of such approaches include, but are not limited to, the following:

- (1) **Trash Capture Rate Approach.** Directly measure or otherwise determine the amount of trash captured by full capture systems for representative samples of all similar types of land uses, facilities, or areas within the relevant areas of land over time to identify specific trash capture rates. Apply each specific trash capture rate across all similar types of land uses, facilities, or areas to determine full capture system equivalency. Trash capture rates may be determined either through a pilot study or literature review. Full capture systems selected to evaluate trash capture rates may cover entire types of land uses, facilities, or areas, or a representative subset of types of land uses, facilities, or areas.

With this approach, full capture system equivalency is the sum of the products of each type of land use, facility, or area multiplied by trash capture rates for that type of land use, facility, or area.

- (2) **Reference Approach.** Determine the amount of trash in a reference receiving water in a reference watershed where full capture systems have been installed for all storm drains that capture runoff from all relevant areas of land. The reference watershed must be comprised of similar types and extent of sources of trash and land uses (including priority land uses and all other land uses), facilities, or areas as the Permittee's watershed. With this approach. Full capture system equivalency would be demonstrated when the amount of trash in the receiving water is equivalent to the amount of trash in the reference receiving water.

Grading - The cutting and/or filling of the land surface to a desired slope or elevation.

Hazardous Material – Any substance that poses a threat to human health or the environment due to its toxicity, corrosiveness, ignitability, explosive nature or chemical reactivity. These also include materials named by the USEPA in 40 CFR 116 to be reported if a designated quantity of the material is spilled into the waters of the United States or emitted into the environment.

Hazardous Waste – Hazardous waste is defined as “any waste which is required to be managed according to Chapter 30 of Division 4.5 of Title 22 of the California Code of Regulations” [Cal. Code Regs., tit. 22, § 66261.3].

Household Hazardous Waste – Paints, cleaning products, and other wastes generated during home improvement or maintenance activities.

Hydromodification – The change in the natural watershed hydrologic processes and runoff characteristics (e.g., interception, infiltration, overland flow, and groundwater flow)

caused by urbanization or other land use changes that result in increased stream flows and sediment transport. In addition, alteration of stream and river channels, such as stream channelization, concrete lining, installation of dams and water impoundments, and excessive streambank and shoreline erosion are also considered hydromodification, due to their disruption of natural watershed hydrologic processes. For the purposes of this Order, “hydromodification” refers to ecologically significant modification of a watershed’s natural hydrograph, characterized by increased volume, velocity, rate, duration, and/or overall energy (collectively, “flow”).

Illegal Connection – Any physical connection to a Permittee’s MS4 that is not permitted pursuant to a valid NPDES permit and/or written approval by the Permittee.

Illicit Discharge - Any discharge to the MS4 that is not composed entirely of storm water except discharges pursuant to a NPDES permit and non-storm water discharges, such as those resulting from firefighting activities [40 CFR 122.26(b)(2)].

Impaired Water Body - A water body (e.g., stream reaches, lakes, water body segments) with chronic or recurring monitored violations of the applicable numeric and/or narrative water quality criteria. An impaired water is a water body that has been listed on the State of California’s CWA section 303(d) list or has not yet been listed but otherwise meets the criteria for listing per the [Listing Policy](http://www.waterboards.ca.gov/water_issues/programs/tmdl/docs/ffed_303d_listingpolicy093004.pdf) found at: (http://www.waterboards.ca.gov/water_issues/programs/tmdl/docs/ffed_303d_listingpolicy093004.pdf). The State of California’s [CWA section 303\(d\) list](https://www.waterboards.ca.gov/water_issues/programs/water_quality_assessment/2020_2022_integrated_report.html) can be found at (https://www.waterboards.ca.gov/water_issues/programs/water_quality_assessment/2020_2022_integrated_report.html).

Impervious Surface - A surface covering or pavement of a developed parcel of land that prevents the land’s natural ability to absorb and infiltrate rainfall/storm water. Impervious surfaces include but are not limited to; roof tops, walkways, patios, driveways, parking lots, storage areas, impervious concrete and asphalt, and any other continuous watertight pavement or covering. Landscaped soil and pervious pavement, including pavers with pervious openings and seams, underlain with pervious soil or pervious storage material, such as a gravel layer sufficient to hold the specified volume of rainfall runoff are not impervious surfaces.

Industrial/Commercial Facility – Any facility involved and/or used in the production, manufacture storage, transportation, distribution, exchange or sale of goods and/or commodities, and any facility involved and/or used in providing professional and non-professional services. This category of facilities includes, but is not limited to, any facility defined by either the SIC or the NAICS. Facility ownership (federal, state, municipal, private) and profit motive of the facility are not factors in this definition.

Infiltration – The entry of water into the surface of the soil.

Institutional Controls – Non-structural best management practices (i.e., no structures are involved) that may include, but not limited to, street sweeping, sidewalk trash bins, collection of the trash, anti-litter educational and outreach programs, producer take-back for packaging, and ordinances.

Instream Waste Concentration (IWC) – The concentration of effluent in the receiving water after mixing as determined by the Central Valley Water Board. For assessing whether receiving waters meet the numeric water quality objectives, the undiluted ambient water shall be used as the IWC in the Test of Significant toxicity described in the State Water Board's State Policy for Water Quality Control: Toxicity Provisions, adopted 1 December 2020 and revised 5 October 2021.

Integrated Pest Management (IPM) – An ecosystem-based strategy that focuses on long-term prevention of pests or their damage through a combination of techniques such as biological control, habitat manipulation, modification of cultural practices, and use of resistance varieties.

Jurisdictional Runoff Area – Urbanized areas with an MS4 conveyance within the Permittee's jurisdiction and subject to the requirements of this Order. A Permittee's Jurisdictional Runoff Area does not include areas within the Permittee's geographical jurisdiction that drain to a MS4 that is owned or operated by another NPDES permit holder.

Low Impact Development (LID) – A storm water management and land development strategy that emphasizes conservation and the use of on-site natural features integrated with engineered, small-scale hydrologic controls to more closely reflect pre-project hydrologic functions. LID includes land development strategies that emphasize conservation and the use of on-site natural features integrated with engineered, small-scale hydrologic controls to more closely reflect pre-project hydrologic functions. LID strategies include retention practices that do not allow runoff, such as infiltration, rainwater harvesting and use, and evapotranspiration.

Low Impact Development Controls – Post-construction controls or combinations of systems that employ natural and constructed features that reduce the rate of storm water runoff, filter out pollutants, facilitate storm water storage onsite, infiltrate storm water into the ground to replenish groundwater supplies, or improve the quality of receiving groundwater and surface water. (See Wat. Code, § 10564.) LID Controls do not include stormwater treatment controls that solely filter out pollutants

Maximum Extent Practicable (MEP) – The technology-based standard for implementation of municipal storm water management programs to reduce pollutants in storm water. Clean Water Act section 402(p)(3)(B)(iii) requires that municipal permits "shall require controls to reduce the discharge of pollutants to the maximum extent practicable, including management practices, control techniques and system, design and engineering methods, and such other provisions as the Administrator or the State determines appropriate for the control of such pollutants." MEP is the cumulative effect of implementing, evaluating, and making corresponding changes to a variety of technically appropriate and economically feasible BMPs, ensuring that the most appropriate controls are implemented in the most effective manner. To achieve the MEP standard, municipalities must employ whatever BMPs are technically feasible and are not cost-prohibitive. Reducing pollutants to the MEP means choosing effective BMPs and rejecting applicable BMPs only where other effective BMPs will serve the same purpose, or the BMPs would not be technically feasible, or the costs would be

prohibitive. A final determination of whether a municipality has reduced pollutants to the MEP can only be made by the State or Central Valley Water Board.

In 2000, the State Water Board issued a precedential order (Order WQ 2000-11 (*Cities of Bellflower*, et al.)) stating that cost of compliance with the programs and requirements of a municipal storm water permit is a relevant factor in determining MEP, but that a cost benefit analysis is not required. The State Water Board discussed costs as follows:

While the standard of MEP is not defined in the storm water regulations or the Clean Water Act, the term has been defined in other federal rules. These definitions focus mostly on technical feasibility, but cost is also a relevant factor. There must be a serious attempt to comply, and practical solutions may not be lightly rejected. If, from the list of BMPs, a Permittee chooses only a few of the least expensive methods, it is likely that MEP has not been met. On the other hand, if a Permittee employs all applicable BMPs except those where it can show that they are not technically feasible in the locality, or whose cost would exceed any benefit to be derived, it would have met the standard. MEP requires Permittees to choose effective BMPs, and to reject applicable BMPs only where other effective BMPs will serve the same purpose, the BMPs would not be technically feasible, or the cost would be prohibitive. Thus, while cost is a factor, the Central Valley Water Board is not required to perform a cost-benefit analysis.

(State Water Board Order WQ 2000-11, p.20.). The cost of complying with TMDL waste load allocations is not required to be considered because TMDLs are not subject to the MEP standard.

Monitoring Year – October 1 to September 30.

MS4 Cost Data Portal – Cost submittal portal developed the State Water Board to allow a Permittee to report their annual expenditures for MS4- Permit implementation activities.

Multi-Benefit Project – A project designed to achieve any of the benefits set forth in section 10652, subdivision (d) of the Water Code. Examples include projects designed to: infiltrate, recharge, or store storm water for beneficial reuse; develop or enhance habitat and open space through storm water and non-storm water management; and/or reduce storm water and non-storm water runoff volume.

Municipal Separate Storm Sewer System (MS4) – A conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains): (i) Owned or operated by a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law) having jurisdiction over disposal of industrial wastes, storm water, or other wastes, including special districts under State law such as a sewer district, flood control district or drainage district, or similar entity, or designated and approved management agency under section 208 of the CWA that discharges to

waters of the United States; (ii) Designated or used for collecting or conveying storm water; (iii) Which is not a combined sewer; (iv) Which is not part of the Publicly Owned Treatment Works (POTW) as defined at 40 CFR section 122.2; all separate storm sewer that are defined as “large” or “medium” or “small” municipal separate storm sewer systems pursuant to paragraphs 40 CFR section 122.26 (b)(4), (b)(7), or (b)(16), or are designated under [40 CFR §122.26(a)(1)(v)].

National Pollutant Discharge Elimination System (NPDES) – The national program for issuing, modifying, revoking and reissuing, terminating, monitoring and enforcing permits, and imposing and enforcing pretreatment requirements, under sections 307, 402, 318, and 405 of CWA [40 CFR 122.2].

Natural Drainage System – A natural drainage system is a drainage system that has not been improved (e.g., channelized or armored). The clearing or dredging of a natural drainage system does not cause the system to be classified as improved.

New Development – Land disturbing activities; structural development, including construction or installation of a building or structure, creation of impervious surfaces; and land subdivision.

New Permittee – A Permittee enrolling in this Order that was not previously enrolled in Order R5-2016-0040.

Nonpoint Source – Any source of water pollution that does not meet the legal definition of “point source” in section 40 CFR 122.22 or section 502(14) of the Clean Water Act.

Non-Storm Water - All discharges into and from a MS4 that do not originate from precipitation events (i.e., all discharges from a MS4 other than storm water). Non-storm water includes illicit discharges and NPDES permitted discharges.

Non-Water Quality Milestone – A performance benchmark for a Permittee’s discharges indicating progress toward final attainment of a water quality standard in receiving waters, but which is not related to the quality of the Permittee’s discharge or of receiving waters. Examples may include, but are not limited to, obtaining budgetary approval from a City Council, other financing, or obtaining entitlements for a capital improvement project that ultimately will reduce the Permittee’s contribution of pollutants to waters of the United States. Achievement or non-achievement of a non-water quality milestone must be readily verifiable, and a date for its achievement must be specified.

Typically, non-water quality milestones should be among the earliest benchmarks achieved by a Permittee for a given PWQC, as they facilitate later steps that achieve actual pollutant reductions in receiving waters. Although a Permittee’s non-water quality milestones in a board-approved SWMP are enforceable components of this Order, the procedure for remaining in compliance with this Order despite missing a deadline is different for non-water quality milestones than it is for water quality milestones, as described in **Parts V.C.5 and V.C.8** of this Order.

Nuisance - Anything which meets all of the following requirements: 1) Is injurious to health, or is indecent, or offensive to the senses, or an obstruction to the free use of property, so as to interfere with the comfortable enjoyment of life or property; 2) Affects at the same time an entire community or neighborhood, or any considerable number of persons, although the extent of the annoyance or damage inflicted upon individuals may be unequal; and 3) Occurs during, or as a result of, the treatment or disposal of wastes [Water Code section 13050(m)].

Order – Unless otherwise specified, refers to this Order, Order R5-2026-0XXX (NPDES No. CAS0085324).

Outfall – A point source as defined in 40 CFR section 122.2 at the point where a municipal separate storm sewer discharges to waters of the United States but does not include open conveyances connecting two municipal separate storm sewers, or pipes, tunnels, or other conveyances that connect segments of the same stream or other waters of the United States and are used to convey waters of the United States [40 CFR § 122.26(b)(9)].

Parking Lot - Land area or facility for the parking or storage of motor vehicles used for business, commerce, industry, or personal use, with a lot size of 5,000 square feet or more of surface area, or with 25 or more parking spaces.

Percent Effect – The value that denotes the difference in response between the test concentration and the control, divided by the mean control response, and multiplied by 100.

Permittee – A discharger enrolled under this Order as being responsible for permit requirements within its Jurisdictional Runoff Area.

Point Source - Any discernible, confined, and discrete conveyance, including, but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection systems, vessel, or other floating craft from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture or agricultural storm water runoff [40 CFR § 122.2; CWA section 502(14)].

Pollutant - Dredged spoil, solid waste, incinerator residue, sewage, garbage, sewage sludge, munitions, chemical wastes, biological materials, radioactive materials (except those regulated under the Atomic Energy Act of 1954, as amended (42 USC § 200, *et seq.*), heat, wrecked or discarded equipment, rock, sand, cellar dirt and industrial, municipal, and agricultural waste discharged into water [CWA section 502(6)].

Pollution - The alteration of the quality of the waters of the State by waste, to a degree that unreasonably affects either of the following: 1) The waters for beneficial uses; or 2) Facilities that serve these beneficial uses; Pollution may include contamination [Water Code section 13050(l)].

Pollution Prevention - any action that causes a net reduction in the use or generation of a hazardous substance or other pollutant that is discharged into water and includes, but is not limited to, input change, operational improvement, production process change, and product reformulation (as defined in Water Code section 13263.3). Pollution prevention does not include actions that merely shift a pollutant in wastewater from one environmental medium to another environmental medium, unless clear environmental benefits of such an approach are identified to the satisfaction of the Central Valley Water Board.

Potable Water – Water that meets the drinking water standards of the USEPA and the State Water Board’s Division of Drinking Water.

Priority Development Project – Those projects that are required to incorporate appropriate storm water mitigation measures into the design plan for their respective project. Although the Permittee's SWMP may include its own definition of Priority Development Projects, that definition must be designed to achieve equivalent protection of water quality to that achieved with the following criteria:

1. Single-family hillside residences (includes development on any natural slope that is twenty-five percent or greater);
2. Residential subdivisions of ten or more units (includes single family homes, multifamily homes, condominiums, and apartments);
3. 100,000 square foot industrial/commercial development;
4. Automotive repair shops (SIC 5013, 5014, 5541, 7532-7534, and 7536-7539);
5. Restaurants (SIC 5812);
6. Parking lots with 5,000 square feet or more or with 25 or more parking spaces; and
7. Redevelopment projects that are within one of these categories are included if the redevelopment adds or creates at least 5,000 square feet of impervious surface to the original developments; if the addition constitutes less than 50 percent of the original development, the design standard only applies to the addition.

Priority Land Uses – Those developed sites, facilities, or land uses (i.e., not simply zoned land uses) within the MS4 Permittee’s jurisdiction from which discharges of trash are regulated by the Trash Provisions as follows:

- (1) High-density residential: all land uses with at least ten (10) developed dwelling units/acre;
- (2) Industrial: land uses where the primary activities on the developed parcels involve product manufacture, storage, or distribution (e.g., manufacturing businesses, warehouses, or building material sales yards);

- (3) Commercial: land uses where the primary activities on the developed parcels involved the sale or transfer of goods or services to consumers (e.g., business or professional buildings, shops, restaurants, theaters, vehicle repair shops, etc.);
- (4) Mixed urban: land uses where high-density residential, industrial, and/or commercial land uses predominate collectively (i.e., are intermixed);
- (5) Public transportation stations: facilities or sites where public transit agencies' vehicles load or unload passengers or goods (e.g., bus stations and stops); and
- (6) Equivalent alternative land uses, as approved by the Central Valley Water Board's Executive Officer, that have a substantial amount of trash

Priority Water Quality Constituent (PWQC) - A subset of the water quality constituents that represent the highest threat to receiving water quality within a Jurisdictional Runoff Area.

Reasonable Assurance Analysis (RAA) - An analysis performed by the Permittee that demonstrates with a high degree of certainty/confidence that strategies and activities proposed in the SWMP are likely to achieve water quality milestones identified in the SWMP—including timely final attainment of water quality standards. One reasonable assurance analysis may cover more than one water body-pollutant combination, but each priority water quality constituent must be addressed by at least one reasonable assurance analysis.

Receiving Water – A “water of the United States” into which pollutants are or may be discharged.

Redevelopment - Land disturbing activity that results in the creation, addition, or replacement impervious surface area on an already developed site (the amount of impervious surface area that triggers this definition shall be defined in the Permittee's development standards). Redevelopment includes but is not limited to the expansion of a building footprint; addition or replacement of a structure; replacement of impervious surface area that is not part of a routine maintenance activity; and land disturbing activities related to structural or impervious surfaces. It does not include routine maintenance to maintain original line and grade, hydraulic capacity, or original purpose of facility, nor does it include emergency construction activities required to immediately protect public health and safety.

Response – A measured biological effect (e.g., survival, reproduction, growth) as a result of exposure to a stimulus.

Restaurant – A stationary facility that sells prepared foods and drinks for consumption, including but not limited to stationary lunch counters and refreshment stands selling prepared foods and drinks for immediate consumption.

Retrofitting –A wide range of projects that provide pollutant reduction on an existing development currently untreated by any BMP or is inadequately treated by an existing BMP. Different than new development that requires storm water to be managed onsite, storm water retrofitting is applied to older developments which were constructed prior to storm water onsite management or design criteria requirements were established. Storm water retrofits can be classified into two broad categories: (1) New retrofit facilities which utilize a range of storm water treatment and runoff reduction mechanisms to create new storage and reduce pollutants; and (2) Existing onsite retrofits which convert, enhance, or restore existing BMPs to employ a more effective treatment mechanism, increase treatment volume and/or hydraulic retention time, and/or renew performance.

Routine Maintenance – Includes, but is not limited to projects conducted to:

1. Maintain the original line and grade, hydraulic capacity, or original purpose of the facility.
2. Perform as needed restoration work to preserve the original design grade, integrity and hydraulic capacity of flood control facilities.
3. Includes road shoulder work, regarding dirt or gravel roadways and shoulders and performing ditch cleanouts.
4. Update existing lines (to replace existing lines with new materials or pipes) and facilities to comply with applicable codes, standards, and regulations regardless if such projects result in increased capacity.
5. Repair leaks.

Routine maintenance does not include construction of new lines or facilities resulting from compliance with applicable codes, standards and regulations. New lines include those that are not associated with existing facilities and are not part of a project to update or replace existing lines.

Runoff - All flows in a storm water conveyance system that consists of the following components: (1) storm water (wet weather flows) and (2) non-storm water including dry weather flows.

Screening – Using proactive methods to identify illegal connections through a continuously narrowing process. The methods may include performing baseline monitoring of open channels, conducting special investigations using a prioritizing approach, analyzing maintenance records for catch basin and storm drain cleaning and operation, and verifying all permitted connections into the storm drains. Special investigation techniques may include: dye testing, visual inspection, smoke testing, flow monitoring, infrared, aerial and thermal photography, and remote control camera operation.

Sediment - Soil, sand, and minerals washed from land into water. Sediment resulting from anthropogenic sources (e.g. human induced land disturbance activities) is considered a pollutant. This Order regulates only the discharges of sediment from anthropogenic sources and does not regulate naturally occurring sources of sediment.

Solid Waste – All putrescible and nonputrescible solid, semisolid, and liquid wastes. [Cal. Govt. Code section 68055.1(h)]

Source Control Best Management Practice – Any schedules of activities, prohibitions of practices, maintenance procedures, managerial practices or operational practices that aim to prevent storm water pollution by reducing the potential for contamination at the source of pollution.

Storm Event or Wet Weather Event – Any storm event with 0.25 inches or more accumulated over the previous twenty-four (24) hours with a 50% percent chance of precipitation reported by the National Weather Service.

Storm Drain System – The basic infrastructure in a MS4 that collects and conveys storm water and approved or illicit non-storm water runoff.

Storm Water or Stormwater– Storm water runoff, snow melt runoff and surface runoff and drainage. Surface runoff and drainage pertains to runoff and drainage resulting from precipitation events. [40 CFR 122.26(b)(13)]

Storm Water Management Plan (SWMP) - Pursuant to 40 CFR 122.26(d)(2)(iv), the Permittee is required to develop and submit a SWMP covering the five (5) year permit term. The SWMP is the overarching Storm Water Management Program planning document and includes comprehensive details on the Permittee's process for implementing the permit requirements. The SWMP must be approved by the Water Board before it becomes effective.

Storm Water Pollution Prevention Plan (SWPPP) - A plan, as required by the CGP or IGP, identifying potential pollutant sources and describing the design, placement and implementation of BMPs, to effectively prevent non-storm water discharges and reduce pollutants in storm water discharges during activities covered by that permit.

Structural Best Management Practices - A subset of BMPs which detains, retains, filters, removes, or prevents the release of pollutants to surface waters from development projects in perpetuity, after construction of a project is completed.

Substantial Amount of Trash – Areas with greater than “low” or “not-littered” trash generation rates, as defined below.

Trash Generation Rate	Description of Trash Generation Rate	Trash Generation Rate Range ⁴⁶ (gallons/acre/year) [pounds/acre/year]
Low – Not littered	Effectively no trash is observed in the assessment area on average. There is approximately less than one (1) piece of trash per two (2) car lengths on average. There may be some small pieces of trash in the area, but they are not obvious at first glance. One individual could easily clean up all trash observed in a very short timeframe.	0 - 5 [0 – 3.33]

Surface Drainage – Any above-ground runoff (sheet flow, and open channel flows) that discharges into the MS4.

Surface Water Ambient Monitoring Program (SWAMP) – the State Water Board’s program to monitor surface water quality; coordinate consistent scientific methods; and design strategies for improving water quality monitoring, assessment, and reporting.

Technology Based Effluent Limitations - A technology based effluent limitation is based on the capability of a model treatment method to reduce a pollutant to a certain concentration (NPDES Permit Writer’s Manual, Appendix A). Technology based requirements represent the minimum level of control that must be imposed in a permit issued under CWA section 402.

Total Maximum Daily Load (TMDL) - The maximum amount of a pollutant that can be discharged into a water body from all sources (point and non-point) and still maintain water quality standards. Under CWA section 303(d), TMDLs must be developed for all water bodies that do not meet water quality standards after application of technology-based controls.

Toxicity - Adverse responses of organisms to chemicals or physical agents ranging from mortality to physiological responses (such as impaired reproduction or growth anomalies). The water quality objectives for toxicity provided in the Basin Plan, states “All waters shall be maintained free of toxic substances in concentrations that produce detrimental physiological responses in human, plant, animal, or aquatic life. This objective applies regardless of whether the toxicity is caused by a single substance or by the interactive effect of multiple substances. Compliance with this objective will be determined by analyses of indicator organisms, species diversity, population growth,

⁴⁶ References are provided in **Attachment N (N1.D.2)**

growth anomalies, and biotoxicity tests of appropriate duration or other methods as specified by the [Central Valley Water Board].”

Trash (and Debris) - all improperly discarded solid material from any production, manufacturing, or processing operation including, but not limited to, products, product packaging, or containers constructed of plastic, steel, aluminum, glass, paper, or other synthetic or natural materials.

Treatment Control Best Management Practice – Any engineered system designed to remove pollutants by simple gravity settling of particulate pollutants, filtration, biological uptake, media absorption or any other physical, biological, or chemical process.

Treatment Controls – Structural best management practices to either (a) remove pollutants and/or solids from storm water runoff, wastewater, or effluent, or b) capture infiltrate or use storm water runoff, wastewater, or effluent. Treatment controls include, but are not limited to, full capture systems and low-impact development controls.

Waste Load Allocation (WLA) -The portion of a receiving water’s loading capacity that is allocated to one of its existing or future point sources of pollution. WLAs constitute a type of water quality based effluent limitation.

Water Quality Milestone – A performance benchmark for a Permittee’s discharges indicating progress toward final attainment of a water quality standard in receiving waters. Water quality milestones may take a variety of forms, such as receiving water limitations, interim or final WQBELs established in TMDLs, action levels or benchmarks, pollutant concentrations, load reductions, number of impaired water bodies delisted from the List of Water Quality Impaired Segments, Index of Biotic Integrity (IBI) scores, or other appropriate metrics. Water quality milestones for each PWQC must build upon previous milestones and lead to final attainment of the applicable final water quality standards for that PWQC. The Permittee’s SWMP must include at least one water quality milestone per permit term for each PWQC.

Water Quality Objective (WQO) - Numerical or narrative limits or levels of water quality constituents or characteristics which are established for the reasonable protection of designated beneficial uses of the water or the prevention of nuisance within a specific area [Water Code section 13050 (h)].

Water Quality Standards (WQS) - Water quality standards, as defined in CWA section 303(c) consist of the designated beneficial uses (e.g., swimming, fishing, municipal drinking water supply, etc.,) of a water body and water quality criteria necessary to protect those uses.

Water Quality-Based Effluent Limitation (WQBELs) - Any restriction imposed on quantities, discharge rates, and concentrations of pollutants, which are discharged from point sources to waters of the United States necessary to achieve a water quality standard.

Water Quality Control Measures – implementation of storm water best management practices designed to meet water quality standards or objectives for the reasonable protection of beneficial uses.

Waters of the State – Any surface water or groundwater, including saline waters within the boundaries of the State. [Water Code section 13050 (e)]

Waters of the United States – Waters described by the federal Clean Water Act regulations defining “waters of the United States,” including but not limited to 40 CFR 122.2.

Watershed - That geographical area that drains to a specified point on a water course, usually a confluence of streams or rivers (also known as drainage area, catchment, or river basin).

Work Plan - The five-year implementation document that identifies and schedules the specific, detailed tasks a Permittee must perform in order to comply with the strategies and activities in its SWMP. The Work Plan is submitted as a companion document to the SWMP and must be approved by the Executive Officer.

ATTACHMENT D – COVERAGE AREA FOR ORDER R5-2026-0XXX



ATTACHMENT E – MONITORING REQUIREMENTS

E1. Toxicity Testing

- A. The Permittee shall consult with Central Valley Water Board staff on the test species and test methods specified in the State Water Board's State Policy for Water Quality Control – Toxicity Provisions (Toxicity Provisions), 1 December 2020 and revised 5 October 2021. The Central Valley Water Board has the discretion whether to require toxicity testing and to determine whether acute or chronic aquatic toxicity tests, or both, shall be required.
- B. The Permittee shall analyze the aquatic toxicity test data using the Test of Significant Toxicity (TST) as described in section III.B.3 of the Toxicity Provisions.
- C. The Permittee shall calculate the Percent Effect as specified in section III.B.4 of the Toxicity Provisions.
- D. Notification and Reporting
 - 1. The Permittee shall submit the following information in the Annual Reports:
 - a) The dates of sample collection and initiation of each toxicity test;
 - b) the reported toxicity test results according to the test methods manual chapter on report preparation and test review;
 - c) Results obtained from toxicity tests shall be reported as either a "pass" or "fail", and the Percent Effect at the Instream Waste Concentration (IWC) for each Endpoint and
 - d) All results for urban runoff parameters monitored concurrently with the toxicity test(s).
 - e) A copy of all sample documents, including chain of custody forms, the toxicity test results and all associated laboratory documents
 - f) The results and any required supporting data shall be submitted in an electronic format where the data can be manipulated.

**Table E1: List of Constituents and Associated Minimum Levels (MLs)⁴⁷
for the Storm Water and Urban Discharge Monitoring Program**

CONSTITUENTS	MLs
FIELD/LAB MEASUREMENTS	
Date	mm/dd/yyyy
Sample Time	hr:mm
Sample Location	latitude/longitude, station ID
Weather conditions	degrees F
Rainfall in previous 24-hours	Inches
Flow	feet/sec
GENERAL	mg/L
Alkalinity	2
Biochemical Oxygen Demand	2
Chemical Oxygen Demand	20-900
Chloride	2
Dissolved Oxygen	Sensitivity to 5 mg/L
Dissolved Phosphorus	0.05
Methylene Blue Active Substances (MBAS)	0.5
Nitrate-Nitrite	0.1
Oil and Grease	5
pH	0 – 14 standard units
Specific Conductance	1 umhos/cm
Suspended Sediment Concentration ⁴⁸	2
Temperature (Water)	degrees C
Total Dissolved Solids	2
Total Hardness	2
Total Kjeldahl Nitrogen	0.1
Total Petroleum Hydrocarbon	5
Total Organic Carbon	1
Total Phenols	1
Total Phosphorus	0.05
Total Suspended Solids	2
Turbidity	0.1 NTU

⁴⁷ Reporting Levels (RL) must be lower than or equal to the ML value designated in **Table E1**. If a particular ML is not attainable in accordance with procedures set forth in 40 CFR 136, the lowest quantifiable concentration of the lowest calibration standard analyzed by a specific analytical procedure may be used instead.

⁴⁸ Suspended sediment concentration (SSC) must be analyzed per American Society for Testing and Materials (ASTM) Standard Test Method D-3977-97

ATTACHMENT F – FACT SHEET

As described in **Part I.2** of this Order, this Fact Sheet sets forth the significant factual, legal, methodological, and policy rationale that serves as the basis for the requirements of this Order. This Order has been prepared under a standardized format to accommodate a broad range of discharge requirements for Permittees in the Central Valley region of California.

F1. PERMIT INFORMATION

A. **Need to Regulate Discharges from Municipal Separate Storm Sewer Systems**

The quality of storm water and non-storm water discharges from Municipal Separate Storm Sewer Systems (MS4s) is fundamentally important to the health of the environment and the quality of life in the Central Valley region. Polluted storm water and non-storm water discharges from MS4s are one of the leading causes of water quality impairment in the Central Valley region. Storm water and non-storm water accumulates pollutants, such as debris, nutrients, metals, pesticides, pathogens, and sediment as it flows over the land surface, which can result in adverse effects on receiving water quality if discharged untreated. The United States Environmental Protection Agency (USEPA) recognizes urbanization increases the variety and amount of pollutants carried into our nation's waters from contaminated storm water and urban runoff.

The National Urban Runoff Program (NURP) Study conducted by USEPA showed that MS4 discharges draining from residential, commercial, and light industrial areas contain significant loadings of total suspended solids and other pollutants.⁴⁹ The NURP Study also found that pollutant levels from illicit discharges were high enough to significantly degrade receiving water quality, and threaten aquatic life, wildlife, and human health. The general findings and conclusions of the NURP Study are reiterated in the more recent 2008 National Research Council, and many other studies continue to support the conclusions of the NURP Study.⁵⁰ For example, the United States Geological

⁴⁹ *Results of the Nationwide Urban Runoff Program*, Volumes I and II, United States Environmental Protection Agency, Washington, D.C., December 1983

⁵⁰ (1) *Preliminary Data Summary of Urban Storm Water Best Management Practices*, United States Environmental Protection Agency, Washington, D.C., EPA-821-R-09-012, August 1999; (2) State Water Resources Control Board's 2010 (or most recently approved) Clean Water Act section 303(d) List and section 305(b) report.; (3) *Urban Stormwater Management in the United States, Committee on Reducing Stormwater Discharge Contributions in Water Pollution*, Water Science and Technology Board, Division on Earth and Life Sciences, National Research Council of The National

Survey (USGS) analyzed data from the NURP Study, and summarized additional monitoring data compiled during the 1980s over 700 storm events at 99 different locations, including the City of Fresno⁵¹. The USGS report confirmed pollution problems associated with metals and sediment concentrations in urban storm water runoff.

The 1992, 1994, and 1996 National Water Quality Inventory Reports (e.g., CWA section 305(b) reports) to Congress prepared by USEPA showed a trend of impairment in the Nation's waters from contaminated urban storm water runoff. The 2004 National Water Quality Inventory showed that urban runoff/storm water discharges at that time contributed to the impairment of 22,559 miles of rivers and streams, 701,024 acres of lakes, reservoirs, and ponds, 867 square miles of bays and estuaries, and 369 acres of wetlands in the United States.⁵² Comparatively, the 2010 California Water Quality Assessment Report cited specific categories (e.g., urban-related runoff/storm water, municipal point source discharges, and hydromodification) as significant sources of impairment to the same water body types. Finally, a 1999 report by the Natural Resources Defense Council identified two main causes of the storm water pollution problem in urban areas: increased volume and velocity due to impervious cover, and certain activities may be larger contributors to increased discharge of pollutants than others.⁵³

Certain pollutants present in storm water and/or urban runoff may be derived from extraneous sources over which Permittees have no or limited jurisdiction/control. Examples of such pollutants and their respective sources are: PAHs which are products of internal combustion engine operation, nitrates, bis(2-ethylhexyl) phthalate and mercury from atmospheric deposition, lead from fuels, copper from brake pad wear, zinc from tire wear, dioxins as products of combustion, pesticides from legal applications, and natural occurring minerals from local geology.

Federal, state, regional, or local entities within the Permittees' boundaries, not currently named in this Order, operate storm drain facilities and/or discharge storm water to the storm drains covered by this Order. The Permittees may lack legal jurisdiction over these entities under applicable state and federal authorities. Consequently, the Regional Water Board recognizes that the

Academies, 2008; and (4) *Pathogens in Urban Stormwater Systems*, Urban Water Resources Research Council, August 2014.

⁵¹ U.S. Geological Survey Urban-Stormwater Data Base for 22 Metropolitan Areas Throughout the United States, Open File Report 85-337, 1985.

⁵² California Water Quality Assessment Report, USEPA, 2010.
http://ofmpub.epa.gov/waters10/attains_state.control?p_state=CA

⁵³ [Stormwater Strategies, Community Response to Runoff Pollution, Natural Resources Defense Council, May 1999](http://www.nrdc.org/water/pollution/storm/stoinx.asp). (<http://www.nrdc.org/water/pollution/storm/stoinx.asp>)

Permittees should not be held responsible for such facilities and/or discharges. However, Permittees should notify the Central Valley Water Board upon recognition of discharges, which are a threat to storm water quality protection.

The State and Regional Water Boards may consider issuing separate NPDES storm water permits to other federal, state, or regional entities operating and discharging within the Permittees' boundaries that may not be subject to direct regulation by the Permittees. Federal agencies are not subject to municipal storm water requirements although they may be permitted as industrial dischargers.

B. Background of Central Valley Region Municipal Storm Water Permits

Water pollution was first regulated in the United States under the Federal Water Pollution Control Act of 1948. The law became commonly known as the Clean Water Act in 1972, when it was amended in response to growing public concerns to control water pollution. The Clean Water Act (CWA) prohibited point source discharges of any pollutant to waters of the United States unless the discharge was authorized by a National Pollutant Discharge Elimination System (NPDES) permit. The 1987 amendments to the CWA included regulation of storm water discharges from industrial activities and municipal storm sewers. This amendment required tracking point sources and implementing controls to minimize the discharge of pollutants.

Congress amended the CWA in 1987 to require implementation of a comprehensive national program to address storm water discharges under two phases. The first phase (commonly referred to as "Phase I") was put into effect on 16 November 1990 and required NPDES permits for MS4s generally serving a population of 100,000 persons or more, specific industrial categories, and construction sites that disturbed five or more acres of land. The second phase of the 1987 CWA amendment (commonly referred to as "Phase II") was put into effect on 8 December 1999, expanding NPDES permits requirements to discharges of storm water from smaller municipalities in urbanized areas and construction sites between one and five acres of land disturbance, and conditionally excluding storm water discharges from industrial facilities that can demonstrate "no exposure" of industrial activities or materials to storm water.⁵⁴

Accordingly, the Central Valley Regional Water Quality Control Board (Central Valley Water Board) issued the first Phase I MS4 permit in 1990 to regulate municipal storm water discharges. Initially, Phase I MS4 permits contained the essentials of the CWA regulations yet provided the flexibility to address and manage storm water discharges through a runoff management program.

⁵⁴ USEPA, 1999. 40 CFR Parts 9, 122, 123, and 124. National Pollutant Discharge Elimination System Regulations for Revision of the Water Pollution Control Program Addressing Storm Water Discharges, Final Rule 64 FR 68727.

Subsequent Phase I MS4 permits issued over the next 25 years expanded requirements to include substantively the same core requirements as that first-issued Phase I MS4 permit:

1. CWA section 303(d) List and Total Maximum Daily Load (TMDL) requirements to be integrated into monitoring and storm water management program implementation;
2. compliance with water quality standards based on discharge prohibitions and receiving water limitations;
3. iterative process for managing storm water runoff;
4. sufficient levels of implementation to meet the maximum extent practicable (MEP) standard for municipal storm water discharges;
5. design standards for structural post-construction best management practices (BMPs) for new development and significant redevelopment;
6. a monitoring and reporting program;
7. a watershed management approach and more watershed-wide coordination;
8. assessments to determine the effectiveness of the Storm Water Management Program implementation; and
9. new and emerging approaches for managing storm water runoff and discharges, (e.g., low impact development (LID) and hydromodification).

Despite including substantively the same core requirements in each permit, several inconsistencies remained that complicated oversight and implementation by the Central Valley Water Board. In the past, the Central Valley Water Board's MS4 Program oversaw 7 Phase I MS4 permits covering 23 MS4s and currently implements the State Water Resources Control Board's (State Water Board) Phase II MS4 Permit, which covers over 120 Phase II MS4s across the Central Valley region. The Central Valley Water Board has acknowledged that issuing a single, region-wide MS4 permit that could apply to all Phase I and II MS4 Permittees in the Central Valley region can and is expected to result in more consistent implementation, improving coordination among agencies with watersheds crossing multiple jurisdictions, and minimizing resources spent with each permit renewal process. In June 2016, the Central Valley Water Board adopted its first region-wide MS4 permit.

C. Region-Wide MS4 Permit Approach

The first Region-wide MS4 Permit shifted the focus of permit requirements from a level of actions to be implemented by the Permittee to identifying outcomes to be achieved by those actions. This permitting approach, referred to as a storm water management framework, represents an important paradigm shift in the

approach for MS4 permits within the Central Valley region. Any Phase I or II MS4 under the jurisdiction of the Central Valley Water Board, or their designated representative, were allowed to enroll in the first Region-wide MS4 Permit.

There are two main objectives for the development of a Region-wide MS4 Permit:

- 1) bring a consistent set of MS4 permit conditions to each of the Permittee's Storm Water Management Programs to be implemented within its Jurisdictional Runoff Area; and 2) provide a water quality focused MS4 permit with conditions that will allow the Permittee the flexibility to focus efforts and resources on achieving water quality improvement rather than on completing specific prescriptive actions.

To accomplish these goals, the first Region-wide MS4 Permit required each Permittee to follow a Pollutant Prioritization approach to implement its Storm Water Management Program as described in their Storm Water Management Plan (SWMP). The first Region-wide MS4 Permit also provides a Prescriptive alternative, which serves as a "backstop" should a Central Valley Water Board approved SWMP fail to be developed or properly implemented. The Prescriptive approach clearly defines a traditional process that provides a predictable step-by-step pathway for the Permittee to follow. This approach is familiar and simple, providing a clear description of acceptable steps to compliance.

The Pollutant Prioritization approach included in the first Region-wide MS4 Permit, with respect to each Permittee's Storm Water Management Program, will be to focus on identification and prioritization of water quality impairments, and implementation of effective, reasonable and timely actions to address those priority impairments. Development and implementation of each Permittee's Storm Water Management Program will be based on assessments completed by the Permittee in accordance with prioritized water quality conditions. The Permittees will have flexibility in the development and implementation of their Storm Water Management Programs to best utilize their available resources in addressing a specific set of priorities effectively. Trying to address all the water quality priorities simultaneously has resulted in limited success, or Permittees expending resources conducting activities that do not necessarily focus on the priority water quality constituents.

Based on prioritized water quality conditions, the Permittees will identify incremental non-water quality and water quality milestones, strategies, and activities that can be used to measure and demonstrate progress or improvements toward addressing those priorities. Milestones, strategies, and approaches developed by the Permittee must include specific requirements and dates for their achievement consistent with other compliance dates described in the first Region-wide MS4 Permit (e.g., TMDL compliance dates, reporting due dates). Milestones and dates must be developed and implemented for monitoring and program elements.

Each Permittee must develop a schedule that integrates the milestones and dates for their achievement described in their SWMP. As part of the SWMP development, the Permittee must identify enforceable requirements and milestones and dates for their achievement to control MS4 discharges such that they do not cause or contribute to exceedances and/or excursions of water quality standards. Achievement of milestones must occur within a timeframe(s) that is as short as possible, taking into account the technological, operational, and economic factors that affect the design, development, and implementation of the control measures that are necessary to meet milestones. Milestones and dates for their achievement must relate to a specific water quality endpoint (e.g., a percentage reduction in sediment toxicity, MS4 drainage area is meeting the receiving water limitations within that area or meeting assigned waste load allocations specified in the applicable TMDL(s)). During the early stages of managing a priority water quality constituent, milestones may relate to a necessary non-water quality action such as securing approval or financing for a capital improvement project that ultimately will achieve water quality milestones. The measurement of progress toward achieving the milestones requires a better defined and more focused Storm Water Management Program than under the prior permit terms.

The first Region-wide MS4 Permit that allowed the Permittees to make more decisions about how to utilize and focus their resources, along with better defined monitoring and reporting requirements to inform their programmatic and water quality management decisions, the Permittee will have the opportunity to:

1. *Plan strategically.* The Permittee must have the ability to identify their available resources and develop and implement long-term management plans that can organize, collect, and use those resources in the most strategically advantageous and efficient manner possible. The ability to develop long-term plans will allow the Permittee to focus and utilize their resources in a more concerted way in order to address specific water quality priorities through stated desired outcomes.
2. *Manage adaptively.* The Permittee must be given the ability to modify their plans as additional information and data are collected. As a result of the new information and/or data, *modifications* to a Permittee's plans, programs, priorities, milestones, strategies, and/or schedules may be necessary in order to achieve a stated desired outcome.
3. *Identify synergies.* The Permittee must be given more flexibility to identify efficiencies within and among its SWMP as the strategies are developed and implemented to increase the Permittee's collective effectiveness. The Permittee must also be *able* to identify and utilize resources available from other agencies and entities to further augment and enhance their SWMPs and/or to collectively work with those other agencies and entities toward achieving a stated desired outcome.

The requirements of the first region-wide MS4 Permit provided each Permittee the flexibility and responsibility to decide what actions will be necessary to achieve an outcome that is tailored and designed by the Permittee to improve the water quality conditions. The Central Valley Water Board expected the approach of the first region-wide MS4 Permit to give each Permittee a greater sense of ownership for restoring the quality of receiving waters in the Jurisdictional Runoff Area by becoming an integral part of the decision making process in identifying water quality conditions to be addressed, as well as determining the best use of their resources.

Under the Pollutant Prioritization approach, the Permittee will have the flexibility necessary to shift its program to more targeted, water quality-driven planning and implementation, rather than prescriptive, fixed actions. The conditions of the receiving waters drive management actions, which in turn focus on measures to address pollutant contributions from MS4 discharges. It is critical that the Permittee designs and implements their Storm Water Management Program based on improved knowledge of storm water and its impacts on local and regional receiving waters in the Jurisdictional Runoff Area, and by employing BMPs that have been developed and refined over the past two decades. Storm Water Management Programs are driven by strategic planning, implementation, and adaptive management, which may result in more cost-effective implementation. This approach, which is supported by short- and long-term planning and implementation, ultimately allows the Permittee the time and flexibility through adaptive management to prioritize and customize control measures to address the local water quality issues that are specific to their Jurisdictional Runoff Area.

This Order continues the storm water management framework developed in the first region-wide MS4 Permit.

The Order authorizes the discharge of pollutants contained in storm water discharges, so long as the MS4 reduces the level of pollutants discharged to the MEP and does not otherwise cause or contribute to exceedances and/or excursions of any applicable water quality objective or water quality standard (collectively, WQS). The Order also authorizes the discharge of pollutants from certain non-storm water discharges. The Permittee's full compliance with the requirements in this Order, including timely implementation of their Storm Water Management Program described in its SWMP and Work Plans, constitutes compliance with the Discharge Prohibitions and Receiving Water Limitations **(Parts II.A and IV)**.

Although Permittees may prioritize different pollutants and adopt different strategies for meeting the MEP standard based on their unique circumstances, Permittees will fundamentally step through the same process of the storm water management permit framework to obtain and maintain coverage under this Order. Some benefits of a storm water management permitting framework include:

1. Efficiently leveraging municipal storm water resources at a regional level (e.g., monitoring and public outreach);
2. Increasing flexibility;
3. Relating priority constituents of concern to Storm Water Management Program actions;
4. Establishing a consistent regulatory framework for MS4 owners and operators across the Central Valley region;
5. Providing the ability for municipalities to prioritize the Storm Water Management Program elements with the greatest benefit to water quality; and
6. Assessing progress at local, regional, or watershed levels.

The Central Valley watershed is comprised of approximately 60,000 square miles, or over a third of California. The watershed consists of three main subwatersheds: the Sacramento Valley in the north, the San Joaquin Valley in the middle, and the Tulare Basin at the southernmost end. Most of the land area in the Central Valley watershed is agricultural. Subregions (e.g., Bakersfield area, Fresno area, Modesto, Stockton area, and Sacramento area) within the watershed are main population centers that act as hubs for regional commerce and transportation. These subregions are part of the eighteen Phase I Permittees enrolled under the first Region-wide MS4 Permit including the Phase II portion of San Joaquin County. Because a large portion of the Central Valley watershed includes agricultural areas, Permittees implement municipal storm water programs on a smaller watershed level that encompasses the urbanized area within their jurisdiction in the subregions identified above. Historically and currently, coordination and implementation of all or portions of a storm water permit are implemented by Permittees either individually or jointly as follows:

- Bakersfield Area – City of Bakersfield and Kern County;
- Fresno Area – Cities of Clovis and Fresno, County of Fresno, California State University, Fresno, and Fresno Metropolitan Flood Control District;
- City of Modesto;
- Port of Stockton;
- Stockton Area – City of Stockton and County of San Joaquin (Phase I and II); and
- Sacramento Area – Cities of Citrus Heights, Elk Grove, Folsom, Galt, Rancho Cordova, and Sacramento and County of Sacramento.

On 6 January 2017, the Cities of Antioch, Brentwood, and Oakley, Contra Costa County, and Contra Costa Flood Control District (collectively, “Eastern Contra Costa MS4s”), which are Phase I MS4s located within the Central Valley Region, under an agreement with the San Francisco Bay Regional Water Quality Control Board (San Francisco Bay Water Board) and the Central Valley Water Board were designated to have their MS4 discharges located within the Central Valley region regulated under the San Francisco Bay Water Board. Since 2019, the

Eastern Contra Costa MS4s have been regulated under the San Francisco Bay Water Board's Regional MS4 Permit.

This coordination between individual Permittees results in implementation of watershed-based approaches to addressing water quality concerns.

D. Defined Terms

Many terms (e.g., "Permittee") in this Order are defined in **Attachment C (Acronyms, Abbreviations, and Definitions)**. All other terms shall have the meaning prescribed in the federal Clean Water Act, as amended, and the Clean Water Act's applicable regulations (collectively, the "CWA") or the Porter-Cologne Water Quality Control Act, (California Water Code (Water Code) §13000 *et seq.*). Any terms not defined in **Attachment C (Acronyms, Abbreviations, and Definitions)**, the Water Code, or the CWA shall have their ordinary meaning.

F2. APPLICABLE STATUTES, REGULATIONS, PLANS AND POLICIES

A. Legal Authorities – Federal Clean Water Act and California Water Code

This Order is issued pursuant to section 402 of the CWA and implementing regulations adopted by the USEPA and chapter 5.5, division 7 of the Water Code (commencing with section 13370). This Order serves as an NPDES permit for point source discharges to surface waters. This Order also serves as waste discharge requirements pursuant to article 4, chapter 4, division 7 of the Water Code (commencing with section 13260) to the extent those provisions implement the federal NPDES permitting program in California.

The objective of the CWA is "*to restore and maintain the chemical, physical, and biological integrity of the Nation's waters.*" To carry out this objective, the CWA requires the implementation of permit programs to regulate the discharge of pollutants and dredged or fill material to the navigable waters of the U.S. and to regulate the use and disposal of sewage sludge. CWA section 402 provides the legal authority to issue a permit for the discharge of pollutants to waters of the U.S. under the NPDES. The CWA provides that NPDES permits may be issued by states which are authorized to implement the provisions of that act. California became authorized to implement the NPDES permit program on May 14, 1973.

The Porter-Cologne Water Quality Control Act (Division 7, commencing with Wat. Code § 13000) established the State Water Board and nine Regional Water Quality Control Boards (Regional Water Boards) as the principal state agencies with primary responsibility for the coordination and control of water quality. Water Code section 13200(f) established the Central Valley Water Board, which has the primary responsibility for the coordination and control of water quality in the Central Valley region, which includes but is not limited to all the basins draining into the Sacramento-San Joaquin River Delta and their tributaries. The Central Valley Water Board implements the CWA through Chapter 5.5 of the Water Code, commencing with section 13370. Water Code section 13377

provides the Central Valley Water Board the legal authority to issue waste discharge requirements to ensure compliance with all applicable provisions of the CWA and acts amendatory thereof or supplementary, thereto, to implement water quality control plans, or for the protection of beneficial uses, or to prevent nuisance.

CWA section 402(p) requires the USEPA or authorized state to issue NPDES permits for storm water discharges from MS4s to waters of the U.S. CWA section 402(p)(3)(B)(ii) requires that NPDES permits for storm water discharges from MS4s “*effectively prohibit non-storm water discharges*” into the MS4s. CWA section 402(p)(3)(B)(iii) requires that NPDES permits for storm water discharges from MS4s to “*require controls to reduce the discharge of pollutants to the maximum extent practicable [MEP], including management practices, control techniques and system, design and engineering methods, and such other provisions as the Administrator or the State determines appropriate for the control of such pollutants.*”

The USEPA published implementing regulations (Code of Federal Regulations [CFR] Title 40, Part 122 [40 CFR 122]), which prescribe permit application requirements for storm water discharges from MS4s pursuant to CWA section 402(p), on November 16, 1990. The USEPA published an Interpretive Policy Memorandum on *Reapplication Requirements for Municipal Separate Storm Sewer Systems*, which provided guidance on permit application requirements for regulated MS4s, on May 17, 1996. The federal regulations in 40 CFR 122 and guidance issued by USEPA serve as the foundation for the provisions of previous MS4 permits issued by the Central Valley Water Board. CWA section 402(p)(3)(B) provides the Central Valley Water Board the legal authority to issue an NPDES permit as compared to separate MS4 permits based upon City, County - and partial County-wide boundaries as they exist within the Central Valley region. CWA section 402(p)(3)(B) states that “*Permits for discharges from municipal storm sewers- (i) may be issued on a system- or jurisdiction-wide basis*” The federal regulations in 40 CFR 122.26(a)(1)(v) also state that the Central Valley Water Board “*may designate dischargers from municipal separate storm sewers on a system-wide or jurisdiction-wide basis. In making this determination, the [Central Valley Water Board] may consider the following factors: (A) the location of the discharge with respect to waters of the United States; (B) the size of the discharge; (C) the quantity and nature of the pollutants discharged to waters of the United States; and (D) other relevant factors.*”

More specifically, the federal regulations provide that for large and medium MS4 systems, the Central Valley Water Board may issue a regional permit. Specifically, the federal regulation in 40 CFR 122.26(a)(3)(ii) through (v) provides:

"(ii) The Director may either issue one system-wide permit covering all discharges from municipal separate storm sewers within a large or medium municipal storm sewer

system or issue distinct permits for appropriate categories of discharges within a large or municipal separate storm sewer system including, but not limited to: all discharges owned or operated by the same municipality; located within the same jurisdiction; all discharges within a system that discharge to the same watershed; discharges within a system that are similar in nature; or for individual discharges from municipal separate storm sewers within the system.

- (iii) The operator of a discharge from a municipal separate storm sewer which is part of a large or medium municipal separate storm sewer system must either: (A) Participate in a permit application (to be a permittee or a co-permittee) with one or more other operator of discharges from the large or medium municipal storm sewer system which covers all, or a portion of all, discharges from the municipal separate storm sewer system; (B) Submit a distinct permit application which only covers discharges from the municipal separate storm sewers for which the operator is responsible; or (C) A regional authority may be responsible for submitting a permit application under the following guidelines....*
- (iv) One permit application may be submitted for all or a portion of all municipal separate storm sewers within adjacent or interconnected large or medium municipal separate storm sewer systems. The Director may issue one system wide permit covering all, or a portion of all municipal separate storm sewers in adjacent or interconnected large or medium municipal separate storm sewer systems.*
- (v) Permits for all or a portion of all discharges from large or medium municipal separate storm sewer systems that are issued on a system-wide, jurisdiction-wide, watershed or other basis may specify different conditions relating to different discharges covered by the permit, including different management programs for different drainage areas which contribute storm water to the system."*

For other municipal and non-municipal separate storm sewer systems, federal regulation in 40 CFR 122.26(a)(5) and (6) states:

- "(5) The Director may issue permits for municipal separate storm sewers that are designated under paragraph (a)(1)(v) of this section on a system wide basis, jurisdiction-wide basis, watershed basis or other appropriate basis, or may issue permits for individual discharges.*

(6) For storm water discharges associated with industrial activity from point sources which discharge through a non-municipal or non-publicly owned separate storm sewer system, the Director, in his discretion, may issue: a single NPDES permit, with each discharger a co-permittee to a permit issued to the operator of the portion of the system that discharges into waters of the United States; or, individual permits to each discharger of storm water associated with industrial activity through the non-municipal conveyance system."

Based on these regulations, the Central Valley Water Board may issue a region-wide MS4 permit. The regulations also clarify that the permit may include different conditions for separate discharges covered by the permit. This allows the Central Valley Water Board to ensure that suitable water quality conditions and provisions are identified for each watershed.

The regional nature of this Order will ensure consistency of regulation within the Central Valley region and is expected to result in overall cost savings for Permittees. Managing storm water on a regional and watershed basis is expected to result in improved water quality, as this Order focuses on management practices necessary to improve water quality within the region rather than political boundaries. A single permit also allows the Central Valley Water Board staff to expend fewer resources developing successive multiple permits and allows more resources to be devoted to working cooperatively with each Permittee or Permittee group to ensure implementation of this Order results in improved water quality.

B. Federal and California Endangered Species Acts

This Order does not authorize any act that results in the taking of a threatened or endangered species or any act that is now prohibited, or becomes prohibited in the future, under either the California Endangered Species Act (Fish and Game Code sections 2050 to 2115.5) or the Federal Endangered Species Act (16 United States Code sections 1531 to 1544). This Order requires compliance with requirements to protect the designated beneficial uses of waters of the United States. Each Permittee is responsible for meeting all applicable requirements of the California and Federal Endangered Species Acts.

C. California Environmental Quality Act

The action to adopt an NPDES Permit is exempt from the provisions of Chapter 3 of the California Environmental Quality Act (Public Resources Code (PRC) section 21100, et seq.) pursuant to Water Code section 13389. (*County of Los Angeles v. Cal. Water Boards* (2006) 143 Cal.App.4th 985.)

D. State and Federal Regulations, Plans and Policies

The legal authority provided by the following regulations, plans, and policies are also included as part of the discussions in this Fact Sheet.

1. Water Quality Control Plans for the Sacramento-San Joaquin River Basins and Tulare Lake Basin

The CWA requires the Central Valley Water Board to establish water quality standards for each water body in its region. Water quality standards include beneficial uses, and water quality objectives and criteria that are established at levels sufficient to protect beneficial uses. The program of implementation includes the State's antidegradation policy. The Central Valley Water Board has adopted the *Water Quality Control Plan for the Sacramento and the San Joaquin River Basins*, Fifth Edition (Revised February 2019, as amended) and *Water Quality Control Plan for the Tulare Lake Basin*, Third Edition (Revised May 2019 as amended) (Basin Plan). Each Basin Plan designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for all waters in the Central Valley Region. In addition, the Basin Plan implements State Water Board Resolution No. 88-63, which established state policy that all waters, with certain exceptions, should be considered suitable or potentially suitable for municipal or domestic supply. Beneficial uses applicable to the surface water bodies that receive discharges from the MS4s within the Central Valley Region generally include those listed below:

Each Basin Plan identifies the following existing and potential beneficial uses for surface waters include:

- a. Municipal and Domestic Supply (MUN)
- b. Agricultural Supply (AGR)
- c. Industrial Service Supply (IND)
- d. Industrial Process Supply (PRO)
- e. Ground Water Recharge (GWR)
- f. Freshwater Replenishment (FRSH)
- g. Navigation (NAV)
- h. Hydropower Generation (POW)
- i. Contact Water Recreation (REC-1)
- j. Non-contact Water Recreation (REC-2)
- k. Commercial and Sport Fishing (COMM)
- l. Aquaculture (AQUA)
- m. Warm Freshwater Habitat (WARM)
- n. Cold Freshwater Habitat (COLD)
- o. Estuarine Habitat (EST)
- p. Wildlife Habitat (WILD)
- q. Preservation of Biological Habitats of Special Significance (BIOL)
- r. Rare, Threatened, or Endangered Species (RARE)
- s. Migration of Aquatic Organisms (MIGR)

- t. Spawning, Reproduction, and/or Early Development (SPWN)
- u. Shellfish Harvesting (SHELL)

2. Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary

The State Water Board has adopted the *Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary* (Revised December 2006 as amended), commonly referred to as the "Bay-Delta Plan." The Bay-Delta area includes the Sacramento- San Joaquin Delta, Suisun Marsh, and San Francisco Bay. The Bay-Delta Plan consists of: (1) beneficial uses to be protected; (2) water quality objectives for the reasonable protection of beneficial uses; and (3) a program of implementation for achieving the water quality objectives. The following beneficial uses for surface waters in the San Francisco Bay/Sacramento-San Joaquin Delta include:

- a. Municipal and Domestic Supply (MUN)
- b. Industrial Service Supply (IND)
- c. Industrial Process Supply (PRO)
- d. Agricultural Supply (AGR)
- e. Ground Water Recharge (GWR)
- f. Navigation (NAV)
- g. Contact Water Recreation (REC-1)
- h. Non-contact Water Recreation (REC-2)
- i. Shellfish Harvesting (SHELL)
- j. Commercial and Sport Fishing (COMM)
- k. Warm Freshwater Habitat (WARM)
- l. Cold Freshwater Habitat (COLD)
- m. Migration of Aquatic Organisms (MIGR)
- n. Spawning, Reproduction, and/or Early Development (SPWN)
- o. Estuarine Habitat (EST)
- p. Wildlife Habitat (WILD)
- q. Rare, Threatened, or Endangered Species (RARE)

Pursuant to Water Code sections 13263 and 13377, the requirements of this Order implement these Basin Plans and the Bay-Delta Plan, as applicable.

3. Inland Surface Waters, Enclosed Bays, and Estuaries of California

The State Water Resources Control Board adopted the *Water Quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries of California (ISWEBE Plan)* (May 1974, amended November 1995).

On 7 April 2015, the State Water Resources Control Board adopted *Part I Trash Provisions of the Water Quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries of California (Appendix E of the Staff Report)* (referred to as Trash Amendment) in [Resolution 2015-0019](https://www.waterboards.ca.gov/board_decisions/adopted_orders/resolutions/2015/rs2015_0019.pdf) (https://www.waterboards.ca.gov/board_decisions/adopted_orders/resolutions/2015/rs2015_0019.pdf) to address the impacts of trash to the surface waters of California through the establishment of a statewide narrative water quality objective and implementation requirements to control trash, including a prohibition against the discharge of trash.

On 7 August 2018, the State Water Resources Control Board adopted the *Bacteria Provisions and Water Quality Standards Variance Policy* (Bacteria Policy) in Resolution No. 2018-0038 as a new Part 3 of the ISWEBE Plan to protect recreational users from the effects of pathogens.

On 1 December 2020 and 5 October 2021, the State Water Resources Control Board adopted the *State Policy for Water Quality Control – Toxicity Provisions* (Toxicity Provisions) for inclusion into the ISWEBE Plan and revised the Toxicity Provisions, respectively. The Toxicity Provisions provide: (1) statewide numeric water quality objectives for acute and chronic aquatic toxicity; (2) a program of implementation to control toxicity in discharges to surface water; (3) a framework for monitoring surface waters for possible toxicity; and (4) a statistical approach for data analysis.

This Order implements the Trash Amendments, Bacteria Policy, and Toxicity Provisions throughout the applicable Permit requirements.

4. Antidegradation Policy

Federal regulations (40 CFR 131.12) require that the states develop and adopt an antidegradation policy consistent with the federal antidegradation policy and identify the methods for implementing such a policy. The State Water Board established California's antidegradation policy in State Water Board Resolution No. 68-16 ("Statement of Policy with Respect to Maintaining the Quality of the "Waters of the State"). State Water Board Resolution No. 68-16 incorporates the federal antidegradation policy where the federal policy applies under federal law.⁵⁵

The Central Valley Water Board's Basin Plans implement and incorporate by reference both the State and federal antidegradation policies. State Water Board Resolution No. 68-16 and 40 CFR section 131.12 require the Central Valley Water Board to maintain high quality waters of the State until it is demonstrated that degradation is justified based on specific findings.

⁵⁵ State Water Board Order WQ 86-17 (Fay), pp. 16-19

The discharges permitted in this Order are consistent with the antidegradation provisions of 40 CFR 131.12 and State Water Board Resolution No. 68-16.

In this Order, compliance with the federal antidegradation policy requires consideration of the following:

The Central Valley Water Board must ensure that “existing instream uses and the level of water quality necessary to protect the existing uses” are maintained and protected.⁵⁶

If the baseline quality of a waterbody for a given constituent “exceeds levels necessary to support propagation of fish, shellfish, and wildlife and recreation in and on the water, that quality shall be maintained and protected” through the requirements of the Order unless the Central Valley Water Board makes findings that: (a) any lowering of the water quality is “necessary to accommodate important economic or social development in the area in which the waters are located”; (b) “water quality adequate to protect existing uses full” is assured; and (c) “the highest statutory and regulatory requirements for all new and existing point sources and all cost-effective and reasonable best management practices for nonpoint source control are achieved.”⁵⁷ Prior to this second-tier review, the Central Valley Water Board may identify the waters for protection through the public process of a permitting action, as it is here. Before allowing any lowering of high quality water, the Central Valley Water Board must conduct an alternatives analysis that evaluates practicable alternatives that would prevent or lessen the degradation associated with the discharges permitted. In the context of 40 CFR § 131.12(a)(2)(ii), practicable means “technologically possible, able to be put into practice, and economically viable.”⁵⁸

The Order must also comply with any requirements of State Water Board Resolution No. 68-16 beyond those imposed through incorporation of the federal antidegradation policy. Resolution No. 68-16 requires finding that any lowering of water quality will be consistent with the maximum benefit to the people of the State, will not unreasonably affect beneficial uses, and will not result in water quality less than that described in the Central Valley Water Boards’ policies. State Water Board Resolution No. 68-16 requires that discharges of waste to high quality waters be regulated to meet Best

⁵⁶ 40 CFR §131.12(a)(1). This provision has been interpreted to mean that, “[i]f baseline water quality is equal to or less than the quality as defined by the water quality objective, water quality shall be maintained or improved to a level that achieves the objectives.” (State Water Board, Administrative Procedures Update, Antidegradation Policy Implementation for NPDES Permitting, 90-004 (APU 90-004), p. 4.)

⁵⁷ 40 CFR § 131.12 (a)(2).

⁵⁸ 40 CFR § 131.1 (n).

Practicable Treatment or Control (BPTC) to assure that pollution or nuisance will not occur and the highest water quality consistent with the maximum benefit to the people of the State be maintained.

The baseline water quality considered in making the appropriate findings is the best quality of the water since 1968, the year of adoption of Resolution No. 68-16, or a lower level if that lower level was allowed through a permitting or other regulatory action, such as establishing a water quality objective, that was consistent with the federal and state antidegradation policies.⁵⁹ The following analysis assumes, without deciding, that the baseline for antidegradation analysis is 1968.⁶⁰

The Board Is Not Required to Make Waterbody by Waterbody and Pollutant by Pollutant Antidegradation Findings:

The Central Valley Water Board finds that it is not required to conduct a waterbody and pollutant by pollutant antidegradation analysis for this Order. The Administrative Procedures Update, Antidegradation Policy Implementation for NPDES Permitting, 90-004 (APU 90-004), which specifies a waterbody by waterbody and pollutant by pollutant analysis for some permitting actions, does not address permitting for diffuse MS4 discharges. In addition, APU 90-004 itself indicates that a waterbody by waterbody and

⁵⁹ APU 90-004, p.4. The baseline for application of the federal antidegradation policy is 1975, which is the date used in 40 CFR § 131.3(e) to define existing uses of a waterbody. For state antidegradation requirements, see also *Asociacion de Gente Unida por el Agua (AGUA) v. Central Valley Water Board* (2012) 210 Cal.App.4th 1255,1270. The baseline for the application of the state antidegradation policy is generally the highest water quality achieved since 1968, the year the policy was adopted.

⁶⁰ The baseline may be later than 1968 for two reasons. First, the appropriate baseline is determined by the date on which a policy establishing the level of water quality to protect was effective. (Resolution 68- 16, Resolve 1.) The Region's Basin Plan has been updated and amended several times since 1971, when it was first adopted, to include new or revised water quality objectives. Second, a permitting action with appropriate antidegradation findings allowing degradation may establish a new baseline consistent with the level of water quality achieved under that permit. APU 90-004 acknowledges that no antidegradation analysis is required where the regional water board has no expectation that water quality will be reduced by the permitting action; here, if the water quality achieved under the prior permits had been APU 90-004 acknowledges that no antidegradation analysis is required where the regional water board has no expectation that water quality will be reduced by the permitting action; here, if the water quality achieved under the prior permits had been used as the baseline, arguably, no antidegradation analysis would have been required. (APU 90-004, p. 2.)

pollutant by pollutant analysis is only required when conducting a "complete" antidegradation analysis; a complete analysis, in turn, is not required where any reduction in water quality is temporally limited and would not result in any long-term deleterious effects on water quality."⁶¹ Here, the Order requires compliance with the non-stormwater discharge prohibition, Receiving Water Limitations and Numeric Effluent Limitations derived from TMDLs designed to bring MS4 discharges and receiving waters into compliance with water quality objectives.

The Central Valley Water Board additionally finds that under APU 90-004, a "simple" antidegradation analysis is appropriate for this Order. APU 90-004 states that a "simple" antidegradation analysis is allowed when a "Regional Board determines the reduction in water quality is temporally limited and will not result in any long-term deleterious effects on water quality" or where a "Regional Board determines the proposed action will produce minor effects which will not result in a significant reduction of water quality." (APU 90-004, p. 2.)

Here, the Order continues the requirements of the previous orders and imposes equivalent or more protective requirements such that the water quality established under the prior orders is expected to be maintained and improved. Generally, the prior orders instituted controls such as a prohibition on non-stormwater discharges that are a source of pollutants through the MS4s, receiving water limitations, WQBELs based on TMDLs, and monitoring programs to help ensure that water quality will be maintained at the level it is now, or improve it. The Order institutes further controls such as additional TMDL-based WQBELs.

Although many of the water bodies within the area covered by this Order are of high quality, there are also many water bodies that are impaired and listed on the State's CWA section 303(d) List, and the Central Valley Water Board has established TMDLs to address these impairments. This Order requires Permittees to comply with applicable effluent limitations described in **Attachment G**, which are consistent with the assumptions and requirements of applicable waste load allocations set forth in the TMDLs. Because the development and approval of new TMDLs, or modification of existing TMDLs, may occur during the term of this Order, **Attachment G** will be updated with new TMDLs and modifications to existing TMDLs as appropriate. The USEPA provides different approaches for TMDL implementation in its *Draft TMDLs to Stormwater Permits Handbook*, which discusses BMP review and selection, establishing linkages between BMP implementation and load reductions, assessments, and BMP/outfall/receiving water monitoring.⁶² This Order includes requirements to develop and implement Storm Water Management

⁶¹ APU 90-004, p. 2.

⁶² Draft TMDLs to Stormwater Permits Handbook, USEPA, 2008, Chapters 5 and 6.

Programs, prevent or eliminate discharges causing or contributing to violations of water quality standards, and effectively prohibit non-storm water discharges into the MS4. The issuance of this Order does not authorize an increase in the amount of discharge of waste.

The Central Valley Water Board Makes the Following Antidegradation Findings:

The Central Valley Water Board determines that the findings made below meet the requirements of a simple or general antidegradation analysis, as appropriate for the Order. With these findings, based on the information available to it and using its best professional judgment, the Central Valley Water Board concludes that the discharges permitted in the Order are consistent with the antidegradation provisions of 40 CFR section 131.12 and Resolution No. 68-16. The Central Valley Water Board's conclusion that the terms and conditions of the Order are consistent with the federal and State antidegradation policies is based on the following analysis.

I. Waterbodies that do not meet water quality objectives (waterbodies that are not high quality):

Most of the receiving waters within the area covered by the Order are not meeting water quality objectives for at least one pollutant associated with MS4s, meaning that they are not attaining water quality objectives necessary to protect beneficial uses. The Central Valley Water Board has established numerous TMDLs to address many of these impairments.

Under both federal and State antidegradation policies, receiving waters with TMDLs are not "high quality" waters for the regulated pollutants. Given historical land use patterns and related polluting activities in the Central Valley Region since 1968, it is reasonable to assume that waterbodies that do not meet water quality objectives now, due entirely or partly to urban sources, likely did not meet those water quality objectives in the baseline year of 1968. Although the contribution of urban sources relative to other sources has changed since 1968, urban sources have been present and only intensified since then. For purposes of this analysis, these waters are not considered high quality waters.

For receiving waters that are not high quality waters, the federal antidegradation policy requires that regulatory actions ensure that existing instream uses and the level of water quality necessary to protect the existing uses is maintained and protected. (40 CFR § 131.12(a)(1).) The Order ensures that existing instream (beneficial) uses and the level of water quality necessary to protect the existing uses is maintained and protected through receiving water limitations. Receiving water limitations do not allow Permittees to cause or contribute to exceedances of water quality objectives in the receiving waters. Existing in-stream beneficial

uses and the necessary water quality are also protected by WQBELs implementing waste load allocations designed to restore impaired waterbodies with TMDLs. The Order also ensures that discharges will not unreasonably affect present and anticipated beneficial uses and will not result in water quality less than water quality objectives, as required by Resolution No. 68-16. This is achieved through the following provisions:

- a. The Order requires compliance with receiving water limitations to meet water quality standards in the receiving waters by demonstrating compliance with the Order or implementing an approved Storm Water Management Plan (SWMP). Additionally, the Order requires a comprehensive evaluation and update, through the required adaptive management process, of the SWMP during the permit term to ensure progress toward achieving WQBELs and receiving water limitations.
- b. The Order requires Permittees to comply with WQBELs and/or receiving water limitations consistent with the assumptions and requirements of WLAs assigned to MS4 discharges established in TMDLs applicable to waterbodies in the Central Valley Region. The TMDLs are intended to restore water quality to protect the beneficial uses of the impaired waterbodies.
- c. The Order includes requirements for extensive monitoring and reporting designed to identify changes in water quality at representative outfalls and in receiving waters.

These provisions are collectively designed to halt any further degradation of impaired waterbodies and improve the quality of such waters to a level that is protective of existing uses over a time schedule that is as short as possible. The antidegradation policies do not explicitly or implicitly override the authority and discretion granted to the Central Valley Water Board by the Clean Water Act and the Water Code as to how it structures a permit to ensure water quality necessary to protect beneficial uses. The law does not require immediate restoration of impaired waterbodies, nor does it require an immediate prohibition of discharges that contribute to an exceedance in the waterbody. Rather, federal regulations at 40 CFR section 122.47 allow NPDES permits, including MS4 permits, to have compliance schedules.

Similarly, Water Code section 13263(c) authorizes the Central Valley Water Board to include a time schedule for achieving water quality objectives in waste discharge requirements. Where a TMDL has been established, Water Code section 13242 states that the TMDL implementation plan, as incorporated into the water quality control plan, shall include a time schedule for actions to be taken. When issuing waste discharge requirements, Water Code section 13263 requires Regional

Water Boards to implement any relevant water quality control plans that have been adopted. Water quality objectives must be achieved, but the law recognizes and allows for the fact that it can take time to restore or achieve the objectives. While MS4 permits must include a technology-based standard of effectively prohibiting non-storm water discharges through the MS4 and reducing pollutants in the discharge to the maximum extent practicable, requiring strict compliance with water quality standards is at the discretion of the permitting agency.⁶³

In this regard, some impaired waterbodies may remain the same or continue to degrade before showing improvement. This period may be multiple years. This is not contrary to the authorities for compliance schedules stated above and is not contrary to the antidegradation policies. The antidegradation policies do not require socioeconomic findings justifying any continued degradation of waterbodies that are not high quality that may occur while the Permittees implement requirements according to a compliance schedule. If socioeconomic findings are required, the Central Valley Water Board finds that this potential, limited, and temporary further lowering of water quality is justified.

II. High quality waterbodies:

The term “high quality waters” applies to waterbodies that may be high quality regarding some pollutants but not all. Some of the waterbodies within the area covered by the Order may be high quality waters with regard to some pollutants. Some of these waterbodies may be currently high quality compared to current objectives. Others of these waterbodies may be currently impaired but may be classified as high quality waters because they were historically high quality for certain pollutants. Discharges of stormwater and non-stormwater from MS4s into such waterbodies may have lowered the quality of the waterbodies since 1968 for certain pollutants. For all these high quality waterbodies, the Central Valley Water Board finds as follows:

- a. **Practicable Alternatives:** The Central Valley Water Board has evaluated a range of practicable alternatives that would prevent or lessen any degradation associated with permitted MS4 discharges to high quality waters. These alternatives are described below based on their major differences.
 - i. **Alternative 1 – Complete prohibition on some or all pollutants in non-stormwater discharges to high quality waters:** This alternative would prohibit MS4 discharges of some or all pollutants in non-stormwater to receiving waters. By eliminating non-stormwater discharges, pollutants from

⁶³ State Water Board Order WQ 2015-0075, p. 11.

non-stormwater discharges would not reach high quality receiving waters during dry weather and thus not cause any degradation. In high quality watersheds, this alternative could require the Permittees to either divert all non-stormwater to a facility for treatment, or retain all non-stormwater through retention basins, infiltration galleries, and other controls that would prevent non-stormwater from reaching surface waters. Alternatively, Permittees could install specific pollutant control measures that prevent specific pollutants from being discharged through the MS4.

- ii. **Alternative 2 – Complete prohibition on some or all pollutants in stormwater discharges to high quality waters:** This alternative would prohibit MS4 discharges of some or all pollutants in stormwater to high quality receiving waters. By eliminating these discharges, pollutants from stormwater would not reach high quality receiving waters during wet weather and not cause any degradation. As wet weather will always occur, this alternative could require the Permittees to either divert all stormwater in the MS4 to a facility for treatment, or retain through retention basins, infiltration galleries, and other controls. Permittees could also install pollutant control measures that prevent specific pollutants from being discharged through the MS4.
- iii. **Alternative 3 – Storm Water Management Plan alternative compliance option where ongoing implementation does not deem a Permittee in compliance with receiving water limitations for any high quality waters:** This alternative would allow the Permittees to implement approved SWMPs with customized control measures to comply with receiving water limitations, attain WQBELs, and meet other requirements. Under this alternative, the Central Valley Board would not deem a Permittee in compliance with receiving water limitations for high quality waters while they are fully implementing an approved SWMP. This alternative includes a new, enforceable, regimented iterative process to continually improve the Permittees' systems of controls.
- iv. **Alternative 4 – Storm Water Management Plan alternative compliance option where ongoing implementation deems a Permittee in compliance with receiving water limitations for high quality waters:** This alternative would allow the Permittees to implement approved SWMPs with customized control measures to

comply with receiving water limitations, attain WQBELs, and meet other requirements in the same way as Alternative 3. Alternative 4 would also include an enforceable regimented iterative process. Unlike Alternative 3, the Central Valley Board would conditionally deem a Permittee in compliance with receiving water limitations for current or historically high quality waters while they are developing and implementing an approved SWMP.

b. Economic and Social Development Considerations and Consistency with Maximum Benefit to the People of the State:

The Central Valley Water Board incorporated Alternative 4 and aspects of Alternatives 1 and 2 into the Order. These alternatives may allow limited degradation of high quality waterbodies by MS4 discharges, but these alternatives ultimately require MS4 discharges to meet and not fall below water quality standards. Such degradation of high quality waters is necessary to accommodate important economic or social development in the area and is consistent with the maximum benefit to the people of the State for the following reasons:

- i. Alternatives 1 and 2, if implemented as full prohibitions, would hamper important social and economic development.
 1. Discharges of stormwater and non-stormwater to MS4s, in certain circumstances, are to the maximum benefit to the people of the State. The discharges may be necessary for flood control, public safety, and the availability of water supplies. MS4s include storm drainage facilities that are used to prevent flooding. Much of the flood control infrastructure is designed to mitigate the flood effects of urban development. The infrastructure is not always adequate to both control flooding and retain non-stormwater runoff and both functions are not compatible for all facilities. Storm drainage facilities may be used to facilitate water transfers between water purveyors and support domestic water supply. These temporary, non-stormwater discharges can mobilize pollutants, such as pathogens and nutrients, which may be present in the MS4. Requiring MS4 owners and operators to retain these discharges or to remove pollutants prior to discharge could interfere with a vital public service. Complying with complete prohibitions in Alternatives 1 and 2 would not be practicable at all times and in all parts of the MS4.

2. The majority of Permittees are cities and counties that provide essential and valuable public services. These services include police and emergency services, refuse collection, public transportation, nuisance abatement, parks and recreation, and the operation and maintenance of roads, drainage, and other infrastructure. In some cases, Permittees operate municipal airports and sewer and energy utilities. Funding sources for these services are varied and not always mutually interchangeable. For example, functional revenue from a municipal electric utility may not be diverted to fund unrelated pollution controls (Understanding the Basics of Municipal Revenues in California: Cities, Counties, and Special Districts, Institute for Local Government, 2016 Update). Controlling stormwater discharges so there is no potential degradation of potential high quality waters through Alternatives 1 and 2 would require a rapid increase in appropriate revenue sources to fund various infrastructures and programs. A Permittee would have to make significant tradeoffs in the services that it provides its residents and businesses while obtaining funding to achieve compliance with the prohibitions outlined in Alternatives 1 and 2. This may manifest itself in the reduction of some public services or prevent other public services from being provided. Reductions in service levels could harm the quality of life of residents and affect the efficiency of business' economic activity. Reductions in service levels could disproportionately affect disadvantaged communities.
3. The relationship between cost and levels of pollution reduction are typically non-linear. In many cases, the costs increase exponentially as dischargers employ more controls that achieve zero discharge of a pollutant. Assimilative capacity plays an important part in allowing some pollution without affecting beneficial uses by avoiding the exponentially increasing cost of achieving zero discharge. Such costs could be unnecessary if assimilative capacity is available so that the complete elimination of a pollutant in the discharge is not needed to protect beneficial uses. Efforts to comply with a complete prohibition are likely to experience diminishing returns. This is because costs typically increase exponentially relative to the benefits as permittees

approach elimination of the pollutant load. In cases where the incremental pollutant load falls within the receiving waterbody's assimilative capacity, the related incremental cost of complying and eliminating that incremental load may have no benefit to the protection of beneficial uses. A complete prohibition may be a costly over-correction for some waterbody-pollutant combinations.

4. The effectiveness of Alternatives 1 and 2 should be considered in the context of the suite of regulatory actions to control pollutants from all contributors. A complete prohibition in this Order would conflict with other NPDES permits, such as State Water Board's Construction General Permit and Industrial General Permits. There are also other NPDES permits that authorize the discharge of waste to high quality waters based, in part, on assimilative capacity. These discharges often commingle with runoff from MS4s and would complicate efforts to monitor compliance. A complete prohibition also conflicts with many of the region's TMDLs, which assign waste load allocations that allow MS4 discharges of pollutants that have been calculated to achieve water quality objectives in the receiving waterbody.
5. For some waterbody-pollutant combinations, the dominant causes of degradation are pollutants that have accumulated from past discharges, legacy pollutants, or non-point sources. In these cases, a complete prohibition of pollutants in runoff would not affect the dominant causes of degradation. A complete prohibition would not restore the high quality waterbody and could come at a high cost (and at the expense of other needed public services). For these waters, a complete prohibition may be unnecessary or socially inefficient because the most effective and least costly strategies, such as offsets or pollution trading among different sources in a watershed, were not considered. Dischargers would be preoccupied with eliminating their own discharges within the constraints of their own abilities instead of working to affect more cost-effective, collaborative strategies with one another in a watershed. Essentially, dischargers would narrowly frame the water quality problem, resulting in inefficient or ineffective solutions.

- ii. Certain aspects of Alternatives 1 and 2 are practicable and have been incorporated into the Order. As more fully described in this Fact Sheet, the Order also largely prohibits the discharge of non-stormwater into the MS4 to receiving waters pursuant to Clean Water Act section 402(p)(3)(B)(ii). There are limited exceptions where the non-stormwater discharge is expected not to be a source of pollutants. The Order also prioritizes treatment control measures that maximize the capture of stormwater through retention basins, infiltration galleries, and other controls.
- iii. Alternatives 3 and 4 would implement the Order with the use of Storm Water Management Plans (SWMPs). Alternative 3 differs from Alternative 4 in that, while developing and implementing SWMPs, Permittees would not be deemed in compliance with WQBELs and receiving water limitations for the waterbody-pollutant combination(s) covered by the SWMP. Both Alternatives 3 and 4, if implemented, could result in limited degradation of high quality waterbodies, particularly because SWMPs allow the Permittees the flexibility to sequence addressing water quality priorities over time and on a watershed scale through customized strategies, control measures, and BMPs. However, the Permittees must ultimately attain WQBELs and meet receiving water limitations by the specified deadlines and must include control measures that provide reasonable assurance those limitations will be attained. Such controls necessarily take time to design and construct. But it is to the maximum benefit of the people of the State that such controls be designed and implemented properly to be protective of water quality in the long run. These measures that control impacts from stormwater and non-stormwater discharges in the Order are typically effective across multiple pollutants. The alternatives would concurrently address other constituents of concern that may not be causing impairment but may still be leading to degradation, resulting in improvements in levels of many pollutants, including pollutants for which the receiving water may be high quality.
 - 1. Alternatives 3 and 4 avoid the high economic and social costs associated with decreased public services analyzed above in this antidegradation analysis. At the same time, Alternatives 3 and 4 provide additional economic and social benefits to the people of the State by incentivizing and incorporating projects that include multiple benefits beyond water

quality protection. These additional benefits may support local community goals such as recreation, promotion of walkable communities and non-motorized transportation, increased water supplies, improved wildlife habitat, and flood control.

- iv. Alternative 4 is necessary to accommodate important economic and social development and to the maximum benefit of the people of the State, because coupling the watershed-based framework with deemed compliance status also incentivizes collaboration to implement the most cost-effective controls. The kinds of projects built under the watershed-based framework with deemed in compliance status should facilitate investment and construction of multi-benefit projects that include parks, infiltration, and low impact development (among other things) in communities that might not have otherwise seen that investment. In the Los Angeles Region, which has implemented a watershed-based framework using Watershed Management Plans (WMPs) since 2012, there was ample testimony to this effect at the Los Angeles Water Board Meeting held on July 16, 2021. In sum, Alternative 4 has the greatest chance of success, within the shortest time frame, and furthers the goal of maintaining and achieving water quality standards.
- v. Trend analyses have not been completed for each waterbody-pollutant combination in the Central Valley Region. There is a possibility that water quality has degraded or will degrade during the term of this Order for some of the countless waterbody-pollutant combinations. This is possible for all alternatives considered above. Moreover, no alternative results in a situation where an optimized system of controls manifests shortly after the effective date of this Order. A more realistic goal is to compel Permittees to implement that system as soon as possible. If a compliance deadline is established for a pollutant, as with waste load allocations, then that system should be effective as soon as possible but no later than the final compliance deadline. Alternative 4 is most likely to achieve these goals in the most efficient manner. Therefore, degradation that may occur while that system of controls is being developed is to the maximum benefit of the people of the State.
- vi. Alternative 4 may result in limited degradation of high quality waters that are currently impaired waters that may

nevertheless be considered high quality waters based on the historic baseline. The federal antidegradation policy does not require consideration of economic and social costs associated with degradation; it only requires findings that “allowing lower water quality is necessary to accommodate important economic or social development in the area in which the waters are located.” The State antidegradation policy does not define the exact factors that must be considered in determining “maximum benefit to the people of the state.” APU 90-004 states that factors to be considered in a complete antidegradation analysis include economic and social costs of the discharge compared to its benefits, but this Order is subject only to a simple antidegradation analysis. The Central Valley Water Board has nevertheless considered the costs associated with water quality degradation that may occur under Alternative 4 but has done so at a generalized level. Specifically, in choosing Alternative 4 over Alternative 3, the Central Valley Water Board finds as follows:

1. There are significant environmental, public health, and economic costs associated with exceedances of water quality objectives. The Central Valley region’s economy thrives on a healthy environment, as does the health of its population. By way of example, the failure to control stormwater runoff (which would result in exceedances of water quality objectives) would, among other things, negatively impact water quality, which would negatively impact the economy. Similarly, the failure to meet water quality objectives would negatively impact recreation and public health.
2. Where Alternative 4 may allow a currently high quality waterbody to degrade below water quality objectives, or where it will allow a currently impaired, but historically high quality waterbody to stagnate or worsen in quality, even for multiple years, this allowance is for a finite period of time, defined by the compliance schedule specified in the Order and the approved SWMP. The Central Valley Water Board finds that the temporary degradation is justified based on the social and economic benefits discussed in this Fact Sheet, which is associated with Alternative 4, notwithstanding the potential costs of degradation. In particular, the Central Valley Water Board anticipates that the system of controls that are designed and implemented over a longer timeframe are more likely

to lead to water quality improvements. Any such degradation over a limited period is also consistent with federal regulations and state law allowing for implementation schedules and compliance periods.

3. Alternative 4 could potentially avoid some of the costs discussed in the Fact Sheet, because some Permittees may correct some exceedances earlier if required to comply immediately with receiving water limitations. From a practical perspective, however, the Central Valley Water Board finds that immediate compliance, particularly for those waters that may have been high quality historically but are not high quality currently, is unrealistic even if required, given the technical and financial constraints faced by Permittees. Since Permittees will not be able to afford to immediately comply, any costs avoided would be minimal.

- vii. For all of the reasons set forth above, the Central Valley Water Board finds that any lowering of high quality waters under this Order's structure, which is consistent with Alternative 4 and components of Alternatives 1 and 2, is necessary to accommodate important economic or social development in the Central Valley Region and is to the maximum benefit of the people of the State.

c. **Requirement for Highest Statutory and Regulatory**

Requirements and Best Practicable Treatment or Control: This Order requires the highest statutory and regulatory requirements and requires that the Permittees meet best practicable treatment or control.

Resolution No. 68-16 does not define "best practicable treatment or control"; however, the State Water Board has evaluated what level of treatment or control is technically achievable using best efforts. (See State Water Board Orders WQ 81-5 (City of Lompoc), WQ 82-5 (Chino Basin Municipal Water District), WQ 90-6 (Environmental Resources Protection Council).) To evaluate the best practicable treatment or control method, the discharger should compare the proposed method to existing proven technology; evaluate performance data; compare alternative methods of treatment or control; and/or consider the method currently used by the discharger or similarly situated dischargers. The costs of the treatment or control should also be considered. (Questions and Answers, Resolution No. 68-16, State Water Board (Feb. 16, 1995), p. 6.)

- i. As required by 40 CFR section 122.44(a), Permittees must comply with the “maximum extent practicable” technology-based standard set forth in CWA section 402(p)(3)(B)(iii) and implement the minimum control measures required of a stormwater management program by 40 CFR section 122.26(d)(2)(iv).
- ii. As required by CWA section 402(p)(3)(B)(iii) and 40 CFR section 122.44(d)(1)(vii)(B), Permittees must comply with applicable WQBELs based on TMDL WLAs established for waters in the Central Valley Region.

G1. The measures that control impacts from stormwater and non-stormwater discharges in the Order are typically effective across multiple pollutants. For example, retention basins, low-impact development controls, and low flow diversions avert stormwater and non-stormwater from reaching the receiving water at all—preventing degradation to the receiving water from multiple types of constituents. The SWMP provisions contained in the Order are designed to achieve water quality standards for those constituents that are impairing the receiving water, as well as to address other constituents of concern that may not be causing impairment as defined in CWA section 303(d) and State policy. The SWMPs developed pursuant to these provisions will likely result in improvements in levels of all pollutants, including those for which the receiving water may be high quality.

As a final backstop against degradation, the Order includes an extensive monitoring and reporting program, including monitoring of MS4 discharges at representative outfalls and in receiving waters for pollutants of concern in receiving waterbodies; monitoring during both wet weather and dry weather conditions; and analysis of toxicity in receiving waters. Monitoring data must be submitted annually, and the Order also includes reopener provisions to allow modification of the Order as necessary to add preventative provisions if a threat of degradation is suspected. The monitoring and reporting requirements are sufficient to identify and address changes in water quality.

5. Anti-backsliding Requirements

The CWA contains both statutory anti-backsliding provisions in section 402(o) and regulatory anti-backsliding provisions in 40 CFR section 122.44(l). The CWA’s statutory prohibition against backsliding applies under a narrow set of criteria specified in section 402(o). Section 402(o)(1) prohibits relaxing technology based effluent limitations (TBELs) originally established based on best professional judgment (BPJ) to reflect subsequently promulgated effluent limitation guideline. This section is inapplicable here since none of the WQBELs in the Order are TBELs based on BPJ. Section 402(o)(1) also prohibits relaxing of WQBELs imposed pursuant to CWA sections 301(b)(1)(C) or 303(d) or (e), unless an exception in CWA section 402(o)(2) applies. Relaxation of WQBELs may also be allowed if such backsliding is consistent with the provisions in CWA section 303(d)(4). CWA section

303(d)(4) allows backsliding in the following circumstances. First, “CWA section 303(d)(4)(A) allows the establishment of a less stringent effluent limitation when the receiving water has been identified as not meeting applicable water quality standards (i.e., a nonattainment water)” if: (a) the existing WQBEL is based on a TMDL or other WLA ; (b) the cumulative effect of such revisions assures attainment of water quality standards; or (c) the designated use is removed.” Second, section 303(d)(4)(B) applies to “waters where the water quality equals or exceeds levels necessary to protect the designated use, or to otherwise meet applicable water quality standards (i.e., an attainment water). Under CWA section 303(d)(4)(B), a WQBEL may be relaxed as long as relaxation complies with the state’s antidegradation policy.” “U.S. EPA has consistently interpreted CWA section 402(o)(1) to allow relaxation of WQBELs and effluent limitations based on state standards if the relaxation is consistent with the provisions of CWA section 303(d)(4) or if ... [certain] of the exceptions in CWA section 402(o)(2)... [apply]. The two provisions [303(d)(4) and 402(o)(2)] constitute independent exceptions to the prohibition against relaxation of effluent limitations. If either is met, relaxation is permissible.” This Order complies with anti-backsliding requirements because no WQBEL has been relaxed from the previous Permit.

6. Clean Water Act Section 303(d) List and Total Maximum Daily Loads

CWA section 303(d)(1) requires each State to identify specific water bodies within its boundaries where water quality standards are not being met or are not expected to be met after implementation of technology-based effluent limitations on point sources. Water bodies that do not meet water quality standards are considered impaired and are placed on the state’s “303(d) List.” Periodically, USEPA approves the State’s updated CWA section 303(d) List.

Most recently, USEPA approved the State’s 2012 CWA section 303(d) List of impaired water bodies, which includes certain receiving waters in the Central Valley region. For each listed water body, the state or USEPA is required to establish a TMDL for each pollutant impairing the water quality standards in that water body. A TMDL is a tool for implementing water quality standards and is based on the relationship between pollution sources and in-stream water quality conditions. The TMDL establishes the allowable pollutant loadings for a water body and thereby provides the basis to establish water quality-based controls. These controls should provide the pollution reduction necessary for a water body to meet water quality standards.

A TMDL is the sum of the allowable pollutant loads of a single pollutant from all contributing point sources (the waste load allocations) and non-point sources (load allocations) plus the contribution from background sources and a margin of safety (40 CFR 130.2(i)). MS4 discharges are considered point source discharges. For 303(d)-listed water bodies and pollutants in the Central Valley region, the Central Valley Water Board or USEPA develops and adopts TMDLs that specify these requirements.

Since 1999, the Central Valley Water Board has established fifteen (15) TMDLs to remedy water quality impairments in various water bodies within the Central Valley region. Some of these TMDLs identify MS4 discharges as a source of pollutants to these water bodies, and, as required, establish waste load allocations or other requirements for water bodies located within MS4 jurisdictions and/or MS4 discharges to reduce the amount of pollutant discharged to receiving waters (**Attachment G, Specific Provisions for Total Maximum Daily Loads Applicable to Order R5-2016-0040**). CWA section 402(p)(3)(B)(iii) requires the Central Valley Water Board to impose permit conditions, including: “management practices, control techniques and system, design and engineering methods, and *such other provisions as the Administrator or the State determines appropriate for the control of such pollutants.*” (Emphasis added.) CWA section 402(a)(1) also requires states to issue permits with conditions necessary to carry out the provisions of the CWA. Federal regulations require that NPDES permits incorporate water quality based effluent limitations that are consistent with the requirements and assumptions of any applicable waste load allocations (WLAs), which may be expressed as numeric effluent limitations, when feasible, and/or as a BMP program of expanded or better-tailored BMPs (40 CFR 122.44(d)(1)(vii)(B) and 40 CFR 122.44(k)(2) and(k)(3)). Water Code section 13377 also requires that NPDES permits include limitations necessary to implement water quality control plans. Therefore, this Order includes water quality objectives, receiving water limits and other provisions to implement the TMDL waste load allocations assigned to Permittees regulated by this Order.

Each TMDL in **Attachment G** includes the following information:

- (a) **Applicability:** This information includes: the resolution under which the TMDL Basin Plan amendment was adopted and approved, the applicable effective date of the TMDL, where the TMDL is applicable (i.e. water body), and the Permittees that are responsible for implementing the specific provisions.
- (b) **Interim TMDL Compliance Requirements:** If the final TMDL compliance date has not passed and there are interim TMDL compliance requirements, they are included in this section.
- (c) **Final TMDL Compliance Requirements:** For each TMDL, the final TMDL compliance requirements consist of the final date for attaining the applicable WLAs (“Final Compliance Deadline”), the applicable WLAs, and the TMDL compliance determination options. The WQBELs require the Permittee to implement BMPs that will meet the applicable WLA by the corresponding Final Compliance Deadline provided in **Attachment G**. The WQBELs implementing the TMDLs that apply to one or more Permittees are incorporated by reference into Provision III.B of the Order. Unless specified otherwise in **Attachment G**, applicable WLAs become enforceable as numeric WQBELs when the Final Compliance

Deadline passes. BMPs implementing applicable WQBELs must be incorporated into SWMPs. Compliance with the applicable WQBELs will be determined in accordance with the TMDL compliance determination options.

- (d) **Specific Monitoring and Assessment Requirements:** Any applicable, specific monitoring and assessment requirements are included.

7. National Toxics Rule and California Toxics Rule.

This Order implements all other applicable federal regulations and State regulations, plans and policies, including, but not limited to, the California Toxics Rule at 40 CFR 131.38 (Water Quality Standards; Establishment of Numeric Criteria for Priority Toxic Pollutants for the State of California Rule [California Toxics Rule or CTR]).

U.S. EPA adopted the National Toxics Rule (NTR) on 22 December 1992, and later amended it on 4 May 1995 and 9 November 1999. About forty criteria in the NTR applied in California. On 18 May 2000, U.S. EPA adopted the CTR. The CTR promulgated new toxics criteria for California and, in addition, incorporated the previously adopted NTR criteria that were applicable in the state. The CTR was amended on 13 February 2001. These rules contain federal water quality criteria for priority pollutants.

On 1 December 2020, the State Water Board adopted State Policy for Water Quality Control: Toxicity Provisions (Toxicity Provisions) which established statewide numeric water quality objectives for both acute and chronic toxicity, using the TST, and a program of implementation to control toxicity. On 5 October 2021, the State Water Board adopted a resolution confirming that the Toxicity Provisions were adopted as a State Policy for Water Quality Control, for all inland surface waters, enclosed bays, estuaries, and coastal lagoons of the state, regardless of their status as waters of the United States. The Toxicity Provisions establish a uniform regulatory approach to provide consistent protection of aquatic life beneficial uses and protect aquatic habitats and life from the effects of known and unknown toxicants. The Toxicity Provisions were approved by OAL on 25 April 2022, and by U.S.EPA on 1 May 2023.

On 14 December 2023, the State Water Board applied for U.S. EPA Region IX review and approval of a limited-use alternative test procedure (ATP), for the use of one-effluent concentration when conducting whole effluent toxicity (WET) testing, pursuant to 40 Code of Federal Regulations section 136.5 (Aug. 28, 2017). The application is specific to acute or chronic WET tests in Table 1 of the application when using the Test of Significant Toxicity (TST) statistical approach (U.S. EPA, 2010) for analyzing the data. The application is being sought for all dischargers or facilities in the State of California and their associated laboratories. The ATP application is still pending with U.S. EPA.

The use of the TST have been the subject of litigation. In December 2024, the Second District Court of Appeal upheld the use of the TST in an NPDES permit in the case *Camarillo Sanitary District v. California Regional Water Quality Control Board - Los Angeles Region*.

A separate legal challenge to the State Water Board's adoption of the Toxicity Provisions originated in Fresno County Superior Court on 18 July 2022, through a petition for writ of mandate filed by Camarillo Sanitary District, City of Simi Valley, City of Thousand Oaks, Central Valley Clean Water Association, and Clean Water SoCal (formerly known as Southern California Alliance of Publicly Owned Treatment Works) (Petitioners) . One of the claims was that the Toxicity Provisions was inconsistent with the Clean Water Act. On 9 October 2023, the superior court denied the petition in its entirety.

On 19 December 2023, three of the Petitioners filed a notice of appeal of the Fresno Superior Court's decision upholding the Toxicity Provisions. On 5 August 2025, the Fifth District Court of Appeal issued a published opinion holding that the TST statistical approach, which is an integral component of the Toxicity Provisions, cannot be utilized in NPDES permitting to evaluate WET data because the TST is not an approved method under 40 Code of Federal Regulations Part 136. The Court of Appeal did not, however, disturb the Toxicity Provisions' use of the TST as a part of its water quality objectives. The State Water Board prevailed on all other claims in the litigation. The Court of Appeal's decision became final on 4 September 2025.

On 15 September 2025, the State Water Board filed a petition for review of the Fifth Circuit Court of Appeal's decision with the California Supreme Court. On 12 November 2025, the California Supreme Court granted review. The issues to be briefed and argued are limited to the issues raised in the State Water Board's petition for review.

Pending the California Supreme Court's review, the opinion of the Fifth Circuit Court of Appeal is not binding on the Water Boards. However, the opinion may be cited, not only for its persuasive value, but also for the limited purpose of establishing the existence of a conflict in authority.

In accordance with Water Code sections 13146 and 13247, the Regional Board must fully implement the water quality objectives and their implementation procedures in the Toxicity Provisions. The numeric water quality objectives for chronic and acute toxicity established by the Toxicity Provisions, which are based on the TST, were approved by U.S. EPA and remain in effect. As such, the numeric water quality objectives continue to serve as the applicable federal water quality standards in California.

The Water Boards must also continue to comply with federal Clean Water Act NPDES regulations for determining reasonable potential and establishing applicable water quality-based effluent limitations (WQBELs). NPDES

regulations (40 CFR § 122.44(d)(1)(vii)(A)) require that all WQBELs be derived from and comply with all applicable water quality standards. Moreover, although the Toxicity Provisions left in place narrative water quality objectives for aquatic toxicity in regional water board water quality control plans (basin plans), the Toxicity Provisions did supersede basin plan provisions and portions of the Policy for Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California (SIP) for implementing narrative water quality objectives. As such, there are currently no basin plan or SIP procedures in effect for implementing narrative water quality objectives to determine reasonable potential as required by 40 CFR § 122.44(d)(1)(ii). As a result, the Regional Board must fully implement all of the Toxicity Provisions.

E. Water Code Section 13241

Water Code section 13241 requires the Central Valley Water Board to consider the following factors in the adoption of water quality objectives.

- a. Past, present, and probable future beneficial uses of water.
- b. Environmental characteristics of the hydrographic unit under consideration, including the quality of water available thereto.
- c. Water quality conditions that could reasonably be achieved through the coordinated control of all factors which affect water quality in the area.
- d. Economic considerations;
- e. The need for developing housing within the region.
- f. The need to develop and use recycled water.

The Central Valley Water Board is not establishing water quality objectives in this Order. However, Water Code section 13263 requires the Central Valley Water Board to take into consideration the provisions of Water Code section 13241 in adopting waste discharge requirements, when such requirements are more stringent than what federal law requires. (*City of Burbank v. State Water Resources Control Bd.* (2005) 35 Cal. 4th 613.) Consideration of section 13241 factors cannot justify permit conditions that are less stringent than what federal law requires. (*Id.* at 626.) The manner in which the Central Valley Water Board considers section 13241 factors is within the board's discretion. (*City of Duarte v. State Water Resources Control Board* (2021) 60 Cal.App.5th 258, 273, as *modified on denial of reh'g* (Feb. 19, 2021), *review denied* (Apr. 28, 2021), citing *City of Arcadia v. State Water Resources Control Bd.* (2010) 191 Cal.App.4th 156, 177, and *City of Arcadia v. State Water Resources Control Bd.* (2006) 135 Cal.App.4th 1392, 1415.)

The Central Valley Water Board finds that each of the requirements in the Order are not more stringent than what federal law requires for the control of MS4 discharges of pollutants in the Central Valley Region. The Central Valley Water

Board makes additional findings with respect to specific program areas throughout the Fact Sheet.

Clean Water Act section 402(p)(3)(B) requires MS4 permits to include requirements to effectively prohibit non-stormwater discharges through the MS4 to receiving waters, as well as "controls to reduce the discharge of pollutants to the maximum extent practicable, including management practices, control techniques and system, design and engineering methods, and such other provisions as the Administrator or the State determines appropriate for the control of such pollutants." The permitting agency, be it the Central Valley Water Board or U.S. EPA, must therefore include provisions when it finds it is appropriate to do so and to exercise its discretion to determine what permit conditions are necessary to control pollutants in a specific geographic area.

MS4 discharges in the Central Valley Region are a continuing and significant source of pollutants to receiving waters, many of them impaired. As such, the Central Valley Water Board finds that inclusion of all of the requirements in the Order is necessary and appropriate to control MS4 discharges in the Central Valley Region. These requirements include but are not limited to requirements for non-stormwater discharges, technology and water quality-based effluent limitations, TMDLs, receiving water limitations, stormwater management program minimum control measures, and monitoring and reporting to ensure that the requirements of the Order are being met.

To the extent the requirements in the Order may be more specific or detailed than those enumerated in federal regulations under 40 CFR § 122.26 or in U.S. EPA guidance, the requirements have been designed to be consistent with and within the federal statutory mandates described in Clean Water Act section 402(p)(3)(B) and the related federal regulations and guidance. Consistent with federal law, all the requirements in the Order could have been included in a permit adopted by U.S. EPA in the absence of California's delegated authority to issue NPDES permits. (See *Defenders of Wildlife v. Browner* (9th Cir. 1999) 191 F.3d 1159, 1166.) Each of the requirements in the Order, especially when implemented together, constitutes the critical means towards achieving the requirements and goals of the Clean Water Act. The discussion above provides the rationale for each section of the permit, including citations to federal authority.

The inclusion of numeric Water Quality-Based Effluent Limitations (WQBELs) in this Order (e.g., WLAs and related TMDL requirements) does not cause this Order to be more stringent than federal law. This is discussed further in Section IX.B of this Fact Sheet.

Similarly, the Central Valley Water Board is not required to consider the factors in Water Code section 13241 to adopt permit requirements necessary for the effective prohibition of non-stormwater discharges into the MS4; or for controls necessary to reduce the discharge of pollutants in stormwater to the MEP; or

other provisions that the Central Valley Water Board has determined appropriate. These general requirements are required by federal law.

This Order includes monitoring and reporting requirements that are designed to demonstrate that the Permittees are complying with the municipal stormwater requirements of the CWA. CWA section 308(a) and 40 CFR section 122.41(h), U) through (I); 122.44(i); and section 122.48 require that NPDES permits specify monitoring and reporting requirements. Monitoring and reporting requirements are also required by 40 CFR sections 122.26(d)(1)(iv)(D); 122.26(d)(1)(v)(B); 122.26(d)(2)(i)(F); 122.26(d)(2)(iii)(D); 122.26(d)(2)(iv)(B)(2); and 122.42(c).

Therefore, since the Central Valley Water Board determines that each of the requirements in the Order are not more stringent than what federal law requires, there is no legal requirement for the Central Valley Water Board to consider the factors of California Water Code section 13241.

Notwithstanding the above, the Central Valley Water Board has considered the factors set forth in California Water Code section 13241 in issuing the Order. The Central Valley Water Board's consideration of each of the factors is provided below. The Central Valley Water Board has also considered all the evidence that has been presented to the Board regarding section 13241 factors in issuing the Order. This includes specific costs of compliance information presented to the Central Valley Water Board by Permittees and stakeholders.

Having considered the factors in California Water Code section 13241, the Central Valley Water Board finds that the requirements in the Order are necessary to ensure the reasonable protection of beneficial uses of waterbodies in the Central Valley Region and the prevention of nuisance. None of the factors of section 13241, including costs of compliance, is sufficient to justify failing to protect those beneficial uses. Nor is it sufficient to justify omitting any requirement in the Order, as the Central Valley Water Board finds that doing so would unreasonably affect the designated beneficial uses of the region's waters. Additionally, it would be wholly inconsistent with federal requirements not to include requirements in the Order that the Central Valley Water Board has deemed necessary for the control of MS4 discharges in the Central Valley Region. Where appropriate, the Central Valley Water Board has provided Permittees with additional time to implement control measures to achieve final WQBELs and/or receiving water limitations. In addition, the Central Valley Water Board has provided significant flexibility for Permittees to choose how to implement the requirements of the Order, including by working with other Permittees to implement cost-effective control measures. The Order allows Permittees the flexibility to address critical water quality priorities, namely discharges to waters subject to TMDLs. The Order aims to do so in a focused and cost-effective manner while maintaining the level of water quality protection mandated by the Clean Water Act.

In addition, the Office of Research, Planning, and Performance (ORPP) is preparing guidance in response to a March 2018 Audit Report of the State Water Board by the Governor's Office. The report suggested that the Water Boards have not adequately considered the cost of implementing pollution control requirements.

1. Past, Present, and Probable Future Beneficial Uses of Water

Chapter 3 of both Central Valley Water Board Basin Plans identifies existing and potential beneficial uses for surface water bodies in the Central Valley Region, which are the receiving waters for MS4 discharges. The Basin Plans note that a "potential" beneficial use is the same as a "probable future" beneficial use for purposes of Water Code section 13241 factors. A potential beneficial use may be established because plans already exist to put the water to that use or because conditions, such as location and demand, make such future use likely. The establishment of a potential beneficial use protects the quality of that water for potential future use. More information about beneficial uses is available in section F2.C of this Fact Sheet.

Pollutants in discharges from MS4s have damaging effects on both human health and aquatic and riparian ecosystems. Water quality assessments conducted by the Central Valley Water Board have identified impairment of beneficial uses of water bodies in the Central Valley Region. Pollutants in MS4 discharges cause or contribute to many of these impairments. As a result, there are beach postings, fish consumption advisories, ecosystem and recreational impacts from pathogens, trash and debris, and toxic conditions for aquatic life, among others. Twelve TMDLs established by the Central Valley Water Board and U.S. EPA identify MS4 discharges as one of the sources causing or contributing to impairments of beneficial uses in the Central Valley Region. The requirements of the Order are necessary to protect and restore the past, present, and probable future beneficial uses of surface waters in the region.

2. Environmental Characteristics of the Hydrographic Unit Under Consideration Including the Quality of Water Available Thereto

The hydrologic unit under consideration is the Central Valley River Basin, which is broken down into subbasins, watersheds, and subwatersheds. Environmental characteristics of the subbasins and watersheds covered by the Order are discussed in section F1.C of this Fact Sheet. Additional information on impaired waters in the Central Valley Region can be found in the State's Clean Water Act [section 303\(d\) List of impaired waters](https://www.waterboards.ca.gov/water_issues/programs/water_quality_assessment/): (https://www.waterboards.ca.gov/water_issues/programs/water_quality_assessment/).

3. Water Quality Conditions that Could Reasonable be Achieved Through the Coordinated Control of All Factors Which Affect Water Quality in the Area

Subsection (c) of section 13241 provides for the consideration of "[w]ater quality conditions that could reasonably be achieved through the coordinated control of all factors which affect water quality in the area."

The Central Valley Water Board considers water quality conditions that could reasonably be achieved through the coordinated control of all factors that affect water quality, when establishing water quality objectives, TMDLs, and TMDL programs of implementation in its Basin Plan. This Order implements the Basin Plan and other applicable water quality control plans. Therefore, this Order considers water quality conditions that could reasonably be achieved (i.e. water quality objectives) by incorporating the water quality objectives established in those plans.

The Central Valley Water Board has established and incorporated TMDLs in the Basin Plan. As discussed in section F6 of this Fact Sheet, the Central Valley Water Board implements the TMDLs, in part, by incorporating the WLAs and other requirements as WQBELs in the Order to achieve water quality objectives.

The Central Valley Water Board finds that water quality conditions necessary to support beneficial uses are reasonably achievable through coordinated control of all factors which affect water quality. Where MS4 discharges are a significant factor, compliance with the requirements of the Order, alongside control of all other controllable factors, is necessary to achieve water quality conditions that support beneficial uses.

4. Economic Considerations

Section 13241(d), when applicable, requires the Central Valley Water Board to address economic considerations. For waste discharge requirements that serve as NPDES permits, this requirement only applies to those provisions that are more stringent than federal law. (City of Burbank v. State Water Resources Control Bd. (2005) 35 Cal. 4th 613.) The Central Valley Water Board has nevertheless not limited its discussion of economic considerations to those provisions that are more stringent than what federal law requires.

In considering economics, it is not necessary for the Central Valley Water Board to perform a cost-benefit analysis or other formal economic analyses. Performing a formal economic analysis is not currently practical. This is principally because of the lack of comprehensive or sufficiently reliable economic data on costs. Calculating the value of benefits is typically more difficult because benefits tend to be intangible. Methods for calculating

benefits, such as surveys to estimate the recreational value of a day at the beach or the intrinsic value of wildlife, are infrequently performed and costly. However, the Central Valley Water Board will consider what limited economic information is available and will rely on economic analyses conducted by the Santa Ana Regional Board in their 2024 Regional MS4 Permit.

The USEPA, the State Water Board, and the regional water quality control boards have attempted to evaluate the costs and benefits of municipal stormwater programs. The resulting studies show a large variability in reported costs and that there is difficulty in obtaining reliable cost information.

In 1999, the USEPA summarized the conclusions of multiple studies performed to determine the cost of stormwater management programs as part of its Phase II expansion of the NPDES stormwater program⁶⁴. The USEPA determined that the range of benefits from its Phase II expansion exceeds the range of regulatory costs. As part of their analysis, the USEPA reported that, based on appropriate cost data provided by 26 MS4 operators subject to Phase I, the average annual program costs were \$ 16.30 per household (2022 dollars)⁶⁵. The USEPA also reported that the average annual Phase II program costs were \$16.45 per household (2022 dollars), comparable to per household costs of the Phase I program.

In 2003, staff of the Los Angeles Regional Water Quality Control Board performed a study of Phase I MS4 program costs⁶⁶. Self-reported cost data provided in the MS4 operators' annual reports was used. The average annual cost in Los Angeles County was estimated to be \$12.50 per household (2002 dollars) which equates to \$20.33 in 2022 dollars.

In 2005, the State Water Board commissioned a study by the California State University, Sacramento to assess costs of the Phase I MS4 program throughout the state⁶⁷. The annual cost ranged from \$18 to \$46 per household (2005 dollars), which equates to \$28.01 to \$71.59 in 2022 dollars.

For comparison purposes, the per household cost information above have been adjusted for inflation using the United States Bureau of Labor Statistics'

⁶⁴ Federal Register/Vol. 64 No. 235/Wednesday, December 8, 1999/Rules and Regulations. P. 68791-68792.

⁶⁵ USEPA's cost estimates should be regarded as gross indicators of compliance costs, not actual compliance costs. See Government Accountability Office, May 2007. Further Implementation and Better Cost Data Needed to Determine Impact of EPA's Storm Water Program on Communities. GAO-07-479.

⁶⁶ Los Angeles Water Quality Control Board, 2003. Review and Analysis of Budget Data Submitted by the Permittees for Fiscal Years 2000-2003. P. 2.

⁶⁷ State Water Resources Control Board, 2005. NPDES Stormwater Cost Survey. p. ii.

Consumer Price Index Calculator. All values were adjusted to 2022 dollars. The results are summarized in Table F.1 below.

Table F.1: Comparison of Estimates of Annual MS4 Program Costs (per household)

Study	Reported Value(s)	Inflation-Adjusted Value (2022 dollars)
USEPA, 1999	\$9.08 (Phase I) \$9.16 (Phase II)	\$16.40 (Phase I) \$16.55 (Phase II)
Los Angeles Regional Water Quality Control Board, 2003	\$12.50	\$20.42
State Water Resources Control Board, 2005	\$18 to \$46	\$28.01 to \$71.59

An economic analysis of the cost of the Phase I program could involve a comparison of the MS4 operators' costs with and without the Phase I program. The result would be marginal costs. Many of the reported Phase I program costs are not attributed solely to the program. In many cases, program elements such as street sweeping and litter control are services that have been performed by the Permittees long before they were required by any Clean Water Act permit.

Therefore, the actual costs of the Phase I program for a Permittee are a portion of the reported costs. The State Water Board's 2005 study, discussed earlier, estimated that 38% of the reported program costs could be fully attributed to the MS4 permits. The remainder was attributed to the costs of pre-existing services provided by the Permittees.⁶⁸

Water Code section 13241 includes the need to consider "economic considerations" under certain circumstances. Economic considerations include both the costs of compliance and the economic benefit of protecting the beneficial uses of the waters of the State. There is some information available to estimate the costs of MS4 permits. However, information is not as available for estimating the benefits of protecting beneficial uses. Some beneficial uses, such as Industrial Process Supply, for example, may have their value more readily monetized because there is a well-established market for the resource.

For other beneficial uses, monetizing their value is much more difficult largely because the benefits are intangible. Certain techniques, such as Willingness to Pay and Travel Cost Analysis, have been employed by the USEPA at a

⁶⁸ *Id.*, p. 58.

national scale to value such things as beach recreation (a proxy for Water Contact and Non-Water Contact Recreation beneficial uses). But these techniques are more costly, typically requiring surveys of users or potential users. As a result, they are infrequently employed. However, two studies are useful in this analysis.

As part of their Phase II expansion of the NPDES program, the USEPA estimated that willingness to pay for improvements in freshwater quality for fishing and boating is approximately \$158 to \$210 per household (1998 dollars), which equates to \$290.19 to \$385.69 in 2022 dollars⁶⁹. Another study, conducted by California State University, Sacramento, reported that the annual household willingness to pay for state-wide clean water is approximately \$180 per household (2005 dollars), which equates to \$280.14 in 2022 dollars⁷⁰.

In accordance with the Central Valley Region's previous MS4 Permits, Permittees reported their annual expenditures for compliance with stormwater requirements in their Fiscal Year 22/23 Annual Progress Reports, which ranged from \$150,000 - \$39,000,000. The expenditures are not comparable between counties due to the variability in population and geographic size of the jurisdictions, program elements, and compliance and accounting methods.

A study conducted by USC/UCLA assessed the costs and benefits of implementing various approaches for achieving compliance with the MS4 Permits in Los Angeles Region⁷¹. The study found that source control systems would cost \$3.22 billion but provide \$6.44 billion in benefits. The study also found that treatment systems would cost \$6.56 billion to \$8.51 billion, while benefits could reach \$20.71 billion. These values have been adjusted to 2022 dollars.

5. TMDL Compliance Costs

In 2001, USEPA estimated the annual costs of implementing TMDLs for 20,000 waterbodies across the country (EPA 841-D-01-003, August 1, 2001)⁷². Table F.2 shows the estimated annual costs of implementation in 2022 dollars.

⁶⁹ *Ibid.* p. 68793

⁷⁰ State Water Resources Control Board, 2005. NPDES Storm Water Cost Survey. p. iv.

⁷¹ LARWQCB, 2004. Alternative Approaches to Stormwater Control.

⁷² USEPA, 2001. The national costs of the total maximum daily load program (draft report). Office of Water (4503F), Washington DC 20460, EPA 841-D-01-003, August 1, 2001.

Table F.2: Adjusted USEPA Compliance Cost Estimates/Year

Program Type	Costs (2022 dollars) in Billions
Least Flexible ⁷³	\$ 3.22- \$ 7.28
Moderately Cost Effective ⁷⁴	\$ 1.69-\$ 5.76
Most Cost Effective ⁷⁵	\$ 0.24 - \$ 0.40

In November 2010, USEPA estimated the annual cost of implementing the nutrient numeric TMDL in the State of Florida's lakes and flowing waters to be between \$60.5 Million to \$108 Million dollars, which equates to annual cost of between \$82.87 Million and \$147.93 Million in 2022 dollars.

In 2005, the Office of Water Programs (OWP) at Sacramento State, the University of Southern California, the University of California Los Angeles (UCLA), the California State Water Resources Control Board (State Water Board), and the Regional Water Quality Control Boards (Regional Water Boards) surveyed six municipalities to estimate costs for compliance with permit requirements⁷⁶. Currier et al. (2005) reported the survey results and found that communities spent between \$25.15-\$64.27 (2022 dollars) per household.

In a 2014 study, the Public Policy Institute of California estimated stormwater funding needs in the range of \$1.17-\$1.75 billion (2022 dollars) across the state⁷⁷. The value was derived based on extrapolating detailed data for a few

⁷³ This scenario explores what costs to pollutant sources would result if the nation chose to restore the currently impaired waters under a TMDL program in which every source affecting an impaired water would be required to implement further control measures, rather than a more calibrated approach.

⁷⁴ This scenario differs from the first scenario in that it assumes the use of a more careful TMDL process, including non-uniform and flexible allocation among sources to achieve cost effective reductions.

⁷⁵ This scenario recognizes the possibility of reducing TMDL costs to point source dischargers through either additional "cost-effective wasteload allocations" or through trading, or both.

⁷⁶ Currier, B.K., et al. 2005. NPDES Stormwater cost survey: final report. Office of Water Programs, California State University, Sacramento, Prepared for the California State Water Resources Control Board, January 2005.

⁷⁷ Hanak, Ellen, Brian Gray, Jay Lund, David Mitchell, Caitrin Chappelle, Andrew Fahlund, Katrina Jessoe, et al. 2014. Paying for Water in California. Public Policy Institute of California.

case study communities. Hanak et al. (2014) estimated costs to be between \$638.12-\$1,020.99 million (2022 dollars) annually across communities.

USEPA (May 2020) estimated the TMDL costs of compliance In California⁷⁸. Spending by geographic Regions revealed noticeable trends in spending and data availability. The analysis aggregated data for MS4s in a region according to Regional Water Quality Control Board boundaries. Table F.3 shows the regional expenditures.

Table F.3: Adjusted USEPA Compliance Cost Estimates per Region

Regions	Expenditures in Millions (2022 dollars)
Region 1 - North Coast	\$1.05
Region 2 - San Francisco Bay	\$8.27
Region 3 - Central Coast	\$5.77
Region 4 - Los Angeles	\$376.05
Region 5 - Central Valley	\$175.49
Region 6 - Lahontan	Not Reported
Region 7 - Colorado River Basin	\$0.19
Region 8 - Central Valley	\$162.96
Region 9 - San Diego	\$225.64
Total All Regions	\$965.18

The Los Angeles Water Board compiled the cost of complying with TMDL waste load allocations assigned to MS4 discharges in a staff memo titled "2020 Regional MS4 TMDL Compliance Costs," dated July 17, 2020 (TMDL Staff Report Cost Memo). Using costs estimated during the establishment of TMDLs, the TMDL Staff Report Cost Memo estimated the total capital cost of implementing the 45 TMDLs included in the Order to be \$5.75 Billion with total annual operation and maintenance (O&M) costs of \$482.29 Million. The total 20- year costs add up to \$15.62 Billion in 2022 dollars.

This economic consideration provides a summary of costs associated with the reasonably foreseeable means of compliance with stormwater requirements. This economic consideration combines an array of cost

⁷⁸ Environmental Finance Center at Sacramento State, 2020. Estimating benefits and costs of stormwater management. Part II: Evaluating municipal spending in California. USEPA Region 9 EFC, OWP at Sacramento State, Sacramento, May 2020.

estimates and examples and considers various means of compliance. The costs considered demonstrate the range of costs the Permittee may face in selecting compliance strategies.

The Central Valley Water Board has provided the Permittees significant flexibility to choose how to implement this Order. This allows the Permittees the opportunity to evaluate and improve their stormwater program while reducing the cost of compliance.

The Central Valley Water Board finds that the requirements of this Order are reasonably necessary to protect beneficial uses identified in the Basin Plan and the economic information related to costs of compliance supports protecting those beneficial uses.

6. The Need for Developing Housing Within the Region

The population of the Central Valley is anticipated to grow by 5 million people by 2060. An increase in population creates a higher demand for water, exacerbates usage of natural resources, and increases generation of waste and pollution. To protect human health and the environment, create economic opportunities, and provide attractive and affordable neighborhoods, U.S. EPA encourages smart growth and Low Impact Development (LID). According to U.S. EPA, using smart growth and LID strategies, communities and developers can reduce runoff quantity, protect water quality, and conserve water by developing compactly, preserving ecologically critical open space, and using green infrastructure strategies. (add citations)

The Order contains requirements that support LID practices to protect water quality. LID practices generally increase the local water supply by adding higher quality stormwater runoff to receiving waters and reducing dependence on imported water. High quality water addresses the water needs associated with increasing housing demand. LID attempts to replicate the natural hydrology of the site, increasing infiltration and reducing pollutant loads in runoff over traditional development, and thereby reduces negative impacts of development on water quality. The LID requirements of the Order emphasize the necessity to balance growth with sustainable water resource management.

7. The Need to Develop and Use Recycled Water

Water Code section 13050(n) defines recycled water as "water which, as a result of treatment of waste, is suitable for a direct beneficial use or a controlled use that would not otherwise occur and is therefore considered a valuable resource." Harvested stormwater does not meet the definition of recycled water since it is not treated.

California's water supply is anticipated to diminish by up to 10% by 2040 as a result of a hotter, drier climate. In anticipation of a reduced water supply, California's 2022 Water Supply Strategy (the Strategy) calls for increasing recycled water use and stormwater capture to 1.8 million and 0.5 million acre-feet per year, respectively, by 2040.

Increasing recycled water and harvested stormwater are the two main sources of new water supply in the Strategy. Harvested stormwater may, in some cases, reduce demand for recycled water. This may be the case during winter months when the supply of both harvested water and recycled water exceed demand and storage of either is not cost effective. Nevertheless, both recycled water and harvested stormwater provide water supply benefits in alignment with public policy objectives.

F. State Mandates⁷⁹

Article XIII B, section 6(a) of the California Constitution provides that whenever “any state agency mandates a new program or higher level of service on any local government, the state shall provide a subvention of funds to reimburse that local government for the costs of the program or increased level of service.” No provision of the Order constitutes a reimbursable state mandate under Article XIII B, section (6)(a) of the California Constitution.

1. *Permittees Have Authority to Fund Permit Compliance Costs Through Service Charges, Fees, or Assessments.*

As a threshold matter, even if any of the Order’s provisions could be considered state mandates, they are not eligible for reimbursement because the Permittees can levy service charge, fees, or assessments sufficient to pay for compliance with the Order. (Gov. Code, § 17556, sub. (d).) Article XIII D, section 6, of the California Constitution, known as Proposition 218, is not an impediment to the Permittees’ fee authority.

First, Proposition 218 does not apply to fees or service charges unrelated to real property, such as fees for development permits, other fees imposed on real property development, and fees for inspections incident to permitting. (Cal. Const. Art. XIII D, § 1, subd. (b), § 2, subd. (b), ¶ 3; *Department of Finance v. Commission on State mandates* (2022) 85 Cal.App.5th 535, 587 (*San Diego MS4 Permit*); *Department of Finance v. Commission on State Mandates* (2021) 59 Cal.App.5th 546, 561-62.) Permittees have the authority to recover through regulatory fees their costs of implementing **Attachments J and K** of the Order, including such “overhead” costs as developing guidance

⁷⁹ This section includes a brief discussion of mandates law based on statutory and case law as of the date the Order was issued. References to a specific permit provision are not intended to be exhaustive. The omission of any particular provision from this discussion does not suggest that the Central Valley Water Board believes that provision to constitute a reimbursable state mandate.

documents, developing construction ordinances, assessing program effectiveness; and related staff training, and recordkeeping and reporting costs found elsewhere in the Order. (See, *San Diego MS4 Permit*, 85 Cal.App.5th at pp. 551, 581-582, 588-595.)

Second, the voter approval requirements of Proposition 218 do not apply to “fees or charges for sewer, water, and refuse collection services.” (Cal. Const. Art. XIII D, § 6, subd. (c).)⁸⁰ “Water” for purposes of articles XIII C and XIII D, means “water from any source.” (Gov. Code, § 53750, subd. (n).) “Sewer” includes “systems, all real estate, fixtures, and personal property owned, controlled, operated, or managed in connection with or to facilitate sewage collection, treatment, or disposition for sanitary or *drainage purposes*, including lateral and connecting sewers, interceptors, trunk and outfall lines, sanitary sewage treatment or disposal plants or works, drains, conduits, outlets *for surface or storm waters*, and any and all other works, property, or structures necessary or convenient for the collection or disposal of sewage, industrial waste, *or surface or storm waters*.” (Gov. Code, § 53750, subd. (k) (emphasis added); see also, § 53751 (Legislative declarations.) Such fees are subject only to Proposition 218’s majority protest procedures. (Cal. Const. Art. XIII D, §6, subd. (c); Gov. Code, § 53750 et seq.) The majority protest procedure does not eviscerate a local agency’s authority to levy fees for purposes of determining whether compliance costs are reimbursable. (*San Diego MS4 Permit, supra*, 85 Cal.App.5th at p. 581, citing *Paradise Irrigation Dist. v. Commission on State Mandates* (2019) 33 Cal.App.5th 174, 192-195.)⁸¹

Permittees thus have adequate authority under their police powers to levy service charges, fees or assessments to cover *all* costs of complying with the Order. (See, Cal. Const., art. XI, § 7; *Freeman v. Contra Costa County Water Dist.* (1971) 18 Cal.App.3d 404, 408 (preventing water pollution is a valid exercise of police power).) Permittees likewise have fee authority for “services and facilities furnished ... in connection with its ... storm drainage ...system.” (Health & Safety Code, § 5471, subd. (a).) And they have fee authority for “[a]spects of solid waste handling which are of local concern, including, but not limited to, frequency of collection, means of collection and transportation, level of services, charges and fees, and nature,

⁸⁰ Such authority is also undiminished by Proposition 26, which specifically excludes assessments and property-related fees imposed in accordance with Proposition 218 from the definition of taxes. (Cal. Const., art. XIII C, § 1, subd. (e)(7).)

⁸¹ Permittees had fee authority adequate to fund all requirements related to refuse collection, including associated monitoring and reporting requirements, independent of the amendments to Government Code section 53750. (*San Diego MS4 Permit, supra*, at pp. 551, 581-582.) This authority would extend to all new requirements implanting the statewide Trash Provisions.

location, and extent of providing solid waste handling services.” (Pub. Res. Code, § 40059, subd. (a)(1).)

2. *New or Modified Permit Requirements Do Not Mandate New Programs or Higher Levels of Service*

“Programs” for purposes of Article XIII B, section 6, are: (1) programs that carry out the governmental function of providing services to the public, or (2) laws which, to implement a state policy, impose unique requirements on local governments and do not apply generally to all residents and entities in the state. (*San Diego MS4 Permit, supra*, at p. 555, citing *San Diego Unified School Dist. v. Commission on State Mandates* (2004) 33 Cal.4th 859, 874.) The term “higher level of service” refers to “state mandated increases in the services provided by local agencies in existing programs.” (*Ibid.*, internal quotations deleted.) A higher level of service requires “an increase in the actual level or quality of government services provided,” not merely a change that increases the cost of providing services. (*San Diego Unified School Dist.* at p. 877; *County of Los Angeles v. Commission on State Mandates* (2003) 110 Cal.App.4th 1176, 1191, quoting *Workers’ Compensation Mandates Decision, supra*, 43 Cal.3d. at p. 55.)

(b) Requirements that are also found in other stormwater permits are not unique to local government.

Some of the Order’s requirements are the same as those found in State Water Board Orders WQ 2022-0057-DWQ (NPDES General Permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities) (“CGP”), WQ 2015-0122- DWQ (NPDES General Permit for Storm Water Discharges Associated with Industrial Activities) (“IGP”), and 2022-0033-DWQ (NPDES Statewide Stormwater Permit and Waste Discharge Requirements for State of California Department of Transportation (“Caltrans Permit”). These permits cover, respectively, discharges from public and private construction and industrial sites and CalTrans’ MS4s. These requirements are not unique to local government and are therefore not a “program.”

For example, the Trash Provisions apply to all stormwater dischargers subject to NPDES permitting requirements. (Trash Provisions, §§ IV.A.2 and A.3.c [inland]; Ocean Plan, §§ III.I.6 and L.2.C.) Both the CGP and Caltrans Permit prohibit the discharge of trash and require compliance with statewide Trash Provisions. (CGP, provision IV.B.4; Caltrans Permit, provision 3.3 and Attachment E. The IGP has not been updated since the Trash Provisions were adopted.). In another example, section XIV.B.9 requires that Permittees use effective controls that prevent materials or waste associated with municipal

facilities or activities from being dispersed by wind or stormwater runoff. This requirement is based on similar requirements in the CGP. (CGP, Attachments D and E, §§ II.A.2.d. and g., II.A.4.a.)

(c) TMDL-based requirements

The TMDL-based requirements in the Order do not require a new program or a higher level of service. MS4 permits issued since 1999 have prohibited discharges that cause or contribute to exceedances of water quality standards in the receiving water, as required by State Water Board Order WQ 99-05. (See, Order No. R8-2002-0010 (Orange County); Order No. R8-2002-0011 (Riverside County); Order No. R8-2002-0012 (San Bernardino County).) TMDL provisions, including federally-required WQBELs, simply provide a process for meeting this requirement, generally based on a compliance schedule that provides Permittees additional time to comply with existing receiving water limitations.

In addition, the federal requirement to comply with TMDL-based WQBELs is not unique to local government. This requirement applies to any stormwater or non-stormwater NPDES permittee assigned a wasteload allocation. (40 CFR §§ 122.44(d)(1)(vii)(B); 130.3(h).)

(d) Non-stormwater discharge prohibition

The CWA has long required that all dischargers, including private industrial dischargers and local governments, effectively prohibit “all types” of non-stormwater discharges identified as sources of pollutants to waters of the United States. (33 U.S.C. § 1342(p)(3)(B)(ii); 40 C.F.R. § 122.26(d)(2)(iv)(B)(1).) In addition, MS4 dischargers must demonstrate adequate legal authority, through ordinance, permit, or other means, to prohibit illicit discharges from others to the MS4. (40 C.F.R. § 122.26(d)(2)(i)(B).) As a result, the Permittees have been subject to these requirements since 2016. (Order No. R5-2016-0040.)

The requirements associated with effectively prohibiting non-stormwater discharges do not change or increase the level or quality of service already required by law; they simply require the Permittees to comply with existing federal law to prohibit non-stormwater discharges to waters of the United States.

Finally, non-municipal dischargers of stormwater are also subject to the non-stormwater prohibition. (CGP, provisions IV.A (authorized non-stormwater discharges), IV.B.3. (non-stormwater prohibition), IV.B.4 (trash prohibition); IGP, provisions III.B (non-stormwater prohibitions), IV.A (authorized non-stormwater discharges); Caltrans Permit, provisions 3.9 (non-stormwater prohibition) and 3.3, and Attachment E

(trash prohibition).) These permits cover, respectively, discharges from public and private construction and industrial sites and CalTrans' MS4s. Thus, the non-stormwater prohibition is not unique to local government and is not a "program."

(e) Discretionary projects

Building standards that are not unique to local governments do not meet the definition of a "program." In addition, requirements for stormwater controls on municipal development or redevelopment projects are not mandates because Permittees are under no legal or practical compulsion to construct or operate such facilities but rather do so at their own discretion. (See, *Coast Community College Dist. v. Commission on State Mandates* (2022) 13 Cal.5th 800 [defining "legal compulsion" and "practical compulsion"].) Any costs Permittees incur to comply with LID, hydromodification, or retrofitting requirements applicable to such facilities do not constitute state mandates.

2. *The Permit Requirements Are Non-Reimbursable Federal Mandates*

Even if some of the Order's requirements could be considered a new program or higher level of service, those requirements are required to meet the standards set forth in the federal Clean Water Act and implementing regulations and are therefore non-reimbursable federal mandates.⁸²

If a requirement is mandated by a federal law or regulation and the federal requirements result in increased costs, no reimbursement is required unless a state statute or executive order mandates costs that exceed the federal mandate. (Gov. Code, § 17556, subd. (c).) The Order implements federally mandated requirements under CWA and implementing regulations, which are not subject to reimbursement. This includes federal requirements to: (i) effectively prohibit non-stormwater discharges through the MS4 to receiving waters; (ii) reduce the discharge of pollutants in stormwater to the maximum extent practicable; (iii) include such other provisions as the Central Valley Water Board determines appropriate for the control of such pollutants; (iv) attain applicable TMDL waste load allocations; and (v) conduct monitoring and reporting.

Non-stormwater discharge prohibition: Federal law requires that an MS4 permit effectively prohibit non-stormwater discharges through the MS4 to receiving waters. (33 U.S.C. § 1342(p)(3)(B)(ii).) Regulatory exceptions for certain categories of low-threat discharges do not apply to discharges that are identified as a significant source of pollutants to waters of the

⁸² Other sections of this Fact Sheet provide additional citations to federal requirements mandating specific provisions.

United States. (40 C.F.R. § 122.26(d)(2)(IV)(B).) The Order includes various requirements to achieve the effective prohibition of non-stormwater discharges, including Sections II (Discharge Prohibitions), Attachment J and K (Illicit Discharge Detection and Elimination Program), and various education, outreach and training requirements. These requirements are compelled by federal law and are separate from the requirement to reduce the discharge of pollutants to the maximum extent practicable.

TMDL requirements: The CWA requires TMDLs be established for waterbodies that do not meet federal water quality standards. (33 U.S.C. § 1313(d).) The CWA also requires that MS4 permits include “such other provisions as the Administrator or the State determines appropriate for the control of [] pollutants.” (33 U.S.C. § 1342(p)(3)(B)(iii).) USEPA interprets this provision to mandate “controls to reduce the discharge of pollutants to the maximum extent practicable, *and where necessary water quality-based controls.*” (Phase I Stormwater Regulations, Final Rule, 55 Fed. Reg. 47990, 47994 (16 November 1990) [emphasis added]; see also *Building Industry Ass’n of San Diego County v. State Water Resources Control Bd.* (2004) 124 Cal.App.4th 866, 882-887; Phase II Stormwater Regulations, Final Rule, 64 Fed. Reg. 68722, 68737.)

Once USEPA or a state establishes a TMDL, federal law requires that NPDES permits must contain water quality-based effluent limitations (WQBELs) consistent with the assumptions and requirements of any applicable waste load allocation (WLA). (40 C.F.R. § 122.44(d)(1)(vii)(B).) Indeed, TMDLs are developed for the purpose of specifying requirements for the achievement of water quality standards in impaired waters. (33 U.S.C. § 1313(d); 40 C.F.R. § 130.7.) Associated compliance schedules must require NPDES permittees to attain WLAs as soon as possible. (40 C.F.R. § 122.47.) The Order’s requirements for attainment of TMDL WLAs are therefore compelled by federal law.

Monitoring and reporting requirements: Federal law requires that NPDES permits incorporate monitoring and reporting provisions. (33 U.S.C. §§ 1318(a), 1342(a)(2); 40 C.F.R. §§ 122.26(d)(2)(i)(F); 122.41(h), (j)-(l); 122.42(c); 122.44(i); 122.47(a)(4); 122.48.) Monitoring and reporting must be adequate to determine compliance and noncompliance with permit conditions and to report that information to permitting authorities. (*Ibid.*) This Order requires monitoring to determine compliance with receiving water limitations as part of the receiving water assessment to assess the status and trends of the water quality within the Permittee’s Jurisdictional Area. The Order also requires monitoring to determine compliance with wasteload allocations that were expressed as WQBELs for some of the TMDLs in **Attachment G**. The Order’s monitoring and reporting requirements are thus imposed pursuant to federal law.

Maximum Extent Practicable (MEP) standard: The CWA mandates that the Order “require controls to reduce the discharge of pollutants to the maximum extent practicable.” (33 U.S.C. § 1342(p)(3)(B)(iii).) *Department of Finance v. Commission on State Mandates* (2016) 1 Cal.5th 749, as modified on denial of rehearing (16 November 2016) (*Los Angeles MS4 Permit*) analyzed whether the CWA’s MEP standard required four provisions concerning trash receptacles and inspections in the 2001 Los Angeles County MS4 permit. In concluding that the provisions were not required by federal law, the Supreme Court stated that, “[h]ad the Regional Board found when imposing the disputed permit conditions, that those conditions were the only means by which the maximum extent practicable standard could be implemented, deference to the board’s expertise in reaching that finding would be appropriate.” (*Los Angeles MS4 Permit, supra*, 1 Cal.5th at p. 768.) The Supreme Court further stated that “[s]uch findings are “case specific, based among other things on factual circumstances.” (*Id.*, fn. 15.) To be entitled to deference, regional water boards must make an express finding that the particular set of permit conditions finally embodied in a given permit is required to meet that federal standard and must support that finding with evidence.

The Central Valley Water Board finds that the Order specifies requirements necessary for the Permittees to reduce the discharge of pollutants in MS4 discharges to the MEP. The Order establishes requirements for stormwater management “minimum control measures,”⁸³ including programs for public information and participation, industrial and commercial facilities, construction activities, planning and land development, public agency activities, and illicit discharge detection and elimination, among others required by 40 CFR section 122.26(d)(2)(iv). The requirements of these programs represent structural and non-structural water quality control measures that are effective, technically feasible, and generally accepted as appropriate.

Section V.C of the Order establishes a program providing an alternative compliance path through the preparation of a SWMP. SWMPs allow the Permittees to identify water quality issues and propose specific control measures to achieve the receiving water limitations and numeric WQBELs in accordance with compliance schedules that meet federal requirements. This alternative provides Permittees with flexibility to select the most cost-effective water quality control measures that will reduce pollutants in stormwater to the maximum extent practicable, comply with TMDL wasteload allocations, and meet other receiving water limitations.

⁸³ The term “minimum control measures” is borrowed from USEPA’s Storm Water Phase II Final Rule. It is not found in 40 CFR section 122.26(d)(2). The control measures the term refers to in the Phase II Final Rule are essentially the same as those in 40 CFR section 122.26(d)(2). The term is used here as a convenient way to collectively describe the control measures in 40 CFR section 122.26(d)(2).

Finally, USEPA's inclusion of equivalent or substantially similar provisions in its MS4 permits support a finding that the provisions are necessary to achieve MEP. The Central Valley Water Board has examined the following USEPA issued permits, among others, and concluded that they contain equivalent and/or substantially similar provisions: Massachusetts MS4 General Permit, Washington D.C. MS4 Permit, Middle Rio Grande (Albuquerque, NM) MS4 Watershed Permit, Boise/Garden City MS4 Permit, and Guam MS4 Permit.

The Central Valley Water Board finds that the programmatic requirements of the Order are necessary to meet the MEP standard. The mix of pollution controls and best management practices are necessary to attain the level of pollutant reduction expected by the demanding federal MEP standard, but also balances different interests such as effectiveness, regulatory compliance, public acceptance, cost, and technical feasibility. To the extent there may be multiple means of achieving pollutant reductions and that there could be trade-offs between program areas with potentially higher costs and greater pollutant reductions, the Order affords Permittees discretion to select the specific means of reducing the discharge of pollutants to the MEP based on the methodical application of performance metrics. This finding is the expert conclusion of the Central Valley Water Board based on its technical expertise and experience administering the MS4 program.

G. Hydromodification Requirements Pursuant to Federal Law

This Order contains requirements for Permittees to minimize the adverse effects of hydromodification on water quality. "Hydromodification," as the term is used in this Permit, refers to ecologically significant modification of a watershed's natural hydrograph, characterized by increased volume, velocity, rate, duration, and/or overall energy (collectively, "flow"). Hydromodification typically results from new land development that increases impervious surfaces, thereby increasing the flow of storm water runoff into the MS4 and receiving waters during storm events. Controls that minimize hydromodification impacts typically are designed to capture storm water runoff during storm events and control its release into receiving waters in a manner that approximates how the natural hydrograph would have responded to such a storm. Properly designed, installed, and maintained LID measures are a primary method to address the causes of hydromodification.

Left uncontrolled, hydromodification has the potential to increase the discharge of pollutants into waters of the United States in at least two ways. First, significantly increasing the flow of storm water runoff is associated with increased sedimentation of receiving waters, whether such sediment originates from lands surrounding the receiving water or from the bed/bank of the receiving water

itself.⁸⁴ Second, the sediment roiled by increased storm water flows can mobilize other pollutants that absorb or adsorb to sediment, thereby facilitating their deposition into waters of the United States. Such eroded sediment and sediment-bound pollutants often have adverse impacts to the quality of waters of the United States, sensitive habitat, and/or aquatic or terrestrial organisms. Significant changes to the pre-development hydrograph can also disrupt natural drainage patterns in ways that cause significant increases in water temperatures in stream segments. These and similar changes can set off further water quality impacts, such as excessive nutrient loads and corresponding drops in dissolved oxygen. This explanation is intended as an illustrative, but not exhaustive list of the ways that hydromodification can lead to the discharge of pollutants into waters of the United States.

The connection between significant increases in flow and the discharge of pollutants finds additional support in precedential State Water Board orders. For example, in the 2000 State Water Board order *In re Bellflower* (the “SUSMPs Order”), the Board considered a challenge to the Los Angeles Regional Water Board’s inclusion of numeric design criteria to manage the volume of Permittee’s urban storm water runoff. The State Water Board made the following observation regarding the new development controls:

[The controls] are aimed at limiting not just the pollutants in the runoff from the new development, but also the volume of runoff that enters the [MS4]. By limiting runoff from new development, the [controls] prevent increased impacts from urban runoff generally. There is adequate technical information in the record to show that by controlling the volume of runoff from new development, BMPs can be effective in reducing the discharge of pollutants in storm water runoff.⁸⁵

The State Water Board reiterated this concept in 2001, stating, “The Regional Water Board is appropriately concerned not only with pollutants in runoff but also the volume of runoff, since the volume of runoff can affect the discharge of

⁸⁴ Higher intensity flows can loosen sediment within the MS4’s Jurisdictional Runoff Area and cause the MS4 to discharge the sediment into waters of the United States. Additionally, higher intensity flows from an MS4 can loosen sediment that had settled in the bed and/or banks of waters of the United States, and which would have remained settled if not for increased flows from the MS4. In this manner, higher intensity flows from an MS4 can cause or contribute to discharge of sediment into waters of the United States even when the sediment is not physically present in the MS4’s effluent. See *Conway v. State Water Resources Control Board* (2015) 235 Cal.App.4th 671, ___, 185 Cal.Rptr.3d 490, 493-494 (“[O]ne can discharge a pollutant from one part of the receiving waters into another part of the same receiving waters.”).

⁸⁵ State Water Board Order WQ 2000-11, at p. 5 (emphasis added).

pollutants.”⁸⁶ The well-established connection between higher intensity flows and the discharge of pollutants puts this Region-wide Permit’s hydromodification requirements squarely within the mandates of the federal Clean Water Act. Section 402(p) of the Act provides that MS4 permits:

... shall require controls to reduce the discharge of pollutants to the maximum extent practicable, including management practices, control techniques and system, design and engineering methods, and such other provisions as the [US EPA] Administrator or the State determines appropriate for the control of such pollutants.⁸⁷

The hydromodification requirements in this Order fall within the MEP standard because they (1) are designed to effectively address pollutants of concern, (2) are technically feasible, and (3) will achieve benefits that bear a reasonable relationship to the cost of implementation. To the extent any of the hydromodification requirements in this Region-wide Permit may go beyond the MEP standard, their inclusion in this Order represents the Central Valley Water Board’s judgment that they are necessary and appropriate for the control of pollutants.

H. Water Quality Impacts in Disadvantaged or Tribal Communities and Environmental Justice Concerns

When issuing or reissuing individual waste discharge requirements or waivers of waste discharge requirements that regulate activity or a facility that may impact a disadvantaged or tribal community, and that includes a time schedule in accordance with subdivision (c) of section 13263 for achieving an applicable water quality objective, an alternative compliance path that allows time to come into compliance with water quality objectives, or a water quality variance, the state board or regional board shall make a finding on potential environmental justice, tribal impact, and racial equity considerations. For reissuances, the finding may be limited to considerations related to any changes to the requirements of the prior waste discharge requirements or waivers of waste discharge requirements. (Wat. Code, §13149.2.)

Consistent with Water Code section 13149.2, the Central Valley Water Board has taken into account environmental justice, tribal impact, and racial equity considerations in issuing this Order. The discharges regulated by the Order may impact one or more disadvantaged communities or tribal communities.

⁸⁶ State Water Board Order WQ 2001-15, at p. 12, fn. 23.

⁸⁷ 33 USC section 1342(p)(3)(B)(iii).

F3.APPLICATION REQUIREMENTS

A. Application

This Order specifies an effective date of **XX Month 2026**. To obtain authorization under this Order, the Permittee must submit to the Central Valley Water Board a complete application within the time frames specified. To be eligible, the Permittee must be located within the Central Valley region coverage area of this General Permit (**Attachment D, Map of the Central Valley Region Covered by Order R5-2026-0XXX**). A complete application consists of the following:

1. New Permittees - A Notice of Intent (NOI) (**Attachment L, Notice of Intent**) signed in accordance with the signatory requirements of the Standard Permit Provisions and General Provisions in **Attachment H**. To enroll under this General Permit, New Permittees authorized to discharge under another Central Valley Water Board or State Water Board MS4 permit that has not yet expired shall submit a NOI to the Executive Officer, or the Storm Water Multiple Application Reporting and Tracking System (SMARTS) database when available no later than thirty (30) days prior to the expiration date of its current MS4 permit. A New Permittee authorized to discharge pursuant to an administratively extended MS4 permit shall submit a NOI within thirty (30) days of the Effective Date of this Order. [40 CFR § 122.28(b)(2)(iii)]. A Permittee desiring coverage under this permit that was not previously authorized to discharge under another Central Valley Water Board or State Water Board MS4 permit shall submit a NOI at least ninety (90) days in advance of the anticipated discharge date to provide time for review of the application package (40 CFR § 122.28(b)(2)(iii)). This time period may be waived by the Executive Officer;
2. Existing Permittees - A Notice of Intent (NOI) (**Attachment O, Notice of Intent to Re-Enroll**) signed in accordance with the signatory requirements of the Standard Permit Provisions and General Provisions in **Attachment H** and a complete Annual Report for the fiscal year 2025-2026 to the Executive Officer, or the Storm Water Multiple Application Reporting and Tracking System (SMARTS) database when available within sixty (60) days of the effective date of the Order. Existing Permittees are not required to resubmit the Annual Report for fiscal year 2025-2026 with the Notice of Intent to Re-Enroll if previously submitted to the Central Valley Water Board; and
3. An application fee. A fee is required only for New Permittees enrolling for the first time. Permittees that were authorized to discharge under a prior Central Valley Water Board or State Water Board MS4 Permit and are applying for coverage under this Permit will be billed during the regular annual billing cycle.

Within ninety (90) days of receipt of an application, the Central Valley Water Board will either issue a Notice of Applicability (NOA) or deny the application if

incomplete. If an NOA is issued, the Permittee is authorized to discharge under this Order starting on the date indicated on the NOA [40 CFR 122.28(b)(2)(iii)].

On the effective date of this Order, an Existing Permittee resumes the timeline for the step in the process of their storm water management plan development outlined in **Table 3** under **Part V.G.2**

B. Fees

The [fee for enrollment](http://www.waterboards.ca.gov/resources/fees/water_quality/) under this Order shall be based on California Code of Regulations, title 23, section 2200, which is available at http://www.waterboards.ca.gov/resources/fees/water_quality/ and is payable to the State Water Board.

C. Terminating Coverage

1. To terminate permit coverage, the Permittee must submit a complete and accurate Notice of Termination (NOT) provided in **Attachment M** within thirty (30) days following permanent termination of a discharge, upon transfer of ownership to another entity, or discharges authorized under the Order to the Executive Officer. Upon Executive Officer approval of the NOT, the Permittee's authorization to discharge under this Order is discontinued. Prior to the termination effective date, the Permittee is subject to the terms and conditions of this Order and is responsible for submitting the annual fee and all reports associated with this Order.
2. The Permittee shall submit an NOT when one of the following conditions occurs:
 - a. The Permittee has ceased all discharges for which it obtained Order coverage and does not expect to discharge during the remainder of this permit term; or
 - b. The Permittee has obtained coverage under an individual permit or an alternative Order for all discharges required to be covered by an NPDES permit.

F4.RATIONALE FOR DISCHARGE PROHIBITION SPECIFICATIONS

A. Definition of Storm Water and Non-Storm Water

Federal regulations define "storm water" as "storm water runoff, snow melt runoff, and surface runoff and drainage." (40 C.F.R. section 122.26(b)(13).) While "surface runoff and drainage" is not defined in federal law, USEPA's preamble to the federal regulations demonstrates that the term is related to precipitation events, such as rain and/or snowmelt. (55 FR 47990, 47995-96 (16 November 1990)). For example, USEPA states:

In response to the comments [on the proposed rule] which requested EPA to define the term 'storm water' broadly to include a number of

classes of discharges which are not in any way related to precipitation events, EPA believes that this rulemaking is not an appropriate forum for addressing the appropriate regulation under the NPDES program of such non-storm water discharges....Consequently, the final definition of storm water has not been expanded from what was proposed.

(*Ibid.*) The storm water regulations themselves identify numerous categories of discharges including landscape irrigation, diverted stream flows, discharges from drinking water supplier sources, foundation drains, air conditioning condensation, irrigation water, springs, water from crawl space pumps, footing drains, lawn watering, individual residential car washing, and street wash water as “non-storm water.” While these types of discharges may be regulated under storm water permits, they are not considered storm water discharges. (40 CFR section 122.26(d)(2)(iv)(B)). USEPA states that, “in general, municipalities will not be held responsible for prohibiting some specific components of discharges or flows ... through their municipal separate storm sewer system, *even though such components may be considered non-storm water discharges...*” (emphasis added). However, where certain categories of non-storm water discharges or specific non-storm water discharges are identified by the Permittee (or the Regional Water Board) as needing to be addressed, these discharges are no longer exempt and become subject to the effective prohibition requirement in CWA section 402(p)(3)(B)(ii). This review of the storm water regulations and USEPA’s discussion of the definition of storm water in its preamble to these regulations strongly supports the interpretation that storm water includes only precipitation-related discharges. Therefore, non-precipitation related discharges are not storm water discharges and, therefore, are not subject to the MEP standard in CWA section 402(p)(3)(B)(iii). Rather, non-storm water discharges shall be effectively prohibited pursuant to CWA section 402(p)(3)(B)(ii).

B. Regulatory Background

The CWA employs the strategy of prohibiting the discharge of any pollutant from a point source into waters of the United States unless the discharger of the pollutant(s) obtains an NPDES permit pursuant to CWA section 402. The 1987 amendment to the CWA included section 402(p) that specifically addresses NPDES permitting requirements for municipal discharges from MS4s. Section 402(p) prohibits the discharge of pollutants from specified MS4s to waters of the United States except as authorized by an NPDES permit and identifies the substantive standards for MS4 permits. MS4 permits (1) “shall include a requirement to effectively prohibit non-storm water discharges into the storm sewers” and (2) “shall require controls to reduce the discharge of pollutants to the MEP, including management practices, control techniques and system, design and engineering methods, and such other provisions as the Administrator or the State determines appropriate for the control of such pollutants.” (CWA § 402(p)(3)(B)(ii-iii).)

C. Storm Water Discharge Prohibitions

Part II.A.1 of this Order prohibits MS4 discharges in a manner causing or contributing to a condition of pollution, contamination or nuisance. **Part II.A.2** of this Order incorporates by reference any and all prohibitions in the Central Valley Water Board's basin plans that may apply to the MS4 Permittee.

As noted above, CWA section 402(p)(3)(B) requires MS4 permits to require, among other provisions, "such other provisions as the Administrator or the State determines appropriate for the control of ... pollutants [in storm water]." Water Code section 13377 requires that,

"[n]otwithstanding any other provision of this division, the state board or the regional boards shall, as required or authorized by the [CWA], as amended, issue waste discharge requirements and dredged or fill material permits which apply and ensure compliance with all applicable provisions of the act and acts amendatory thereof or supplementary, thereto, together with any more stringent effluent standards or limitation necessary to implement water quality control plans, or for the protection of beneficial uses, or to prevent nuisance."

Including storm water prohibitions in this Order that incorporate (i) applicable basin plan prohibitions, and (ii) a prohibition on creating a condition of pollution, contamination or nuisance, appropriately implement applicable basin plans and are necessary for the protection of beneficial uses. Accordingly, the Central Valley Water Board has determined that these prohibitions are an appropriate method of controlling pollutants in municipal storm water pursuant to CWA section 402(p)(3)(B).

D. Non-Storm Water Discharge Prohibitions

Consistent with federal law, **Part II.B** of this Order contains a prohibition on non-storm water discharges to the MS4, where such discharges are not conditionally authorized. On November 16, 1990, USEPA published regulations to implement the 1987 amendments to the CWA. (55 Fed. Reg. 47990 (16 November 1990)). The regulations establish minimum requirements for MS4 permits. The regulations address both storm water and non-storm water discharges from MS4s; however, the minimum requirements for each are significantly different. This is evident from USEPA's preamble to the storm water regulations, which states that "Section 402(p)(B)(3) [of the CWA] requires that permits for discharges from municipal separate storm sewers require the municipality to "effectively prohibit" non-storm water discharges from the municipal storm sewer. Ultimately, such non-storm water discharges through a MS4 must either be removed from the system or become subject to an NPDES permit." (55 Fed Reg. 47990, 47995 (November 1990)). USEPA states that MS4 Permittees are to begin to fulfill the "effective prohibition of non-storm water discharges" requirement by: (1) conducting a screening analysis of the MS4 to provide information to develop priorities for a program to detect and remove illicit discharges, (2) implementing a

program to detect and remove illicit discharges, or ensure they are covered by a separate NPDES permit, and (3) to control improper disposal into the storm sewer. (40 CFR § 122.26(d)(2)(iv)(B).) These non-storm water discharges therefore are not subject to the MEP standard.

“Illicit discharges” defined in the regulations is the most closely applicable definition of “non-storm water” contained in federal law and the terms are often used interchangeably. In fact, “illicit discharge” is defined by USEPA in its 1990 rulemaking, as “any discharge through a municipal separate storm sewer that is not composed entirely of storm water and that is not covered by an NPDES permit [other than the permit for the discharge from the MS4].” (55 Fed. Reg. 47990, 47995).

Non-storm water discharges from the MS4 that are not authorized by separate NPDES permits, nor specifically exempted, are subject to requirements under the NPDES program, including discharge prohibitions, technology-based effluent limitations and water quality-based effluent limitations (40 CFR section 122.44). USEPA’s preamble to the storm water regulations also supports the interpretation that regulation of non-storm water discharges through an MS4 is not limited to the MEP standard in CWA section 402(p)(3)(B)(iii):

“Today’s rule defines the term “illicit discharge” to describe any discharge through a municipal separate storm sewer system that is not composed entirely of storm water and that is not covered by an NPDES permit. Such illicit discharges are not authorized under the Clean Water Act. Section 402(p)(3)(B) requires that permits for discharges from municipal separate storm sewers require the municipality to “effectively prohibit” non-storm water discharges from the municipal separate storm sewer...Ultimately, such non-storm water discharges through a municipal separate storm sewer must either be removed from the system or become subject to an NPDES permit.” (55 FR 47990, 47995.)

In its 1990 rulemaking, USEPA explained that the illicit discharge detection and elimination program requirement was intended to begin to implement the CWA’s provision requiring permits to “effectively prohibit non-storm water discharges.” (55 FR 47990, 47995).

Certain enumerated conditionally exempt non-storm water discharges are allowed provided they are not found to be significant source of pollution. If a Permittee or the Central Valley Water Board Executive Officer determines that any individual or class of conditionally exempt non-storm water discharge may be significant source of pollutants, the Central Valley Water Board Executive Officer may require the Permittee to monitor and submit a report and impose BMPs to control the discharge.

E. Trash Discharge Prohibition

In 2015, the State Water Resources Control Board (State Water Board) adopted Resolution 2015-0019 amending the Water Quality Control Plan for Ocean Waters of California, and Part 1 of the Water Quality Control Plans for Inland Surface Waters, Enclosed Bays, and Estuaries of California to include statewide provisions for the control of trash, which hereafter referred to as the Trash Provisions. The Trash Provisions, which became effective 2 December 2015, include provisions to control trash statewide, and a statewide prohibition on the discharge or the deposition of trash to waters of the State.

The requirements to comply with the Trash Provisions are provided in **Attachment N** of this Order. Permittees are required to demonstrate full compliance with the Trash Provisions no later than 2 December 2030 or as amended, if amended by the State Water Board, and to comply with trash reporting requirements in this Order applicable to the approach the Permittee has selected (Track 1 or Track 2).

If the Executive officer determines that a specific land use or location generates substantial amounts of trash, the Executive Officer shall establish a time schedule for full compliance at the designated land use in conjunction with that determination. The final compliance date in a time schedule for a designated land use cannot be longer than ten (10) years from the date of the determination. For New Permittees not previously covered under a Central Valley Water Board or State Water Board MS4 Permit after the effective date of the Order, full compliance must be achieved within ten (10) years of the effective date of designation.

The Trash Provisions were adopted by the State Water Board to address the water quality impacts of accumulation of trash 5 mm or larger from MS4s into waterbodies. The objective of the Trash Provisions is to provide statewide consistency for the Water Boards' regulatory approach to protect aquatic life and public health beneficial uses, and reduce environmental issues associated with trash in state waters.

While the Final Staff Report⁸⁸ to the Trash Provisions acknowledges littering by the public on or adjacent to waterbodies; illegal dumping into or adjacent to water bodies; and direct disposal (overboard disposal and/or dumping) of trash into waterbodies from vessels involved in commercial, military, fishing, or recreational activities as three of the five primary sources and transport mechanisms for trash to reach waters, the main element of the Trash Provisions is a land-use based compliance approach that focuses trash controls on areas with high trash

⁸⁸ Final Staff Report Including the Substitute Environmental Documentation, Amendment to the Water Quality Control Plan for the Ocean Waters of California to Control Trash and part 1 Trash Provisions of the Water quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries in California, April 7, 2015.

generation rates within the jurisdiction of MS4s. This compliance approach requires the use of a trash full capture system (Track 1) or achieve a full capture system equivalency (Track 2) depending on the Permittee's selected method of compliance. Appendix A of the Final Staff Report to the Trash Provisions provides the background for the need to address the water quality impacts of trash as small as 5 mm from an MS4s' priority land use, which is defined in the Trash Provisions. Because the Trash Provisions concentrate on single-use disposable trash (e.g., plastic packaging) from an MS4's priority land use, the water quality impacts of trash in waterbodies and areas near waterbodies are not specifically addressed.

In some places, waterbodies and areas near waterbodies within the Central Valley region are heavily impacted by accumulated trash, which can have a detrimental impact on water quality and impair beneficial uses including Freshwater Habitat (WARM & COLD), Spawning, Reproduction, and/or Early Development (SPWN) and Migration of Aquatic Organisms (MIGR). Trash in waterbodies and/or near waterbodies, where it may be discharged to waterbodies typically consists of tires, shopping carts, improperly disposed of oil, medical and other hazardous waste, textiles, and household items, furniture, and appliances. During a typical rainy winter, waterbodies can flood and trash accumulated near waterbodies can be swept into receiving waters often causing hydromodification of the waterway and loss of habitat for fish and other aquatic organisms. The Trash Amendments do not adequately address the water quality impacts of trash in areas in or near waterbodies. The Trash Capture Credits Program is intended to allow the Permittees to address water quality impacts in those areas as a comprehensive approach.

Trash near and in waterbodies can have a detrimental impact on water quality and impair beneficial uses including Contact Recreation & Non-Contract Recreation (REC-1 & REC-2), Freshwater Habitat (WARM & COLD), Spawning Reproduction, Early Development (SPWN) and Migration of Aquatic Organisms (MIGR), and Wildlife Habitat (WILD). Besides the negative aesthetic effects, trash can threaten the health and safety of recreators.⁸⁹ Medical waste and personal hygiene debris can spread disease, while metal and broken glass can cause injury.⁹⁰ Once trash escapes into the environment, cleaning it up is expensive, and this economic burden often falls on local governments and their residents.

During a typical rainy winter, the waterbodies can flood, and trash accumulated near the waterbodies can be swept into the receiving waters. Trash swept into the water can form an armor on the bottom of the waterbody. This armor can then form an impenetrable barrier, which causes hydromodification downstream

⁸⁹ <http://epa.gov/trash-free-waters/learn-about-aquatic-trash>.

⁹⁰ Sheavly, S.B. 2004. Marine Debris: An Overview of a Critical Issue for our Oceans. 2004 International Coastal Cleanup Conference, San Juan, Puerto Rico. The Ocean Conservancy.

of the waterbody and loss of habitat for fish and other aquatic organisms because of anoxic conditions.⁹¹ Other pollutants can also cause aquatic toxicity in receiving waters.

The Trash Capture Credits Program is intended to address water quality impacts in waterbodies and areas near waterbodies by allowing trash credits to be applied against FCSE implementation requirements. While the Trash Capture Credits Program wouldn't be considered a certified trash full capture system, the five (5) to one (1) ratio is intended to significantly remove a greater volume of trash than a trash full capture system and result in a larger reduction in water quality impacts. Permittees who elect to comply with the Trash Discharge Prohibition through Track 2 may include trash cleanup activities under the Trash Capture Credits Program as one form of institutional control to achieve compliance. **N1.D.7** of Attachment N of the Order sets out a methodology for calculating Track 2 credits associated with trash cleanup and associated reporting requirements. The Order includes the conditions a Permittee must meet to obtain trash capture credits, and monitoring and reporting requirements to comply with the Trash Provisions.

The Central Valley Water Board may reject a portion or all trash capture credits if it is determined that a trash cleanup activity does not meet the Trash Capture Program conditions.

F. Pyrethroid Pesticides Discharge Prohibition

On 8 June 2017, the Central Valley Water Board adopted Resolution R5-2017-0057, which adopted the Basin Plan Amendment (BPA) for the Control of Pyrethroid Pesticide Discharges and approved the supporting Substitute Environmental Documentation and Staff Report. The BPA established measurable pyrethroid concentration goals and a program of implementation for the control of pyrethroid pesticides that are impacting or could potentially impact aquatic life uses in surface waters in the Sacramento and San Joaquin River watersheds of the Central Valley. It also established Total Maximum Daily Loads for waterbodies that are listed as impaired by pyrethroids on the Clean Water Act 303(d) list, and established provisions to address and/or prevent future pyrethroid listings.

An Order to Submit Technical and Monitoring Reports Pursuant to California Water Code Sections 13267 and 13383 (13267/13383 Order) was issued on 1 June 2017 to MS4 Permittees enrolled under the Central Valley's Region-wide Municipal Separate Storm Sewer Systems Permit, R5-2016-0040 and select Phase II MS4 Permittees within the Central Valley region covered under the State Water Board's statewide Phase II MS4 General Order National Pollutant Discharge Elimination System (NPDES) No. CAS000004, *Waste Discharge*

⁹¹ Steelhead Creek: Condition, Clean-up and Prognosis, Roland Brady, PhD, P.G., Central Valley Regional Water Quality Control Board Presentation, December 2018.

Requirements for Storm Water Discharges from Small MS4s, State Water Board Order WQ 2013-0001-DWQ. Permittees receiving the 13267/13383 Order have completed the requirements to submit a Pyrethroid Management Plan and/or Baseline Monitoring Report. Permittees may submit their Pyrethroid Management Plan as part of the SWMP.

F5. RATIONALE FOR RECEIVING WATER LIMITATIONS

This Order conditions the discharge of pollutants from MS4s to satisfy requirements of Clean Water Act section 402(p)(3)(B). The recent U.S. Supreme Court decision *City and County of San Francisco, California v. Environmental Protection Agency* (2025) 145 S.Ct. 704 holds that NPDES permits issued by the U.S. EPA to implement Clean Water Act section 301(b)(1)(C) (33 U.S.C. § 1311(b)(1)(C)) may not include “end-result requirements,” which are provisions that do not spell out what a permittee must do or refrain from doing; rather, they make a permittee responsible for the quality of the water in the body of water into which the permittee discharges pollutants.

Under the Clean Water Act, MS4 discharges are not required to strictly comply with water quality standards pursuant to Clean Water Act section 301(b)(1)(C). (*Defenders of Wildlife v. Browner* (9th Cir. 1999) 191 F.3d 1159.) MS4 discharges must meet a technology-based standard of prohibiting non-storm water discharges and reducing pollutants in the discharge to the Maximum Extent Practicable (MEP) in all cases, but requiring strict compliance with water quality standards (e.g., by imposing numeric effluent limitations) is at the discretion of the permitting agency. (33 U.S.C. § 1342(p)(3)(B); *Defenders of Wildlife, supra*.) To the extent NPDES permitting authorities impose conditions requiring discharges to meet water quality standards, either strictly or through an iterative process, they are relying on authority in Clean Water Act section 402(p)(3)(B) to include “such other provisions as the Administrator or the State determines appropriate for the control of such pollutants.” (33 U.S.C. § 1342(p)(3)(B)(iii).) This Order is not based on Clean Water Act section 301(b)(1)(C). Nothing in the U.S. Supreme Court’s holding in *City and County of San Francisco* addressed Clean Water Act section 402(p)(3)(B), and the U.S. Supreme Court grounded its decision limiting end-result requirements in Clean Water Act section 301(b)(1)(C). (*City and County of San Francisco, supra*, at pp. 10-20.) As a result, *City and County of San Francisco* does not limit the inclusion of receiving water limitations in this MS4 NPDES order.

This Order includes receiving water limitations not only in recognition of the authority conveyed by Clean Water Act section 402(p)(3)(B) and recognized by *Defenders of Wildlife*, but alternatively as a matter of independent state law authority (33 U.S.C. § 1370). Under the Porter-Cologne Water Quality Control Act, waste discharge requirements must implement applicable water quality control plans, which include the beneficial uses to be protected for a given water body and the water quality objectives reasonably required for that protection. (Wat. Code, § 13263.) When implementing requirements under the Porter-Cologne Act that are not compelled by federal law, the Water Boards have some flexibility to consider other factors, such as economics, when establishing the appropriate requirements. (Wat. Code, §§ 13241,

13263; *City of Burbank v. State Water Resources Control Bd.* (2005) 35 Cal.4th 613.) Accordingly, since the Water Boards have discretion under federal law to determine whether to require MS4 discharges to strictly comply with water quality standards identified in applicable water quality control plans and federal water quality criteria, the Water Boards may also utilize the flexibility under the Porter-Cologne Act to decline to require MS4 discharges to strictly comply with water quality standards. (See also, State Water Board Order WQ 2015-0075 (*Los Angeles MS4*), p. 14, n. 51.)

Multiple State Water Board precedential decisions guide and control the Water Boards in requiring MS4 NPDES permits to include receiving water limitations based on state water quality standards identified in applicable water quality control plan and applicable federal water quality criteria and to implement such limitations through an iterative process, and over time through appropriate watershed management plans. (State Water Board Orders WQ 98-01 (*Environmental Health Coalition*), WQ 99-05 (*Environmental Health Coalition*), WQ 2001-15 (*Building Industry Association of San Diego*), WQ 2015-0075.) That iterative process involves reporting of the exceedance of an applicable water quality standard, submission of a report describing proposed improvements to BMPs expected to better meet water quality standards and an implementation schedule, and implementation of these new or improved BMPs in accordance with the approved schedule. (State Water Board Order WQ 99-05, pp. 2-3; see also State Water Board Order WQ 2001-15, pp. 7-9.) The State Water Board previously found it appropriate to require implementation of BMPs in lieu of numeric water quality-based effluent limitations to meet water quality standards. (See State Water Board Orders WQ 91-03 (*Citizens for a Better Environment*), WQ 91-04 (*Natural Resources Defense Council*), WQ 98-01, WQ 2001-15.) In 2015, the State Water Board supplemented its prior precedent and included further direction to allow appropriate watershed management plans to provide an additional pathway for compliance with water quality standards. (WQ 2015-0075, pp. 15-17.) The State Water Board's precedential decisions direct the Water Boards to require compliance with water quality standards through incorporation of receiving water limitations provisions consistent with State Water Board Order WQ 99-05.

Because *City and County of San Francisco* did not construe Clean Water Act section 402(p)(3)(B) or apply to MS4 NPDES permits, but also in recognition that states may include such other provisions as determined appropriate for the control of pollution from MS4s (33 U.S.C. § 1342(p)(3)(B)(iii)) and include more stringent requirements than the federal Clean Water Act (33 U.S.C. § 1370) and that multiple State Water Board precedential orders require inclusion of receiving water limitations and provisions incorporating an iterative approach to implementing water quality standards, this Order retains receiving water limitations consistent with State Water Board Order WQ 2015-0075 and prior precedent.

The Clean Water Act generally requires NPDES permits to include technology-based effluent limitations and any more stringent limitations necessary to meet water quality standards. Additionally, under the Porter-Cologne Act, waste discharge

requirements must implement applicable water quality control plans, which include water quality standards developed by the State and Regional Water Boards.⁹² In the special context of NPDES permits for MS4s, however, the Clean Water Act does not explicitly reference the requirement to meet technology-based limits or water quality standards. MS4 discharges must effectively prohibit non-storm water discharges and reduce pollutants in the discharge to the Maximum Extent Practicable (MEP) in all cases, but requiring strict compliance with water quality standards (e.g., by imposing numeric effluent limitations) is at the discretion of the permitting agency. Specifically, the Clean Water Act states as follows:

“Permits for discharges from municipal storm sewers –

[...]

- (ii) shall include a requirement to effectively prohibit non-storm water discharges into the storm sewers; and
- (iii) shall require controls to reduce the discharge of pollutants to the maximum extent practicable, including management practices, control techniques and system, design and engineering methods, and such other provisions as...the State determines appropriate for the control of such pollutants.⁹³“

Thus, a permitting agency imposes requirements related to attainment of water quality standards where it determines that those provisions are “appropriate for the control of [relevant] pollutants” pursuant to the Clean Water Act municipal storm water provisions.⁹⁴

The State Water Board has previously exercised this discretion under federal law in favor of requiring compliance with water quality standards but has required less than strict or immediate compliance. In precedential orders, the State Water Board has directed that MS4 permits require discharges to be controlled so as not to cause or contribute to exceedances of water quality standards in receiving waters,⁹⁵ but has prescribed an iterative process whereby an exceedance of a water quality standard

⁹² CWC section 13263. The term “water quality standards” encompasses the beneficial uses of the water body and the water quality objectives (or “water quality criteria” under federal terminology) that must be met in the waters of the United States to protect beneficial uses. States also must implement water quality standards in accordance with the federal and state anti-degradation policies.

⁹³ 33 USC section 1342(p)(3)(B).

⁹⁴ See *Defenders of Wildlife v. Browner*, 191 F.3d 1159, 1166 (9th Cir. 1999).

⁹⁵ State Water Board Orders WQ 98-01 (Environmental Health Coalition), WQ 99-05 (Environmental Health Coalition), WQ 2001-15 (Building Industry Association of San Diego).

triggers a process of BMP improvements.⁹⁶ However, mere engagement in the iterative process does not provide a Permittee with a “safe harbor” from enforcement of receiving water limitations. Rather, as discussed further below, avoiding a violation of this Order’s receiving water limitations requires the Permittee to develop and meet concrete and measurable interim milestones toward final compliance with water quality standards, including meeting all deadlines for achievement of such interim milestones.

The State and Regional Water Boards’ authority under federal law to require compliance with water quality standards in MS4 permits has been judicially upheld on several occasions. The receiving water limitations provisions of the 2001 Los Angeles MS4 Order specifically have been litigated twice, and in both cases, the courts upheld the provisions and the Los Angeles Water Board’s interpretation of the provisions. In a decision resolving a challenge to the 2001 Los Angeles MS4 Order, the Los Angeles County Superior Court stated: “[T]he Regional [Water] Board acted within its authority when it included [water quality standards compliance] in the Permit without a ‘safe harbor,’ whether or not compliance therewith requires efforts that exceed the ‘MEP’ standard.”⁹⁷ The lack of a safe harbor in the iterative process of the 2001 Los Angeles MS4 Order was again acknowledged in 2011 and 2013, this time by the United States Court of Appeal for the Ninth Circuit. In these instances, the Ninth Circuit was considering a citizen suit brought by the Natural Resources Defense Council against the County of Los Angeles and the Los Angeles County Flood Control District for alleged violations of the receiving water limitations of that order. The Ninth Circuit held that, as the receiving water limitations of the 2001 Los Angeles MS4 Order (and accordingly as the precedential language in State Water Board Order WQ 99-05) was drafted, engagement in the iterative process does not excuse liability for violations of water quality standards.⁹⁸ The California Court of Appeal has come to the same conclusion in interpreting similar receiving water limitations provisions in MS4 Orders issued by the San Diego

⁹⁶ State Water Board Order WQ 99-05, pp. 2-3; see also State Water Board Order WQ 2001-15, pp. 7-9.

⁹⁷ *In re Los Angeles County Municipal Storm Water Permit Litigation* (L.A. Super. Ct., No. BS 080548, Mar. 24, 2005) Statement of Decision from Phase I Trial on Petitions for Writ of Mandate, pp. 4-5, 7. The decision was affirmed on appeal (*County of Los Angeles v. State Water Resources Control Board* (2006) 143 Cal.App.4th 985); however, this particular issue was not discussed in the court of appeal’s decision.

⁹⁸ *Natural Resources Defense Council v. County of Los Angeles* (9th Cir. 2011) 673 F.3d. 880, rev’d on other grounds sub nom. *Los Angeles County Flood Control Dist. v. Natural Resources Defense Council* (2013) 133 S.Ct. 710, mod. by *Natural Resources Defense Council v. County of Los Angeles* (9th Cir. 2013) 725 F.3d 1194, cert. den. *Los Angeles County Flood Control Dist. v. Natural Resources Defense Council* (2014) 134 S.Ct. 2135.

Regional Water Quality Control Board in 2001 and the Santa Ana Regional Water Quality Control Board in 2002.⁹⁹

Consistent with the foregoing precedent, receiving water limitations are included in this Order to ensure that individual and collective discharges from the MS4 do not cause or contribute to exceedances of water quality standards, including in instances where the Permittee is already complying with the MEP standard. The receiving water limitations in this Order provide that discharges from a Permittee's MS4 may not cause or contribute to exceedances of applicable water quality standards in receiving waters. Such water quality standards consist of (1) beneficial uses, water quality objectives, and plans for their implementation in the applicable Basin Plan; (2) water quality control plans or policies adopted by the State Water Resources Control Board; and (3) federal regulations, including but not limited to, 40 CFR sections 131.12 and 131.38.

This Order offers what the State Water Board has termed an "alternative approach to compliance" with receiving water limitations. Permittees may comply with receiving water limitations "through timely implementation of control measures and other actions to reduce pollutants in the discharges in accordance with the storm water management program and its components and other requirements of this Order including any modifications." A Permittee's storm water management program establishes water quality requirements and BMPs; interim milestones toward compliance with receiving water limitations, including dates for their achievement; and final compliance deadlines for meeting receiving water limitations. Milestones and deadlines must be clear, concrete and finite, based on measurable criteria or indicators, in order to provide the rigor and accountability necessary to justify the alternative approach to compliance with receiving water limitations through the iterative process. A Permittee that complies with all BMPs and interim and final deadlines in a Board-approved storm water management plan (SWMP) is deemed in compliance with the receiving water limitations of this Order, notwithstanding continued exceedances of water quality standards in receiving waters that may persist prior to the final date of attainment provided in the Permittee's SWMP.

This Order's alternative approach to compliance with receiving water limitations also contains an adaptive management procedure specifying a process by which Permittees must refine their storm water management plans based on updated information. When timely implementation of BMPs in a Permittee's storm water management plan does not achieve interim water quality milestones as expected, this Order imposes procedures designed to re-evaluate the program and modify it in a manner that ultimately will result in timely compliance with water quality standards. For the sake of clarity, this Order's specific procedures for adaptive management should be distinguished from the general concept of an "iterative process," which

⁹⁹ Building Industry Assn. of San Diego County v. State Water Resources Control Bd. (2004) 124 Cal.App.4th 866; City of Rancho Cucamonga v. Regional Water Quality Control Bd. (2006) 135 Cal.App.4th 1377.

historically has been used to refer to an open-ended process of continually improving BMPs through trial and error.

In accordance with the judicial precedent discussed above, mere engagement in an iterative process of BMP improvements does not provide a safe harbor from enforcement of this Order's receiving water limitations. This Order's adaptive management process places specific and concrete requirements on Permittees that, if not complied with, open Permittees up to immediate enforcement for failure to meet applicable water quality standards in receiving waters. The State Water Board has stated that direct enforcement of water quality standards is necessary to protect water quality, at a minimum as a backstop where dischargers fail to meet requirements of the Order that are designed to ensure progress toward meeting the standards.

This Order includes requirements to implement WLAs assigned to MS4 discharges in TMDLs. Those TMDLs adopted through the State's basin planning process include programs of implementation pursuant to Water Code section 13242, including implementation schedules for attaining water quality standards. The TMDL provisions and attachments include compliance schedules for TMDLs adopted by the Central Valley Water Board consistent with the TMDL implementation schedule to achieve the final receiving water limitations. The Central Valley Water Board recognizes that, in the case of impaired waters subject to a TMDL, the permit's receiving water limitations for the pollutants addressed by the TMDL may be exceeded during the period of TMDL implementation. Therefore, this Order provides that a Permittee's full compliance with the applicable TMDL requirements pursuant to the compliance schedules in this Order constitutes a Permittee's compliance with the receiving water limitations provisions of this Order for the particular pollutant addressed by the TMDL.

This Order includes requirements to implement Part 1 (Trash Provisions) and Part 3 (Bacteria Provisions and Water Quality Variance Policy) of the Water Quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries of California adopted by the State Water Resources Control Board.

The receiving water limitations incorporate the Basin Plans water quality objectives.

This Order requires the Permittee to develop a Storm Water Management Program that will ensure timely progress toward a condition in which the Permittee's discharges are no longer causing or contributing to exceedances of water quality standards in receiving waters. Once the Permittee has identified prioritized water quality constituents (PWQCs), the Permittee must prepare and submit a Reasonable Assurance Analysis (RAA) demonstrating that the water quality control measures the Permittee has selected are reasonably certain to achieve anticipated pollutant reductions. The objective of the RAA is to demonstrate the ability of the water quality controls selected for a Permittee's Storm Water Management Program to ensure that the Permittee's MS4 discharges will achieve applicable water quality based

effluent limitations and do not cause or contribute to exceedances and/or excursions of water quality standards.

The Permittee may address multiple PWQCs in a single RAA, but each PWQC must be addressed by at least one RAA.

This Order's requirements with respect to the RAA are informed by the State Water Board's recent order concerning the Los Angeles Regional Water Board's MS4 Permit (State Water Board Order No. WQ 2015-0075, as amended by Order WQ 2021-0052-EXEC, and Order WQ 2020-0038). In order to provide analytical rigor and accountability within the alternative compliance pathway, the RAA must be, at a minimum, a quantitative evaluation that relies on (1) best management practices performance data, and (2) reasonable assumptions that are clearly stated. The RAA must be supported, at least in part, by models that are in the public domain or by comparable methodologies with wide acceptance, such as trend analyses. Models to be considered for the RAA include but are not limited to: land/watershed model (e.g., Hydrologic Simulation Program-FORTRAN (HSPF) model), BMP performance models (e.g., Storm Water Management Model (SWMM) BMP model), or integrated BMP model (e.g., USEPA System for Urban Stormwater Treatment and Analysis Integrational (SUSTAIN) model). To the extent that multiple Permittees propose to address the same PWQC(s) with the same/substantially similar strategies and activities, those Permittees may pool their resources to jointly conduct and rely on an RAA. In addition, the RAA may evaluate multiple constituents and ultimately identify the limiting pollutant that drives the implementation strategies and activities.

The RAA commences with assembly of the available, relevant data collected, including land use and pollutant loading data, establishment of quality assurance/quality control (QA/QC) criteria, QA/QC checks of the data, and identification of the data set meeting the criteria for use in the analysis. These data shall be statistically analyzed to determine the best estimate of performance and the confidence limits on that estimate for the pollutants to be evaluated. Based on estimated baseline conditions and pollutant loadings, required pollutant reductions are estimated, and best management practices and an implementation schedule will be generated. The RAA shall be submitted with the SWMP in accordance with **Part V.G.2** of the Order.

A Permittee's full compliance with all requirements and dates for their achievement in an approved Storm Water Management Program constitutes compliance with the storm water discharge prohibitions in **Part II.A** and the receiving water limitations of **Part IV** of this Order for the specific water body-pollutant combinations addressed by an approved SWMP. However, if a Permittee fails to meet any interim or final requirement or date for its achievement beginning with notification of a Permittee's intent to develop a Storm Water Management Program and continuing with implementation of an approved Storm Water Management Program, the Permittee is subject to strict enforcement of receiving water limitations for the water body-pollutant combination(s) that were to be addressed by the requirement.

F6.RATIONALE FOR EFFLUENT LIMITATIONS

A. Technology-Based Effluent Limitations (TBELs)

Section 301(b)(1)(A) of the CWA and 40 CFR section 122.44(a) require that NPDES permits include technology based effluent limitations.¹⁰⁰ In 1987, the CWA was amended to require that municipal storm water discharges “reduce the discharge of pollutants to the maximum extent practicable.” (CWA § 402(p)(3)(B)(iii).) The “maximum extent practicable” standard is the applicable federal technology based standard that MS4 owners and operators must attain to comply with their NPDES permits.¹⁰¹ The corresponding regulatory provisions that further detail the MEP standard can be found in 40 CFR sections 122.26(d)(2)(iv) and 122.44(k)(2).

Neither Congress nor the USEPA has specifically defined the term “maximum extent practicable.” Rather, the MEP standard is a flexible and evolving standard. Congress established this flexible MEP standard so that administrative bodies would have “the tools to meet the fundamental goals of the CWA in the context of storm water pollution.”¹⁰² This standard was designed to allow permit writers flexibility to tailor permits to the site-specific nature of MS4s and to use a combination of pollution controls that may be different in different permits.¹⁰³ The MEP standard is also expected to evolve in light of programmatic improvements, new source control initiatives, and technological advances that serve to improve the overall effectiveness of storm water management programs in reducing pollutant loading to receiving waters. This is consistent with USEPA’s interpretation of storm water management programs. As explained by USEPA in its 1990 rulemaking, “EPA anticipates that storm water management programs will evolve and mature over time” (55 FR 47990, 48052 (16 November 1990)). There is ample evidence of this evolution in storm water management.

This Order includes programmatic requirements in six areas pursuant to 40 CFR section 122.26(d)(2)(iv) as well as numeric design standards for storm water runoff from new development and redevelopment consistent with the federal

¹⁰⁰ A technology based effluent limitation is based on the capability of a model treatment method to reduce a pollutant to a certain concentration (NPDES Permit Writer’s Manual, Appendix A). Technology based requirements represent the minimum level of control that must be imposed in a permit issued under CWA section 402.

¹⁰¹ Note that the MEP standard only applies to storm water discharges from the MS4. Non-storm water discharges are subject to a different standard – specifically, non-storm water discharges into the MS4 must be effectively prohibited. 33 U.S.C. section 1342(p)(B)(ii)

¹⁰² Building Industry Ass’n of San Diego County v. State Water Resources Control Board (2004) 124 Cal.App.4th 866, 884.

¹⁰³ In re City of Irving, Texas, Municipal Storm Sewer System, (July 16, 2001), 10 E.A.D. 111 (EPA), *6.

MEP standard (see State Water Board Order WQ 2000-11). This Order also includes protocols for periodically evaluating and modifying or adding control measures, consistent with the concept that MEP is an evolving and flexible standard. A Permittee's implementation of a Storm Water Management Program in a manner fully consistent with the framework described in **Part V.F** satisfies the requirement in **Part III.A** to control pollutants in storm water discharges to the maximum extent practicable.

B. Water Quality Based Effluent Limitations (WQBELs) and Compliance Schedules

In addition to requiring that MS4 permits include technology-based requirements consistent with the MEP standard, section 402(p)(3)(B)(iii) of the CWA authorizes the inclusion of "such other provisions as the Administrator or the State determines appropriate for the control of [] pollutants." This requirement gives the permitting authority discretion to determine what permit conditions are necessary to control pollutants. Generally, permit requirements designed to achieve water quality standards are referred to as water quality based effluent limitations (WQBELs). A WQBEL is a restriction on the quantity or concentration of a pollutant that may be discharged from a point source into a receiving water that is necessary to achieve an applicable water quality standard in the receiving water.¹⁰⁴ WQBELs may be expressed narratively or numerically.

In its Phase I Stormwater Regulations, Final Rule, USEPA elaborated on these requirements, stating that, "permits for discharges from MS4s must require controls to reduce the discharge of pollutants to the MEP, and where necessary water quality-based controls" (see 55 FR.47990, 47994 (16 November 1990)). In December 1999, USEPA reiterated in its Phase II Stormwater Regulations, Final Rule that MS4 "permit conditions must provide for attainment of applicable water quality standards (including designated uses), allocations of pollutant loads established by a TMDL, and timing requirements for implementation of a TMDL."¹⁰⁵ The State Water Board has affirmed that MS4 permits must include requirements necessary to achieve compliance with the applicable technology-based standard of MEP and to achieve water quality standards.¹⁰⁶

WQBELs are required for point source discharges that have the reasonable potential to cause or contribute to an excursion of water quality standards and

¹⁰⁴ See 40 CFR section 122.2; NPDES Permit Writer's Manual, Appendix A. A WQBEL is distinguished from a technology based effluent limitation in that the basis for the WQBEL is the applicable water quality standard for the receiving water, while the basis for a technology based effluent limitation is generally the performance of the best available technology.

¹⁰⁵ See, e.g., Phase II Stormwater Regulations, Final Rule, 64 FR 68722, 68737.

¹⁰⁶ See, e.g., State Water Board Orders WQ 99-05, 2001-15, and 2015-75.

technology based effluent limitations or standards are not sufficient to achieve water quality standards.¹⁰⁷

The State Water Board has previously concluded that sole reliance in MS4 permits on BMP based requirements is not sufficient to ensure attainment of water quality standards.¹⁰⁸ The Central Valley Water Board concurs with this conclusion, which is amply supported by Central Valley Water Board established TMDLs for impaired waters in the Central Valley region, indicating that MS4 discharges are a continuing source of pollutants to the impaired receiving waters notwithstanding the implementation of storm water management programs that have been driven by the MEP standard by Permittees for the last two decades.

In this Order, WQBELs are included where the Central Valley Water Board has determined that discharges from the MS4 have the reasonable potential to cause or contribute to an excursion above water quality standards.¹⁰⁹ Reasonable potential can be demonstrated in several ways, one of which is through the TMDL development process. Where a point source is assigned a WLA in a TMDL, the analysis conducted in the development of the TMDL may provide the basis for the Central Valley Water Board's determination that the discharge has the reasonable potential to cause or contribute to an exceedance of water quality standards in the receiving water. This approach is affirmed in USEPA's Permit Writer's Manual, which states, "[w]here there is a pollutant with a WLA from a TMDL, a permit writer must develop WQBELs." Therefore, WQBELs are included in this Order for all pollutants for which a WLA is assigned to MS4 discharges.¹¹⁰ The 2014 U.S. EPA Memo, while not binding authority, states "[w]here the TMDL includes WLAs for stormwater sources that provide numeric pollutant loads, the WLA should, where feasible, be translated into effective, measurable WQBELs that will achieve this objective. This could take the form of a numeric limit, or of a measurable, objective BMP-based limit that is projected to achieve the WLA." The 2014 U.S. EPA Memo further acknowledges that the permitting authority should consider the schedules in the TMDL as it decides whether and how to establish enforceable interim requirement and interim dates into the permit.

Federal regulations further require that, "when developing water quality-based effluent limits...the permitting authority shall ensure that effluent limits ... are

¹⁰⁷ 40 CFR sections 122.44(d)(1)(i); 122.44(d)(1)(iii)

¹⁰⁸ See State Water Board Order WQ 2015-0075, p. 14.

¹⁰⁹ 40 CFR sections 122.44(d)(1)(i)-(iii); 122.44(d)(1)(vii)(B)

¹¹⁰ See U.S. EPA, "Revision to the November 22, 2002, Memorandum 'Establishing Total Maximum Daily Load (TMDL) Wasteload Allocations (WLAs) for Storm Water Sources and NPDES Permit Requirements Based on Those WLAs'" (November 26, 2014) (hereinafter "2014 U.S. EPA Memo.")

consistent with the assumptions and requirements of any available waste load allocation for the discharge...” (40 CFR § 122.44(d)(1)(vii)(B)).

The Central Valley Water Board interprets this to mean that the WQBEL must be expressed consistent with the underlying WLA. Additionally, WQBELs must be designed such that a Permittee’s compliance with the WQBELs should result in attainment of the WLA by the final compliance date. In **Attachment G** of this Order, the Central Valley Water Board has devised permit requirements that meet these mandates: for each TMDL, the requirements in **Attachment G** have been specifically designed to attain compliance with applicable WLAs by the final compliance deadline. Where the applicable TMDL implementation plan includes a final compliance date beyond the permit term, monitoring and other requirements are being included in this Order to monitor progress towards achieving future compliance.

According to the Basin Plans, the Central Valley Water Board will, as necessary, include schedules of compliance in NPDES permits for compliance with water quality-based effluent limits based on the waste load allocations. The compliance schedules must be consistent with the requirements of federal laws and regulations, including, USEPA regulations 40 CFR 122.47, State laws and regulations.

1. **Supplemental Information Regarding Specific TMDLs**

Lower San Joaquin River, Stockton Deep Water Ship Channel (SDWSC) TMDL (Organic Enrichment, Low Dissolved Oxygen)

The San Joaquin River (SJR) Dissolved Oxygen Control Program defines oxygen demanding substances and their precursors as any substance or substances that consume, have the potential to consume, or contribute to the growth or formation of substances that consume or have the potential to consume oxygen from the water column.

The Basin Plan Amendment establishing this TMDL set the initial waste load allocations for NPDES-permitted discharges of oxygen demanding substances and their precursors as the effluent limitations that were applicable on 28 January 2005. Waste load allocations and permit conditions for new or expanded point source discharges in the SJR Basin upstream of the SDWSC, including NPDES and stormwater, are based on the discharger demonstrating that the discharge will have no reasonable potential to cause or contribute to a negative impact on the dissolved oxygen impairment in the SDWSC.

On 28 January 2005, the 2002 Phase I MS4 permit for the Stockton Urbanized Area (Section 33) stated the following for effluent limits: “... the effluent limitations in this Order are narrative and include the requirement to reduce pollutants in storm water discharges to the MEP. In lieu of numeric effluent limitations, this Order requires the implementation of BMPs identified

in the Permittees' SWMP to control and abate the discharge of pollutants in storm water discharges. Implementation of BMPs and compliance with performance standards in accordance with the Permittees' SWMP and its schedules constitutes compliance with the MEP standard". This permit applies these limitations to discharges from the Stockton Urbanized Area MS4 maintained by the City of Stockton and County of San Joaquin upon Central Valley Water Board issuance of NOAs.

On 28 January 2005, the 2004 Phase I MS4 permit for the Port of Stockton (Section 30) stated the following for effluent limitations: "...the effluent limitations in this Order are narrative and include the requirement to reduce pollutants in storm sewer discharges to the MEP. This Order requires the implementation of BMPs, and performance standards identified in the Port's SWMP to control and abate the discharge of pollutants in storm water discharges. Implementation of BMPs and compliance with performance standards in accordance with the Port's SWMP and its schedules constitutes compliance with the MEP standard". This permit applies these limitations to discharges from the Port of Stockton upon Central Valley Water Board issuance of an NOA.

On 28 January 2005, the 2003 Phase II MS4 permit stated the following for effluent limitations in section A. Application Requirements C.1. Effluent Limitations: "Permittees must implement BMPs that reduce pollutants in storm water to the technology-based standard of MEP." This permit applies these limitations to discharges from Phase II MS4s maintained by the municipalities identified in the column to the left to which the Central Valley Water Board has issued NOAs.

For both Phase I and Phase II Permittees: In measuring compliance with permit requirements related to attainment of these waste load allocations, credit will be given for control measures implemented after 12 July 2004.

The Stockton Urbanized Area MS4 Permittees submitted to the Central Valley Water Board the Low Dissolved Oxygen Plan pursuant to the previously adopted NPDES area-wide MS4 permit, Order No. R5-2002-0181 (NPDES No. CAS083470), on 1 April 2004; a revised Dissolved Oxygen Plan on 1 October 2004 and 15 April 2009; and the Low Dissolved Oxygen Plan Final Report pursuant to Order No. R5-2007-0173 on 29 January 2013. The goal of the Low Dissolved Oxygen Plan is to protect water quality by identifying, monitoring, and mitigating the controllable sources of oxygen demanding substances and their precursors to the MEP. The Dissolved Oxygen Plan meets the requirements of Order No. R5-2002-0181 and the requirements of the Water Code Section 13267 Order issued on 14 November 2007, which were designed to implement the requirements of the San Joaquin River Dissolved Oxygen Control Program. Monitoring and implementation activities under this Plan, including any amendments or updates made in accordance with the requirements of Order No. R5-2015-0024 and the 2007 Section

13267 Order, and as prescribed in the associated Storm Water Management Plan and Reports, are ongoing and shall continue.

Previously adopted NPDES permits required the Port of Stockton MS4 to incorporate a Low Dissolved Oxygen Program in its SWMP and implement the Program if the Port's urban discharges were causing or contributing to an exceedance of water quality standards and/or the TMDL allocation for dissolved oxygen. The Port of Stockton implemented the Low Dissolved Oxygen Program throughout its prior permit term (2011-2015). As described in the Port of Stockton Municipal Storm Water Program Report of Waste Discharge and Annual Report submitted to the Central Valley Water Board on 5 August 2015, data collected in accordance with the Low Dissolved Oxygen Program indicate that the low dissolved oxygen impairment in the SDWSC is unaffected by the Port's urban discharges because levels of oxygen demanding substances in the Port's urban runoff are negligible to non-existent. In addition, the Port of Stockton continues to monitor dissolved oxygen in the SDWSC, provide operations and maintenance services for multiple aeration devices in the SDWSC, and participate in the aerator operations and maintenance agreement that is maintained among the stakeholders of the San Joaquin River Dissolved Oxygen Control Program. The Port of Stockton conducts these activities to mitigate the impacts on dissolved oxygen in the SDWSC caused by increased channel geometry resulting from dredging. Based on these factors, this Order does not require the Port of Stockton to continue to implement the Low Dissolved Oxygen Program as part of the Port's SWMP, except for those elements consistent with the provisions described earlier in this section. The Port of Stockton is in compliance with its WLA and may cease monitoring MS4 monitoring for the Low Dissolved Oxygen TMDL (Attachment G, Section G6.B.1). As stated in Order R5-2016-0040, the Port of Stockton is listed as a "Municipality" for this TMDL, but its municipal storm water discharges' contribution to oxygen demanding substances has been shown to be de minimis. It participates in the aerator operation and maintenance agreement on a voluntary basis. Descriptions of Port of Stockton activities that implement this TMDL therefore should not be construed as WQBELs or other permit requirements. The Port of Stockton is therefore deemed in compliance with the final WLAs.

TMDL for Pyrethroid Pesticides in Sacramento and San Joaquin River Basin

On 8 June 2017, the Central Valley Water Board adopted Resolution R5-2017-0057, establishing the Total Maximum Daily Load (TMDL) for waterbodies that are listed as impaired by pyrethroids on the Clean Water Action Section 303(d) list, and established provisions to address and/or prevent future pyrethroid listings. This Order includes requirements for designated Permittees to implement the TMDL in **Attachment G**.

2. Compliance Schedules for Achieving TMDL Requirements

A Regional Water Board may include a compliance schedule in an NPDES permit when the state's water quality standards or regulations include a provision that authorizes such schedules in NPDES permits.¹¹¹ In California, TMDL implementation plans¹¹² are typically adopted through Basin Plan Amendments. The TMDL implementation plan, which is part of the Basin Plan Amendment, becomes a regulation upon approval by the State of California Office of Administrative Law (OAL).¹¹³ Pursuant to California Water Code sections 13240 and 13242, TMDL implementation plans adopted by the Central Valley Water Board "shall include ... a time schedule for the actions to be taken [for achieving water quality objectives]," which allows for compliance schedules in future permits. This Basin Plan Amendment becomes the applicable regulation that authorizes an MS4 permit to include a compliance schedule to achieve WQBELs derived from WLAs.

Where a TMDL implementation schedule has been established through a Basin Plan Amendment, it is incorporated into this Order as a compliance schedule to achieve interim and final WQBELs and corresponding receiving water limitations, in accordance with 40 CFR section 122.47. WQBELs that implement TMDLs must be consistent with the assumptions and requirements of any applicable WLA, which includes applicable implementation schedules.¹¹⁴ Further, California Water Code sections 13263 and 13377 state that waste discharge requirements must implement the Basin Plan.¹¹⁵

¹¹¹ See *In re Star-Kist Caribe, Inc.*, 3 E.A.D. 172, 175 (Apr. 16, 1990), modification denied, 4 E.A.D. 33, 34 (EAB 1992).

¹¹² TMDL implementation plans consist of those measures, along with a schedule for their implementation, that the Water Boards determine are necessary to correct an impairment. The NPDES implementation measures are thus required by sections 303(d) and 402(p)(3)(B)(iii) of the CWA. State law also requires the Water Boards to implement basin plan requirements. (See Wat. Code §§ 13263, 13377; *State Water Resources Control Board Cases* (2006) 136 Cal.App.4th 189.)

¹¹³ See Gov. Code, § 11353, subd. (b). Every amendment to a Basin Plan, such as a TMDL and its implementation plan, requires approval by the State Water Board and OAL. When the TMDL and implementation plan is approved by OAL, it becomes a state regulation.

¹¹⁴ See 40 C.F.R. § 122.44(d)(1)(vii)(B).

¹¹⁵ Cal. Wat. Code, § 13263, subd. (a) ("requirements shall implement any relevant water quality control plans that have been adopted"); *id.* § 13377 ("the state board or the regional boards shall ... issue waste discharge requirements and dredged or fill material permits which apply and ensure compliance with all applicable provisions of the [CWA], thereto, together with any more stringent effluent standards or limitations necessary to implement waste quality control plans, or for the protection of beneficial uses, or to

Therefore, compliance schedules for attaining WQBELs derived from WLAs must be based on a state-adopted TMDL implementation plan.

Two TMDLs addressed by this Order have a final compliance date beyond the term of this Order: the Delta TMDL for addressing methylmercury and the Sacramento and San Joaquin River Basin TMDL for addressing pyrethroid pesticide impairments. In determining the compliance schedule associated with this TMDL, the Central Valley Water Board considered numerous factors to ensure that the schedule would be as short as possible. Factors examined include, but are not limited to, the size and complexity of the watershed; the pollutants being addressed; the number of responsible agencies involved; time for Permittees to negotiate agreements; development of water quality management plans; identification of funding sources; determination of an implementation strategy based on the recommendations of water quality management plans and/or special studies; and time for the implementation strategies to yield measurable results. Compliance schedules may be altered based on the monitoring and reporting results as set forth in the individual TMDLs. In many ways, the incorporation of interim and final WQBELs and associated compliance schedules is consistent with the adaptive management process of implementing BMPs that has been employed in the previous Central Valley Water Board MS4 Permits in that progress toward compliance with the final effluent limitations may occur over the course of many years. However, because the water bodies in the Central Valley are impaired due to MS4 discharges, it is necessary to establish more specific provisions in order to: (i) ensure measurable reductions in pollutant discharges from the MS4, resulting in progressive water quality improvements during the iterative process, and (ii) establish a final date for completing implementation of BMPs and, ultimately, attaining WLAs and water quality standards. The compliance schedule in this Order associated with the Delta methylmercury TMDL is consistent with the implementation plan established in that individual TMDL.

3. TMDLs with Past Final Compliance Deadlines

In accordance with federal regulations, this Order includes WQBELs necessary to achieve applicable waste load allocations assigned to MS4 discharges. The WLAs addressed by this Order all are expressed such that it is possible to verify an individual permittee's attainment with the WLA. In some cases, the deadline specified in the TMDL implementation plan for achieving the final waste load allocation has passed. This Order requires that Permittees meet applicable WLAs and/or receiving water limitations for which final compliance deadlines have passed.

prevent nuisance"); see also, *State Water Resources Control Board Cases* (2006) 136 Cal.App.4th 189.

For each Permittee, this Order continues to implement the TMDLs addressed by **Attachment G** as WQBELs. Because final compliance deadlines for some of these TMDLs have passed, and the WQBELs in **Attachment G** require the Permittees subject to them to meet WLAs by the final compliance deadline, the WQBELs implementing those TMDLs result in numeric limitations that are more stringent than the requirements in Permittees' previous MS4 permits. The Central Valley Water Board has legal authority to adopt a time schedule order for a Permittee that satisfies the application requirements listed in **Part III.B.4**.

If the Permittee believes it requires additional time beyond a TMDL's final compliance date to meet the applicable WLA, the Permittee may request a time schedule order pursuant to California Water Code section 13300 for the Central Valley Water Board's consideration.

F7. RATIONALE FOR PROVISIONS

A. Implementation of Storm Water Management Framework

Part V includes the requirements for the Storm Water Management Programs to be implemented by each of the Permittees. Compliance with the requirements for the Storm Water Management Programs will allow the Permittees to demonstrate that they are implementing programs to effectively prohibit non-storm water discharges to the MS4 and reduce pollutants in storm water discharges from the MS4 to the MEP. The Storm Water Management Plan prepared by each Permittee will also provide the details for implementing the water quality improvement strategies identified in the Storm Water Management Plan specifically within its Jurisdictional Runoff Area.

This Order includes requirements to incorporate a storm water management framework in the Permittee's Storm Water Management Program as described in its SWMP. The overall process for the storm water management framework is illustrated in **Attachment A** (*Storm Water Management Framework for Order R5-2026-0XXX*). The process consists of six overarching steps: assessment, prioritization, development, implementation, effectiveness assessment and reporting, and adaptive management and modification. The Permittee shall address all steps in this process. The Permittee may start at any step in the process so long as the proceeding step(s) have been completed consistent with this Order. A Permittee that complies pursuant to the Pollutant Prioritization approach shall address all steps in this process. A Permittee that complies pursuant to the Prescriptive approach shall address all steps in this process except prioritization. Each Permittee must comply with the monitoring requirements defined under the Pollutant Prioritization approach described in **Attachment J** or the Prescriptive approach described in **Attachment K**.

Implementation of the Storm Water Management Program requirements under **Part V** is how the Permittee will implement *controls to reduce the discharge of*

pollutants to the MEP” consistent with the federal regulations under 40 CFR 122.26. As required pursuant to 40 CFR 122.26(d)(2)(iv), components of the Storm Water Management Program include the “*comprehensive planning process*” applied across the Jurisdictional Runoff Area and “*intergovernmental coordination*” between the Permittee and other MS4 permit holders necessary to achieve the goals of each Permittee’s Storm Water Management Plan.

The Storm Water Management Program requirements are included to provide each Permittee criteria that can be used to demonstrate that its Storm Water Management Program is implementing the “*comprehensive planning process*” within its Jurisdictional Runoff Area to “*effectively prohibit non-stormwater discharges into the storm sewers*”, and to identify and implement the most effective “*controls to reduce the discharge of pollutants to the MEP*” in accordance with the performance standards given in the CWA.

The purpose for each step is described hereon and in **Part V** of this Order. The criteria, methodology and results must be described in the Permittee’s SWMP.

1. Assessment

The first step in the storm water management framework is described under **Part V.F.1** which outlines a process to evaluate receiving water and MS4 discharge monitoring data in order to develop a list of water quality constituents (WQCs). The Permittee must perform an assessment of receiving water conditions and MS4 discharges to develop a list of WQCs that may be adversely impacting water quality. The Permittee must rely on data sources such as the Total Maximum Daily Loads, the CWA section 303(d) List, and the results of chemical, physical, and biological monitoring performed by the Permittee and compiled by other entities.

2. Prioritization

Part V.F.2 describes the process for the second step in the storm water management framework. Under the prioritization step, the Permittee must rank the WQCs compiled in the assessment to develop a prioritized list of water quality constituents. Ranking the water quality constituents will result in a prioritized list that will be based on an evaluation of whether or not the Permittee’s MS4 is a contributing source to PWQCs. The evaluation of the MS4 contribution must consider potential point and nonpoint sources, such as illegal connections and illicit discharges other NPDES permitted discharges, and land uses. Under the Prescriptive compliance approach, all water quality constituents shall be treated as PWQCs.

3. Reasonable Assurance Analysis

Each water body-pollutant combination identified as a PWQC must be analyzed in a RAA as described in **Part V.F.3**.

The analysis must address each PWQC in a water body-pollutant paired combination and include best management performance data. The Storm Water Management Program must include a RAA that includes a quantitative evaluation of each PWQC as a water body-pollutant paired combination. The analysis may be performed using a model in the public domain. Models to be considered for the RAA include, but are not limited to, land/watershed model (e.g., Hydrologic Simulation Program-FORTRAN (HSPF) model), BMP performance models (e.g., Storm Water Management Model (SWMM) BMP model), or integrated BMP model (e.g., USEPA System for Urban Stormwater Treatment and Analysis Integrational (SUSTAIN) model). Models used for the RAA are expected to possess the following capabilities.

The RAA shall commence with assembly of all available, relevant data, including land use and pollutant loading data, establishment of QA/QC criteria, QA/QC checks of the data, and identification of the data set meeting the criteria for use in the analysis. These data shall be statistically analyzed to determine the best estimate of performance and the confidence limits on that estimate for the pollutants to be evaluated. Based on estimated baseline conditions and pollutant loadings, required pollutant reductions are estimated and best management practices and an implementation schedule will be generated.

The **RAA** shall be submitted with the Permittee's SWMP.

4. Development

The third step in the storm water management framework is described under **Part V.F.4**, which outlines a process to identify water quality improvement and effectiveness assessment approaches and develop a Monitoring Study Design and Implementation Schedule and programmatic elements for the Permittee's Storm Water Management Program. The Storm Water Management Program will be described in the Permittee's Storm Water Management Plan.

The Permittee must identify effective milestones, strategies, and activities to address PWQCs by effectively prohibiting non-storm water discharges into the MS4 and reducing pollutants in storm water discharges to the MEP, in addition to an effective assessment approach. This step also contains specific local water quality monitoring and program element development and implementation requirements with which the Permittee must comply with. Programmatic elements will be developed based on the development and implementation of a Monitoring Study Design and Implementation Schedule, as this permit centers on a storm water management framework.

a. Water Quality Improvement and Effectiveness Assessment Approaches

The Permittee must develop water quality improvement and effectiveness assessment approaches to implement its Storm Water Management Program over the course of the permit. The Permittee must first identify non-water quality and water quality milestones that support program implementation and measure progress towards addressing identified PWQCs. The milestones must be based on measurable criteria or indicators capable of demonstrating incremental progress. Second, the Permittee must identify the approach for monitoring and each program element to address PWQCs and identify metrics for monitoring and each program element to measure the program effectiveness and verify that the program is meeting the established milestones. Finally, the Permittee must develop an effectiveness assessment approach to assess the efficacy of the Storm Water Management Program's water milestones, strategies, and activities.

b. **Monitoring Requirements**

Attachments J and K describe the monitoring requirements necessary to address the PWQCs as the first requirement to identify water quality milestones, strategies, and activities for the Permittee's Storm Water Management Program. **Attachments J and K** establish monitoring and recordkeeping requirements that implement the federal and state laws and/or regulations. Section 308(a) of the CWA, and sections 122.41(h), (j)-(l), 122.44(i), and 122.48 of Title 40 of the Code of Federal Regulations requires that all NPDES permits specify monitoring and reporting requirements. Federal regulations applicable to large and medium MS4s also specify additional monitoring and reporting requirements. (40 C.F.R. §§ 122.26(d)(2)(i)(F) & (d)(2)(iii)(D), 122.42(c).) California Water Code section 13383 further authorizes the Central Valley Water Board to establish monitoring, inspection, entry, reporting, and recordkeeping requirements. The following provides the rationale for the monitoring requirements contained in this Order.

This Order requires each Permittee to develop and implement a Monitoring Study Design and Implementation Schedule for conducting local water quality monitoring. Local water quality monitoring includes chemical, biological and physical subcomponents, and is based on the assessment and prioritization of monitoring data by the Permittee. The Monitoring Study Design must comply with the monitoring requirements provided in **Attachment G** (*Specific Provisions for Total Maximum Daily Loads Applicable to Order R5-2026-0XXX*) and **Attachment H** (*Standard Permit Provisions and General Provisions*). The Monitoring Study Design and Implementation Schedule must include goals, an approach, parameters, types and methods, sampling frequency, locations, and quality assurance/quality control.

The Monitoring Study Design and Implementation Schedule must identify incremental non-water quality and water quality milestones, strategies, and activities that can be used to measure and demonstrate progress or improvements toward addressing those priorities. Water quality milestones, strategies, and approaches developed by the Permittee must be clear and include dates for their achievement consistent with other compliance dates described in this Order (e.g., TMDL compliance dates, reporting due dates). Water quality-based milestones and dates must be developed and implemented for monitoring and program elements and comprehensively consider this Order's storm water management framework.

Each Permittee must develop an implementation schedule that integrates the milestones, dates for their achievement, compliance strategies, and activities described in their SWMP. As part of the monitoring study design and implementation schedule, the Permittee must identify enforceable requirements, milestones and dates for their achievement to control MS4 discharges such that they do not cause or contribute to exceedances of receiving water limitations within a timeframe(s) that is as short as possible, taking into account the technological, operation, and economic factors that affect the design, development, and implementation of the control measures that are necessary. Milestones and dates must relate to a specific water quality endpoint (e.g., a percentage reduction in sediment toxicity or MS4 drainage area is meeting the receiving water limitations, load reduction targets, or assigned waste load allocations).

For the Pollutant Prioritization Approach outlined in **Attachment J**, the Monitoring Study Design and Implementation Schedule must describe the following:

- i. Monitoring Approach
- ii. Monitoring Parameters Types and Methods
- iii. Monitoring Locations
- iv. Quality Assurance/Quality Control

The Monitoring Study Design and Implementation Schedule submittal shall include a Quality Assurance Project Plan (QAPP) in accordance with the QA/QC and other protocols (e.g., Standard Operating Procedures for bioassessment) established by the Surface Water Ambient Monitoring Program (SWAMP). All samples shall be collected and analyzed in accordance with the methods specified in 40 CFR Part 136.

- v. Local Water Quality Monitoring

For the Pollutant Prioritization approach, depending on the status of the current MS4 monitoring program (how long the monitoring program has been in place, what assessments have already been conducted, and the available data), the monitoring program described in the SWMP may include one or more of the following:

- (1) Receiving water monitoring
- (2) Source characterization
- (3) Urban discharge monitoring
- (4) Special studies
- (5) TMDL monitoring

For the Prescriptive Approach outlined in **Attachment K**, the Monitoring Study Design and Implementation Schedule must describe the following:

i. Monitoring Frequency and Locations

Monitoring must be conducted throughout each water year during qualifying rain events, including targeting seasonal first flush events and coordinated, when necessary, with downstream receiving water monitoring to evaluate the influence of urban runoff discharges. A qualifying rain or wet weather event has 0.25 inches of accumulated rainfall over the past 24 hours with a 50-percent (50%) chance of precipitation reported by the National Weather Service. In some regions and drainages, more rainfall may be necessary to cause urban runoff discharges (e.g. from LID or extended detention basins). Monitoring is conducted for pollutants of concern including all pollutants with assigned WQBELs. Parameters to be monitored during dry and wet weather include: flow, pollutants subject to a TMDL applicable to the receiving water, pollutants listed on the CWA section 303(d) list for the receiving water or a downstream receiving water and may include the constituents in **Attachment E, Monitoring Requirements**. Flow is necessary to calculate pollutant loading. Sampling requirements, including methods for collecting flow-weighted composite samples, are consistent with those requirements in previous MS4 permits issued by the Central Valley Water Board.

ii. Monitoring Parameters and Types, and Methods

In addition to PWQCs identified by the Permittee, water quality parameters to be monitored in receiving water and MS4 discharges for **Attachment K** are specified in **Attachment E, Monitoring Requirements**. Hardness, pH and temperature are parameters impacting the effect of pollutants in freshwater (i.e., metals water

quality standards are dependent on hardness, ammonia toxicity is dependent on pH and temperature). Temperature and dissolved oxygen are interdependent and fundamental to supporting aquatic life beneficial uses. Specific conductivity is a parameter important to assessing potential threats to MUN and freshwater aquatic life beneficial uses.

The Monitoring Study Design and Implementation Schedule submittal shall include a Quality Assurance Project Plan (QAPP) in accordance with the QA/QC and other protocols (e.g., Standard Operating Procedures for bioassessment) established by the Surface Water Ambient Monitoring Program (SWAMP). All samples shall be collected and analyzed in accordance with the methods specified in 40 CFR Part 136.

The monitoring data is to be accompanied by rainfall data and hydrographs, and a narrative description of the storm event. This information will allow the Permittee and the Central Valley Water Board staff to evaluate the effects of differing storm events in terms of storm water runoff volume and duration and in-stream effects.

iii. Dry Weather Screening Monitoring

Clean Water Act section 402(p) regulates discharges from MS4s. Clean Water Act section 402(p)(3)(B)(ii) requires the Permittees to effectively prohibit non-storm water from entering the MS4. Non-exempted, non-storm water discharges are to be effectively prohibited from entering the MS4 or become subject to another NPDES permit (55 FR 47990, 47995 (Nov. 16, 1990)). Conveyances which continue to accept non-exempt, non-storm water discharges do not meet the definition of MS4 and are not subject to CWA section 402(p)(3)(B) unless the discharges are issued separate NPDES permits. Instead, conveyances that continue to accept non-exempt, non-storm water discharges that do not have a separate NPDES permit are subject to sections 301 and 402 of the CWA (55 FR 47990, 48037 (16 November 1990)).

iv. MS4 Discharge Monitoring

The purpose of the MS4 discharge monitoring is to characterize the storm water discharges from each Permittee's drainages within each subwatershed. Outfall based monitoring is also conducted to assess compliance with WQBELs. In previous permits issued by the Central Valley Water Board, Permittees have proposed and received approval for customized monitoring programs. The selected outfall(s) should receive drainage from an area representative of the land uses within the portion of its Jurisdictional Runoff Area that drains to the

subwatershed and not be unduly influenced by storm water discharges from upstream jurisdictions or other NPDES discharges. It is assumed that storm water runoff quality will be similar for similar land use areas, and therefore runoff from a representative area will provide sufficient characterization of the entire drainage area. Factors that may impact storm water runoff quality include the land use (industrial, residential, commercial) and the control measures that are applied. Factors that may impact storm water runoff volume include percent effective impervious cover (connected to the storm drain system), vegetation type, soil compaction and soil permeability. Storm water outfall monitoring is linked to receiving water monitoring (see above).

v. Receiving Water Monitoring

The purposes of receiving water monitoring are to measure the effects of storm water and non-storm water discharges from the MS4 to the receiving water, to identify water quality exceedances, to evaluate compliance with TMDL WLAs and receiving water limitations, and to evaluate whether water quality is improving, staying the same or declining. Receiving water is to be monitored during both dry and wet weather conditions to assess the impact of non-storm water and storm water discharges. Wet weather and dry weather are defined in each watershed, consistent with the definitions in TMDLs approved within the watershed. Monitoring is to commence as soon as possible after linked outfall monitoring in order to be reflective of potential impacts from MS4 discharges. At a minimum, the parameters to be monitored and the monitoring frequency are the same as those required for the linked outfalls.

vi. Bioassessment

The purpose of the bioassessment requirement is to assess the biological integrity of receiving waters, detect biological responses to pollution, identify probable causes of impairment not detected by chemical and physical water quality analysis, and provide a more holistic approach to evaluating processes of the waterways for designing effective BMPs. Bioassessment data will be used to continue assessment of biological integrity of receiving water, establishing Index of Biological Integrity (IBI) reference stations, and assisting the statewide SWAMP's long-term goal of utilizing bioassessment to develop biocriteria for a variety of eco-regions and land-use dominated areas in California. Bioassessment sampling and measurement protocols must be collected consistent with SWAMP protocols described in this Order. Bioassessment sampling must occur at least once during the permit term.

5. CWA section 303(d) Listed Impairments and TMDL (Water Quality Based Plans)

- a. **Attachment G** (*Specific Provisions for Total Maximum Daily Loads Applicable to Order R5-2026-0XXX*) provides requirements to be included in the Monitoring Study Design and Implementation Schedule.
- b. **Sediment and Water Column Toxicity Monitoring.** Toxicity testing and evaluation protocols for sediment and water column toxicity (e.g., aquatic toxicity) monitoring and collection of samples are provided in **Attachment E, Monitoring Requirements**.¹¹⁶ Aquatic toxicity monitoring is required in receiving waters during wet weather conditions. Where specified in **Attachment G**, aquatic toxicity testing measures test species toxicity and integrates synergistic effects of known and unidentified pollutants.
- c. **Quality Assurance/Quality Control.** All sampling and analysis methods must meet QA/QC and other protocols established by SWAMP. Collected monitoring data shall be uploaded for each water year (July 1 to June 30) to the California Environmental Data Exchange Network (CEDEN), or the Storm Water Multi-Application Reporting and Tracking System (SMARTS) database when available. All samples should be collected and analyzed in accordance with the methods specified in 40 CFR Part 136.

6. Regional Monitoring Program

This Order also provides for a regional monitoring program participation option to address all or part of the local water quality monitoring requirements of this Order. The process for the regional monitoring program participation option is outlined in **Attachments J and K**. The Permittee may participate in a regional monitoring program (RMP) in lieu of all or part of the local water quality monitoring requirements of this Order in a cost efficient and effective manner. Permittees that elect to participate in a RMP may request a reduction in some or all of the local water quality monitoring specified in the monitoring requirements of this Order. Currently there is a RMP for the Delta area¹¹⁷. Participation in a RMP by a Permittee shall consist of providing funds and/or in-kind services to the RMP at least equivalent to discontinued individual monitoring and study efforts.

¹¹⁶ Summary of Toxicity in California Waters: 2001-2009, J. Hunt, D. Markiewiez, and M. Pranger, State Water Resources Control Board, prepared for the Surface Water Ambient Monitoring Program, November 2010.

¹¹⁷ The Delta RMP is an identified priority in the State Water Resources Control Board's and Central Valley Water Board's Delta Strategic Plan, and the Delta RMP is recommended in the Delta Plan adopted by the Delta Stewardship Council.

B. Development of Storm Water Management Plan

Attachments J and K include the Pollutant Prioritization or Prescriptive requirements for describing each of the components that must be included in the Permittee's Storm Water Management Program. **Attachment J** provides requirements for a Pollutant Prioritization approach, while **Attachment K** includes Prescriptive requirements. Implementation of the components of each Permittee's Storm Water Management Program must be consistent with the water quality milestones, strategies, and activities identified in the Permittee's Storm Water Management Plan. The rationale for each program element described under **Attachment J or K** is described hereon.

1. Legal Authority Establish and Enforcement

Each Permittee is required to establish and enforce sufficient legal authority to control discharges to the MS4 within its Jurisdictional Runoff Area as described under **Attachments J and K** of this Order. The Order provides minimum criteria that each Permittee must include to update their legal authority forming a stable foundation for each jurisdiction to exercise its authority implementing their Storm Water Management Programs, including the development and implementation of Enforcement Response policies and procedures.

Pursuant to 40 CFR 122.26(d)(1)(ii) and 40 CFR 122.26(d)(2)(i), each Permittee must have sufficient "*legal authority to control discharges to the municipal separate storm sewer system*" and be able to demonstrate that it can "*operate pursuant to legal authority established by statute, ordinance or series of contracts.*" **Attachments J and K** describe the minimum legal authorities each Permittee must establish for itself within its Jurisdictional Runoff Area to control discharges to its MS4. The requirements contained in **Attachments J and K** are consistent with the requirements set forth in 40 CFR 122.26(d)(2)(i)(A)-(F) and 122.34, as applicable.

Pursuant to 40 CFR 122.26(d)(1)(ii) and 40 CFR 122.26(d)(2)(i), each Permittee must have sufficient "*legal authority to control discharges to the municipal separate storm sewer system*" and be able to demonstrate that it can "*operate pursuant to legal authority established by statute, ordinance or series of contracts*" to control the discharge of non-storm water and pollutants in storm water to and from its MS4. Pursuant to 40 CFR 122.26(d)(2)(i)(E) each Phase I MS4s Permittees are specifically required to have the legal authority to "*[r]equire compliance with conditions in ordinances, permits, contracts or orders.*" Phase II MS4s are required to effectively prohibit non-storm water discharges through ordinance, or other regulatory mechanism, to the extent allowed under the law (40 CFR 122.34(B)(3)(ii)(B); 40 CFR 122.34(b)(4)(ii)(A); 40 CFR 122.34(b)(5)(ii)(B)). The requirements in **Attachments J and K** are necessary to demonstrate that each Permittee can enforce its legal authority to "*effectively prohibit non-stormwater discharges*"

and “*reduce the discharge of pollutants to the MEP*” as well as “[r]equire compliance with conditions in ordinances, permits, contracts or order.”

Enforcement Response procedures required under **Attachments J and K** will serve as a reference for the Permittee and the Central Valley Water Board to determine if consistent enforcement actions are being implemented to achieve timely and effective compliance from all public and private entities that are not in compliance with the Permittee’s ordinances, permits, or other requirements. The Enforcement Response procedures must include approaches and options, violation corrections, escalated enforcement definition, and reporting non-compliant sites. The Enforcement Response procedures must contain clear direction for each Permittee to take immediate enforcement action, when appropriate and necessary, in their illicit discharge detection and elimination, development planning, construction management, and industrial, commercial, and municipal operation programs. Proper implementation of the Enforcement Response procedures is necessary to effectively prohibit non-storm water discharges to the MS4 and reduce the discharge of pollutants in storm water from the MS4 to the MEP. A description of the Enforcement Response procedures must be submitted with the Permittee’s SWMP.

If the entities subject to a Permittee’s legal authority do not implement appropriate corrective actions in a timely manner, or if violations repeat, the Permittee must take progressively stricter responses to enforce its legal authority and achieve compliance with its ordinances, permits, or other requirements to “*effectively prohibit non-stormwater discharges*” and “*reduce the discharge of pollutants to the MEP.*”

2. Fiscal Analysis

The Permittee is required to secure the resources necessary to meet the permit requirements of this Order, including identifying the expenditures necessary to achieve the milestones, strategies, and activities of its Storm Water Management Program. In accordance with 40 CFR 122.42(c)(5), Annual Reports must include annual expenditures and a budget for the following year (July 1 through June 30). The Central Valley Water Board has chosen to only require fiscal analyses as part of the Permittee’s Mid-Term and End-Term Reports that include quantitative and qualitative components. The fiscal analysis requirements should address jurisdiction-wide fiscal benefits of protection including, public health, tourism, property values, economic activity, and beneficial uses to assist the Permittee improve the allocation of resources and secure adequate funding for the program. The Central Valley Water Board encourages the Permittee to consider means for conducting assessments of fiscal benefits derived from the programs. Such

assessments could be conducted on a regional scale similar to studies of program costs conducted by the State Water Board.¹¹⁸

Each Permittee is required to secure the resources and provide an analysis of the resources that will be necessary to implement the requirements of the Order, as described in **Attachments J and K**. Adequate fiscal resources are necessary for a Storm Water Management Program to effectively prohibit non-storm water discharges to the MS4 and reduce pollutants in storm water from the MS4 to the MEP.

According to 40 CFR 122.26(d)(2)(vi), each Permittee is responsible for providing “a fiscal *analysis of the necessary capital and operation and maintenance expenditures necessary to accomplish the activities*” required by this Order, including “a *description of the source of funds that are proposed to meet the necessary expenditures, including legal restrictions on the use of such funds.*” The fiscal analysis requirements of **Attachments J and K** are consistent with 40 CFR 122.26(d)(2)(vi).

3. Illegal Connection and Illicit Discharge Elimination Program

Under **Attachment J or K**, each Permittee is required to implement an illicit discharge detection and elimination program. Such programs facilitate compliance with the CWA’s effective prohibition of non-storm water discharges into the MS4 by actively detecting and eliminating illicit discharges into, and connections to, their MS4s. **Attachment J or K** establishes the minimum requirements that each Permittee must implement within its Jurisdictional Runoff Area to prevent and eliminate illicit discharges, and effectively prohibit non-storm water discharges, from entering its MS4. Under this program element, the Permittee is required to develop and implement Spill Response procedures. For efficiency and cost-effectiveness, a description of the procedures will be submitted with the Permittee’s SWMP.

The federal CWA requires permits for municipal storm sewer systems to “*effectively prohibit non-storm water discharges into the storm sewers.*” Under 40 CFR 122.26(d)(2)(iv)(B)¹¹⁹, each Permittee must implement a “*program...to detect and remove...illicit discharges and improper disposal into the storm sewer.*” The federal NPDES regulations, under 40 CFR 122.26(b)(2), define illicit discharges as “*any discharge to a municipal separate storm sewer that is not composed entirely of storm water.*” Thus, non-storm water discharges are not authorized to enter the MS4 and are considered to be illicit discharges, unless authorized by a separate NPDES permit.

¹¹⁸State Water Board, 2005.NPDES Stormwater Cost Survey.

¹¹⁹ See 40 CFR 122.34(b)(3) for Phase II MS4 Illicit Discharge Detection and Elimination Program.

The Phase I Final Rule clarifies that non-storm water discharges through an MS4 are not authorized under the CWA (55 FR 47995):

“Today’s rule defines the term “illicit discharge” to describe any discharge through a municipal separate storm sewer system that is not composed entirely of storm water and that is not covered by an NPDES permit. Such illicit discharges are not authorized under the Clean Water Act. Section 402(p)(3)(B) requires that permits for discharges from municipal separate storm sewers require the municipality to “effectively prohibit” non-storm water discharges from the municipal separate storm sewer...Ultimately, such non-storm water discharges through a municipal separate storm sewer must either be removed from the system or become subject to an NPDES permit.”

The federal NPDES requirements for the program to address illicit discharges must include *“inspections, to implement and enforce an ordinance, orders, or other similar means to prevent illicit discharges to the MS4.”* The federal NPDES regulations also reference several categories of *“non-storm water discharges or flows [which] shall be addressed where such discharges are identified...as sources of pollutants to waters of the United States.”* The Phase I Final Rule (55 FR 48037) further clarified the requirements of 40 CFR 122.26(d)(2)(iv)(B)(1) as follows:

“EPA is clarifying that section 402(p)(3)(B) of the CWA (which requires permits for municipal separate storm sewers to ‘effectively’ prohibit non-storm water discharges) does not require permits for municipalities to prohibit certain discharges or flows of non-storm water to waters of the United States through municipal separate storm sewers in all cases.”

In previous iterations of the municipal storm water permits for the Central Valley Region, these categories were simply listed and referred to as categories of non-storm water discharges “not prohibited” unless identified as a source of pollutants. The Permittee have often referred to these categories as “exempt” discharges. In both cases, however, that language is inconsistent with the federal CWA and NPDES regulations. The clarification provided in the Phase I Final Rule does not specifically state that such discharges are “not prohibited” or “exempt” or in any way authorized. The federal NPDES regulations do, however, state that specific categories of non-storm water discharges must be “addressed” if identified as *“sources of pollutants to waters of the United States.”*

The language of **Part II** is consistent with the language of the CWA and the requirements of the federal regulations under 40 CFR 122.26(d)(2)(iv)(B)(1). **Part II** requires each Permittee to address all types of non-storm water discharges into its MS4 as illicit discharges, unless the discharge is authorized by a separate NPDES permit, or identified as a category of non-storm water discharges or flows that must be addressed pursuant to **Part II**. Only non-NPDES-permitted non-storm water discharges identified as a category of non-storm water discharges under **Part II** and not identified as a source of pollutants do not have to be addressed as illicit discharges.

Non-storm water categories listed in 40 CFR 122.26(d)(2)(iv)(B)(1) and 40 CFR 122.34(b)(3)(iii)¹²⁰ are listed under **Part II** and generally fall into four categories: (1) non-storm water discharges subject to existing State Water Board or Central Valley Water Board waste discharge requirements and NPDES permits; (2) non-storm water discharges generally not expected to be a source of pollutants to receiving waters; (3) non-storm water discharges likely to contain pollutants requiring some form of control to address the pollutants prior to discharging to the MS4; and (4) non-storm water discharges or flows associated with firefighting.

Part II includes several categories of non-storm water discharges listed in 40 CFR 122.26(d)(2)(iv)(B)(1) for which the Central Valley Water Board or State Water Board has developed general waste discharge requirements and NPDES permits to address the discharges. The Permittee is only required to address these types of non-storm water discharges as illicit discharges if the Permittee or the Central Valley Water Board identifies these non-storm water discharges not having coverage under the applicable NPDES permit or as a source of pollutants to receiving waters. Generally, if these types of non-storm water discharges have coverage under an NPDES permit and are identified as a source of pollutants to receiving waters, the Permittee would be expected to identify the responsible dischargers and report their identities to the Central Valley Water Board. The Central Valley Water Board would then have the responsibility to enforce the NPDES permit and/or waste discharge requirements.

Part II includes several categories of non-storm water discharges listed in 40 CFR 122.26(d)(2)(iv)(B)(1) which are generally not expected to be a source of pollutants to receiving waters, many of which originate from what are typically natural, uncontrollable sources. The Permittee is only required to address these types of non-storm water discharges as illicit discharges if the Permittee or the Central Valley Water Board identifies these non-storm water discharges as a source of pollutants to receiving waters. Because many of these sources are generally uncontrollable, enforcing a prohibition may not be

¹²⁰ 40 CFR 122.34(b)(3)(iii) does not list essential non-emergency or emergency firefighting activities as a category of non-storm water discharges or flows under **Provision II.B (Discharge Prohibitions)**.

a possibility for the Permittee. The Permittee would be able to address these non-storm water discharges by preventing these non-storm water discharges from entering the MS4. This could potentially be achieved by sealing their MS4 structures so the discharges cannot enter the MS4.

Part II includes several categories of non-storm water discharges listed in 40 CFR 122.26(d)(2)(iv)(B)(1) that are likely to contain pollutants requiring some form of control to address the pollutants prior to discharging to the MS4. At this time, an outright prohibition of these types of non-storm water discharges does not yet appear to be warranted. Thus, **Part II** includes several requirements for the Permittee to control the pollutants from these types of non-storm water discharges. This is consistent with the clarification of the federal regulations in the Phase I Final Rule (55 FR 48037), which states the Central Valley Water Board has the authority to require the Permittee to *“control any of these types of discharges where appropriate.”*

Unlike non-storm water discharges from over-irrigation, these types of non-storm water discharges are not expected to occur in close proximity to each other or very frequently. Provided these types of non-storm water discharges are controlled as required in **Part II**, the Permittee would only be required to address these types of non-storm water discharges as illicit discharges if the Permittee or the Central Valley Water Board identifies these non-storm water discharges as a source of pollutants to receiving waters.

Part II includes specific requirements for firefighting discharges and flows. The requirements for non-storm water discharges and flows associated with firefighting have been separated into requirements for: a) non-emergency firefighting discharges and flows, and b) emergency firefighting discharges and flows.

Discharges from building fire suppression system maintenance (e.g. fire sprinklers) may contain waste and may potentially be a significant source of pollutants to receiving waters. As such, the Central Valley Water Board is requiring these discharges be addressed as illicit discharges by the Permittee. Thus, the discharges to the MS4 are to be prohibited via ordinance, order or similar means. For other non-emergency firefighting discharges and flows (i.e., flows from controlled or practice blazes, firefighting training, and maintenance activities not associated with building fire suppression systems), the Permittee is required to develop and implement a program to address pollutants in these non-storm water discharges and flows. This is consistent with the clarification of the federal regulations in the Phase I Final Rule (55 FR 48037), which states the Central Valley Water Board has the authority to require the Permittee to *“control any of these types of discharges where appropriate.”*

For emergency firefighting discharges and flows, the Phase I Final Rule (55 FR 48037) has clarified the requirements of 40 CFR 122.26(d)(2)(iv)(B)(1) pertaining to emergency firefighting flows and discharges, which states:

“In the case of firefighting it is not the intention of these rules to prohibit in any circumstances the protection of life and public or private property through the use of water or other fire retardants that flow into separate storm sewers.”

Thus, the requirements have been made to be consistent with the guidance provided by the Phase I Final Rule. The Order recommends that the Permittee develop and encourage implementation of BMPs to reduce or eliminate the discharge of pollutants from emergency firefighting flows to the MS4s and receiving waters.

The Permittee is expected to review the dry weather MS4 outfall discharge monitoring data they collect to determine if and when there are non-storm water discharges to or from their MS4s that are a source of pollutants to receiving waters. If the Permittee identifies one of the types of non-storm water discharges listed in **Part II** as a source of pollutants to receiving waters based on the review and evaluation of monitoring data, **Part II** requires the Permittee to prohibit those categories of discharges from entering the MS4 through ordinance, order or similar means.

Part II also clarifies that the Central Valley Water Board may identify categories of non-storm water discharges or flows listed under **Part II** that must be prohibited. This is consistent with the clarification of 40 CFR 122.26(d)(2)(iv)(B)(1) in the Phase I Final Rule (55 FR 48037), which states the Central Valley Water Board may *“require municipalities to prohibit or otherwise control any of these types of discharges where appropriate.”*

Finally, **Part II** has been included in the requirements for non-storm water discharges to clarify that any non-storm water discharges to the Permittee’s MS4 even those identified pursuant to **Part II** must be reduced or eliminated. USEPA’s NURP study showed that many storm water outfalls continued to discharge during substantial dry periods and that pollutant levels during significantly elevated, degrading water quality. **Part II.B** is consistent with the requirements of CWA section 402(p)(3)(B)(ii) and 40 CFR 122.26(d)(1)(v)(B), as clarified in the Phase I Final Rule (55 FR 47995) that *“[u]ltimately, such non-storm water discharges through a municipal separate storm sewer must either be removed from the system or become subject to an NPDES permit.”*

Outfall Mapping and Illicit Discharge Source/Facility Inventory

Consistent with 40 CFR 122.26(d)(2)(iv)(B) and 122.26(d)(2)(iv)(B)(1), each Permittee must implement a *“program...to prevent illicit discharges to the*

municipal storm sewer system” and “detect...illicit discharges and improper disposal into the storm sewer.” Attachment J or K requires each Permittee to implement measures to prevent and detect illicit discharges and connections to its MS4 as part of its illicit discharge detection and elimination program.

As part of the program to prevent and detect illicit discharges to the MS4, 40 CFR 122.26(d)(2)(iv)(B)(2) requires “*procedures to conduct on-going field screening activities during the life of the permit, including areas or locations that will be evaluated by such field screens.*” Under the Prescriptive path, each Permittee is required to maintain an updated map and inventory of its entire MS4 and the corresponding drainage areas within its Jurisdictional Runoff Area. Having knowledge about where inlets, access points, connections with other MS4s, and outfalls are located is necessary for each Permittee to track, identify, and eliminate illicit discharges and connections as part of this process. Thus, **Attachment K** of the Order specifies that the map and inventory must include the segments of the storm sewer system owned, operated, and maintained by each Permittee, and include locations of all known inlets, connections with other MS4s, and outfalls to each Permittee’s MS4. The remaining requirements of **Attachment K** are consistent with the requirements of 40 CFR 122.26(d)(2)(iv)(B)(3)-(7) related to implementing measures to prevent and detect illicit discharges and connections to the MS4.

Field Sampling for Illicit Discharges

Under the Prescriptive path, **Attachment K** requires each Permittee to conduct field screening and monitoring of MS4 outfalls and other portions of its MS4 within its Jurisdictional Runoff Area to detect non-storm water and illicit discharges and connections to the MS4. Field screening is a required element of the program to detect and eliminate illicit discharges and connections to the MS4, pursuant to 40 CFR 122.26(d)(2)(iv)(B)(2).

Illicit Discharge Source Investigation and Elimination

Under the Prescriptive path **Attachment K** specifies the measures each Permittee must implement to eliminate illicit discharges and connections to its MS4. Elimination of illicit discharges and connections to the MS4 is consistent with the requirement of 40 CFR 122.26(d)(2)(iv)(B) “*to detect and remove [emphasis added]...illicit discharges and improper disposal into the storm sewer*” and will achieve the CWA requirement for MS4 permits to “*effectively prohibit non-storm water discharges into the storm sewers.*”

Generally, each Permittee is responsible for prioritizing its efforts to eliminate non-storm water and illicit discharges or connections to its MS4 based on field screening and monitoring data, illicit discharge investigation records, and the known or suspected sources. Sources of non-storm water and illicit discharges or connections must be eliminated by enforcing the legal authority established by each Permittee pursuant to **Attachment J or K**. Under this

requirement, the Permittee is required to identify and investigate illegal connections, promote and facilitate public reporting of non-storm water discharges and spills, and develop and implement education and training with staff, contractors, and the public.

4. Construction Site Storm Water Runoff Control Program

Each Permittee is required to implement a construction management program to control and reduce the discharge of pollutants in storm water from construction sites to the MEP, as described under **Attachment J or K**. Proper implementation of the construction management program will contribute toward effectively prohibiting non-storm water discharges from construction sites to the MS4. Pursuant to 40 CFR 122.26(d)(2)(iv)¹²¹, each Permittee is required to implement a “*management program...to reduce the discharge of pollutants to the MEP using management practices, control techniques and system, design and engineering methods, and other such provisions where applicable.*” As part of the management program, 40 CFR 122.26(d)(2)(iv)(D) requires “*a program to implement and maintain structural and non-structural BMPs to reduce pollutants in storm water runoff from construction sites to the municipal storm sewer system.*”

Construction sites can be significant sources of sediment, trash, and other pollutants to receiving waters. Although sediment is naturally occurring in the natural environment, the discharge of sediment under unnatural conditions is problematic to receiving waters. Fine sediment in creeks causes high turbidity that interferes with the functionality of native flora and fauna in local creeks. For example, turbidity interferes with both photosynthesis of water plants, as well as successful foraging and reproduction of benthic macroinvertebrates. Sediment can also make it difficult for fish to breathe because it clogs fish gills. Other pollutants such as heavy metals or pesticides can adhere to sediment and are transported to receiving waters during storm events, where they dissolve in the water column and can become bioavailable to aquatic organisms. Sediment is recognized as a major stressor to surface waters and is responsible for the impairment of several lagoons and creeks in the Central Valley region.

Under the Prescriptive path, **Attachment K** includes requirements that each Permittee must implement to minimize the discharge of sediment and other pollutants from construction sites to the MS4 within its Jurisdictional Runoff Area. The requirements under **Attachment K** are consistent with the previous MS4 permits issued by the Central Valley Water Board and apply to private and public construction sites. Therefore, Permittee are expected to implement the requirements seamlessly, with minimal changes to their existing construction management programs. Under the Pollutant Prioritization path described under **Attachment K**, the Permittee is given more flexibility to run

¹²¹ See 40 CFR 122.34(b)(4) for Phase II MS4 Construction Site Storm Water Runoff Control Program.

its Storm Water Management Program as needed to maximize efficiency, and also to be consistent with the Storm Water Management Plan within its Jurisdictional Runoff Area. The Construction Site Storm Water Runoff Control Program includes measures such as development, implementation, and enforcement of best management practice requirements at all construction sites; developing a construction site inventory and plan review and approval procedures; and site inspection and enforcement.

BMP Requirements for All Construction Sites

Pursuant to 40 CFR 122.26(d)(2)(iv)(D)(2) each Permittee is required describe “requirements *for nonstructural and structural BMPs*” at construction sites. Under the Prescriptive approach, **Attachment K** includes the types of construction site BMPs that the Permittee must implement, or require the implementation of, at each construction site to reduce pollutants in storm water discharges to the MEP.

Each Permittee is expected to require the implementation of appropriate BMPs given specific site conditions, the season and likelihood of rain events, and construction phase (i.e. grading vs. vertical construction). This means that throughout the life of the project construction, the appropriate BMPs will vary, especially if the construction of the project spans multiple wet seasons. As opposed to describing specific minimum BMPs that must be implemented, the Order describes major BMP categories that should be considered for each site.

Each Permittee is expected to use its prior years of storm water experience and knowledge to require implementation of appropriate BMPs from the various categories at each construction site within its Jurisdictional Runoff Area. For example, the Central Valley Water Board expects that each site will be required to implement erosion control and sediment control at each construction site. The Central Valley Water Board also expects each Permittee to require implementation of active/passive sediment treatment systems at sites where other BMPs have been tried and are known to be inadequate, and discharges of sediment are causing or contributing to water quality impairment downstream. Each Permittee is granted flexibility in specifying the minimum level of BMP requirements at each site, but the Central Valley Water Board expects each site to be capable of controlling pollutants in storm water discharges to the MEP and preventing illicit discharges.

Construction Site Inventory

Under the Prescriptive approach, the requirements contained in **Attachment K** provide the data and information necessary to identify “*priorities for inspecting sites and enforcing control measures*” required pursuant to 40 CFR 122.26(d)(2)(iv)(D)(3). Further, under this path, each

Permittee must identify construction sites that are considered a high threat to downstream surface waters. Designation of “high threat to water quality” construction sites will necessitate the Permittee to develop criteria to identify such sites. **Attachment K** describes a list of factors that must be considered when the Permittee considers threat to water quality. For example, a Permittee must identify sites as “high threat to water quality” if the site is located within a hydrologic subarea where sediment is known or suspected to contribute to the water quality conditions, according to the Storm Water Management Plan. This ensures that construction management program implementation is compatible with the Permittee’s identified water quality conditions.

Construction Plan Review and Approval Procedures

As part of the construction management program, 40 CFR 122.26(d)(2)(iv)(D)(1) requires “*procedures for site planning which incorporate consideration of potential water quality impacts.*” Under the Prescriptive path, **Attachment K** describes the minimum elements each Permittee is required to include as part of the construction site planning and project approval process. The construction site planning and approval process is based primarily on ensuring each project had an adequate site-specific pollution control, construction BMP, and/or erosion and sediment control plan (ESCP) that will be implemented to minimize the discharge of pollutants in storm water to the MEP and minimize impacts to receiving waters.

Construction Site Inspection and Enforcement

Under the Prescriptive approach, the requirements under **Attachment K** are necessary to demonstrate that each Permittee is implementing a program to ensure BMPs at construction sites will reduce pollutants in storm water discharges to the MEP. Pursuant to 40 CFR 122.26(d)(1)(ii) and 40 CFR 122.26(d)(2)(i), each Permittee must have sufficient “*legal authority to control discharges to the municipal separate storm sewer system.*” Where enforcement is necessary for any development projects to compel compliance and ensure the pollutants in storm water discharges from the MS4 are reduced and continue to be reduced to the MEP, each Permittee is required to enforce its legal authority established pursuant to **Part III.C.6.a or b**, and in accordance with its Enforcement Response Plan required to be developed pursuant under the same provision.

Under the Pollutant Prioritization path, **Attachment J** does not include minimum required inspection frequencies for construction sites, but inspection frequency is stated under the Prescriptive path (**Attachment K**). Each Permittee must use its experience and knowledge to specify an appropriate inspection frequency for both high priority and lower priority sites in their Storm Water Management Plans and in accordance with the Storm Water Management Program. Appropriate inspection frequencies may vary by

Permittee, but the Central Valley Water Board expects that the stated frequency will be adequate for each Permittee to properly oversee the construction sites within its Jurisdictional Runoff Area, confirm BMPs are implemented to reduce pollutants in storm water discharges from construction sites to the MEP, and make needed changes to its program on an ongoing basis as necessary.

5. Industrial, Commercial, and Municipal Facilities Storm Water Runoff Control Programs

Attachment J or K requires each Permittee to implement industrial, commercial, and municipal operation programs to control and reduce the discharge of pollutants in storm water discharges from industrial, commercial, and/or municipal areas to the MEP. Proper implementation of the industrial, commercial, and municipal operation programs will also contribute toward effectively prohibiting non-storm water discharges from industrial, commercial, and/or municipal areas to the MS4.

Pursuant to 40 CFR 122.26(d)(2)(iv)¹²², each Permittee is required to implement a *“management program...to reduce the discharge of pollutants to the MEP using management practices, control techniques and system, design and engineering methods, and other such provisions where applicable.”* Within 40 CFR 122.26(d)(2)(iv)(A) and (C), the management program is required to reduce impacts on receiving waters and reduce pollutants in storm water discharges to the MEP from commercial and industrial facilities, and municipal facilities.

Commercial, industrial facilities and municipal facilities must be addressed by each Permittee with the industrial, commercial, and municipal operation programs required under **Attachment J or K**. Areas being developed or under construction will be addressed by the Permittee under the other requirements described under **Attachment J or K**, such as Planning and Land Development/Post Construction Storm Water Management Program or Construction Site Storm Water Control Program.

Industrial, commercial, and/or municipal areas typically include impervious surfaces, such as sidewalks, driveways, roads, and rooftops, which generate and concentrate pollutants (such as pesticides, petroleum hydrocarbons, heavy metals, and pathogens) that are otherwise not found in high concentrations in the natural environment. Pollutants that accumulate on impervious surfaces are not easily biodegraded or not subject to natural treatment processes. When it rains, these pollutants can be transported in storm water runoff from these impervious surfaces into receiving waters, resulting in poor water quality and degradation of beneficial uses.

¹²² See 40 CFR 122.34(b)(6) for Phase II MS4 Pollution Prevention/Good Housekeeping for Municipal Operations Program.

In addition to the generation of pollutants, areas of industrial, commercial, and municipal operation have generally altered the natural conditions of the land and removed vegetative cover, reduced the perviousness of the surface, and reduced the capacity of storm water that can be intercepted, captured, stored, infiltrated, evaporated, and/or evapotranspired. The alteration of the natural conditions and the impervious surfaces associated with areas of industrial, commercial, and municipal operations causes water quality problems due to the alteration of natural flow regimes within the watersheds, resulting in hydromodification of channels, streams and habitats that exist within or adjacent to areas of industrial, commercial, and municipal operations.

Thus, storm water discharges from areas of industrial, commercial, and municipal operation can be responsible for poor water quality, degraded habitats, and hydromodified channels throughout the developed portions of the watersheds in the Central Valley region. To improve the health and functionality of the receiving waters in the region, land use practices and storm water runoff from impervious surfaces in areas of industrial, commercial, and municipal operation must be managed to reduce the various impacts caused by hydromodification and pollutants from storm water runoff generated in developed areas. Each Permittee must be aggressive in tackling pollutant sources and runoff from areas of industrial, commercial, and municipal operation to be able to reduce pollutants in storm water discharges from the MS4 to the MEP.

The requirements under **Attachment J or K** build upon existing industrial, commercial, and municipal operation programs being implemented by the Permittee. These requirements are generally consistent with the industrial, commercial, and municipal operation program requirements found in previous permits in the Central Valley region but modified in **Attachment J** to provide more flexibility to implement the programs so resources can be better focused toward addressing the highest priority water quality conditions identified in the Permittee's SWMP. In general, the industrial/commercial, and municipal operations programs include measures to track, assess, prioritize, and inspect pollutant sources, implement best management practices, and develop enforcement capability. The Municipal Operations Storm Water Reduction Program includes an additional requirement for the Permittee to develop and implement Storm Water Pollution Prevention Plans at pollutant priority areas.

Track and Inspect Industrial, Commercial, and Municipal Facilities

Under the Prescriptive path, **Attachment K** includes the information that must be included in the inventory and specifies what facilities or areas must be included. A commercial facility may be identified in the inventory as a facility (e.g. individual building, individual business) or an area (e.g. shopping center, commercial zone). An industrial facility must be identified in the inventory by facility (e.g. individual industrial entity). A municipal facility must be identified

in the inventory by facility, with a list of specific municipal facilities that must be included in the inventory.

Knowledge of the sources of industrial, commercial, and municipal operations likely contributing to the highest priority water quality conditions is expected to be a key element in the Permittee development of the water quality improvement strategies that will be included in its Storm Water Management Plan. The strategies described in the Storm Water Management Plan will direct the industrial, commercial, and municipal operation programs implemented by the Permittee.

Implementation of Effective Best Management Practices

Pursuant to 40 CFR 122.26(d)(2)(iv)(A) each Permittee is required describe "structural *and source control measures to reduce pollutants*" in storm water runoff discharged from areas of industrial, commercial, and municipal operations. Under the Prescriptive path, **Attachment K** includes the BMP implementation and maintenance requirements that each Permittee must require at industrial, commercial, or municipal areas of industrial, commercial, and municipal operations to reduce pollutants in storm water discharges to the MEP. The Central Valley Water Board, however, recognizes that BMP implementation and maintenance for residential areas will require much more education and encouragement through less authoritative measures than for commercial, industrial and municipal facilities and areas. Thus, the BMP implementation and maintenance requirements have been separated between requirements under **Attachment K** for commercial, industrial and municipal facilities and areas.

Most of the requirements in **Attachment J or K** are consistent with the related requirements in the previous permits issued by the Central Valley Water Board. Under the Pollutant Prioritization path, the level of specificity, however, has been changed to allow each Permittee the flexibility to implement its program to achieve maximum efficiency, and to perform functions that will address the highest priority water quality conditions identified in a Storm Water Management Plan. Each Permittee is expected to require the implementation of appropriate BMPs to address the expected pollutants from each industrial, commercial, or municipal facility or area. Consistent with previous permit requirements, each Permittee is required to maintain, or require the maintenance of, all BMPs as needed.

Permittees, as covered and required under State Water Board Order No. 2006-0003-DWQ, *Statewide General Waste Discharge Requirements for Sanitary Sewer System* (amended by State Water Board Order No. WQ 2008-0002-EXEC, on 20 February 2008), must report sanitary sewer overflows and spills to the State Water Board under the Sanitary Sewer Overflow Reduction Program and California Integrated Water Quality System, commonly referred to as CIWQS. If covered under that permit, the Permittee

is separately required to develop a Sewer System Management Plan which addresses their legal authority to "...prevent illicit discharges into its sanitary sewer system (examples may include [inflow and infiltration], stormwater, chemical dumping, unauthorized debris and cut roots, etc.)." For MS4s that do not have sanitary sewer authority, but have MS4 infrastructure co-located near sanitary sewers, those Permittee must develop and implement an overflow emergency response plan outlining procedures for addressing illicit discharges from a sanitary sewer system to the MS4.

The BMP implementation and maintenance requirements include a schedule of operation and maintenance activities for the MS4 and related structures (such as catch basins, storm drain inlets, and detention basins), as well as public streets and roads. Public streets and roads specifically include public rural, unpaved roads.

Inspection and Enforcement

Attachment K describes industrial, commercial, and municipal site inspection frequency, content, and tracking that each Permittee must incorporate into their industrial, commercial, and municipal operation programs. These requirements are necessary to demonstrate each Permittee is implementing a program that ensures BMP implementation in industrial, commercial, and municipal areas will reduce pollutants in storm water discharges to the MEP. This Order does not stipulate a minimum inspection frequency and directs the Permittee to develop an inspection procedure describing methods to inspect. The Permittee may consider onsite inspections or drive-by inspections. Inspections may be performed by the Permittee's municipal and contract staff, or by volunteer monitoring or patrol programs. Volunteer monitoring or patrol programs are not expected to enforce the Permittee's ordinances, or to inspect areas or facilities where members of the public are not allowed access. Volunteer monitoring or patrol programs must be trained by the Permittee and are only expected to collect visual observations. By utilizing drive-by inspections and volunteer monitoring or patrol programs, the Permittee will be able to maximize and efficiently use their resources to identify and address sources of pollutants in areas of industrial, commercial, and municipal operations.

Pursuant to 40 CFR 122.26(d)(1)(ii) and 40 CFR 122.26(d)(2)(i), each Permittee must have sufficient "*legal authority to control discharges to the municipal separate storm sewer system.*" Where enforcement is necessary for any development projects to compel compliance and ensure the pollutants in storm water discharges from the MS4 are reduced and continue to be reduced to the MEP, each Permittee is required to enforce its legal authority established pursuant to **Attachment J or K**, and in accordance with its Enforcement Response Plan required to be developed pursuant under the same provision.

Under the Prescriptive path, the inspection content specified in **Attachment K** includes the information required to be collected during an inspection by any method. The inspection content includes additional information that must be collected and specifies the information that each Permittee must maintain in its inspection records for a minimum of three (3) years.

6. Training, Public Education and Participation

Under **Attachment J**, the Permittee is required to implement a training, public education and participation program. Under **Attachment K**, each Permittee is only required to implement a public education and participation program since training requirements are described under each program element separately. Proper implementation of the training, public education and participation program as part of its Storm Water Management Program will contribute toward effectively prohibiting non-storm water discharges to the MS4, and toward the reduction of pollutants in storm water from the MS4 to the MEP.

Attachment K establishes the minimum requirements that each Permittee must implement to engage Permittee staff and contractors, and members of the public as part of its Storm Water Management Program. Under previous permits issued by the Central Valley Water Board, MS4 Permittees have been required to implement training and public education programs which are now well established. For the most part, the training and public education program requirements in **Attachments J and K** have been reduced to a set of requirements that are specifically included in the federal regulations under 40 CFR 122.26(d)(2)(iv)(A)(6), 122.26(d)(2)(B)(6) and 122.26(d)(2)(D)(4)¹²³, which should already be incorporated into each Permittee's existing training and public education programs. Each Permittee is expected to utilize the information and data collected from the monitoring and assessments conducted within the Jurisdictional Runoff Area, and from its tracking inventories, maps, and inspections to best direct its training and public education program resources toward addressing the highest priority water quality conditions identified within their Storm Water Management Plans.

According to 40 CFR 122.26(d)(2)(iv), public participation is required to be included as part of the "*comprehensive planning process*", which includes the development and implementation of the Storm Water Management Plans and Storm Water Management Programs. The requirements under **Attachments J and K** specify the opportunities that the public must be provided to be involved in the "*comprehensive planning process*", as required by 40 CFR 122.26(d)(2)(iv).

¹²³ See 40 CFR 122.34(b)(1) and (2) for Phase II MS4 Public Education and Outreach on Storm Water Impacts and Public Involvement/Participation Program.

7. Planning and Land Development/Post Construction Storm Water Management Program

As described under **Attachments J and K**, each Permittee is required to use its land use and planning authority to implement a development planning program to control and reduce the discharge of pollutants in storm water from new development and significant redevelopment to the MEP. Proper implementation of the Planning and Land Development program will also contribute toward effectively prohibiting non-storm water discharges from development projects to the MS4. Pursuant to 40 CFR 122.26(d)(2)(iv)¹²⁴, each Permittee is required to implement a *“management program...to reduce the discharge of pollutants to the MEP using management practices, control techniques and system, design and engineering methods, and other such provisions where applicable.”* As part of the management program, 40 CFR 122.26(d)(2)(iv)(A)(2) requires *“planning procedures including a comprehensive master plan to develop, implement and enforce controls to reduce the discharge of pollutants from municipal storm sewers which receive discharges from areas of new development and significant redevelopment.”*

Development typically includes the construction of impervious surfaces such as sidewalks, driveways, roads, and rooftops. These impervious surfaces generate and concentrate pollutants (such as pesticides, petroleum hydrocarbons, heavy metals, and pathogens) that are otherwise not found in high concentrations in the natural environment. Pollutants that accumulate on impervious surfaces are not easily biodegraded or not subject to natural treatment processes. When it rains, these pollutants can be transported in storm water runoff from these impervious surfaces into receiving waters, resulting in poor water quality and degradation of beneficial uses. The California Department of Pesticide Regulation completed an urban surface water monitoring program in northern California in 2010 collecting water and sediment samples in urban creeks located in the Sacramento and San Francisco Bay areas. This study indicated that “ninety-five percent of the water samples contained at least one pesticide, but multiple detections were common.”¹²⁵

In addition to the generation of pollutants, development can alter the natural conditions of the land by removing vegetative cover, reducing the perviousness of the surface, and reducing the capacity of storm water that can be intercepted, captured, stored, infiltrated, evaporated, and/or evapotranspired. The alteration of the natural conditions and addition of

¹²⁴ See 40 CFR 122.34(b)(5) for Phase II MS4 Post Construction Storm Water Management in New Development and Redevelopment Program.

¹²⁵ Monitoring Urban Pesticide Runoff in Northern California, 2009-2010, [Report 264, California Department of Pesticide Regulation, July 2011](https://www.waterboards.ca.gov/waterrights/water_issues/programs/bay_delta/docs/cmnt081712/sldmwa/ensmingerandkelley201.pdf).
(https://www.waterboards.ca.gov/waterrights/water_issues/programs/bay_delta/docs/cmnt081712/sldmwa/ensmingerandkelley201.pdf)

impervious surfaces associated with development causes water quality problems. Hydrograph modification, or hydromodification, is the change in the natural watershed hydrologic processes and runoff characteristics caused by development or other land use changes that result in increased stream flows, altered sediment transport, and morphological changes to channels receiving the runoff.

This is consistent with what USEPA has noted, that “[m]ost stormwater runoff is the result of the man-made hydrologic modifications that normally accompany development. The addition of impervious surfaces, soil compaction, and tree and vegetation removal result in alterations to the movement of water through the environment. As interception, evapotranspiration, and infiltration are reduced and precipitation is converted to overland flow, these modifications affect not only the characteristics of the developed site but also the watershed in which the development is located. Stormwater has been identified as one of the leading sources of pollution for all water body types in the United States. Furthermore, the impacts of stormwater pollution are not static; they usually increase with more development and urbanization.”¹²⁶

Reducing the impact from the increased pollutant loads and flows generated by impervious surfaces added to a watershed is essential to protecting and restoring the integrity of the receiving waters. **Attachments J and K** include the minimum “*management practices, control techniques and system, design and engineering methods, and other such provisions where applicable*” to be included in the “*planning procedures...to reduce the discharge of pollutants...from areas of new development and significant redevelopment.*” The Planning and Land Development requirements of **Attachments J and K** will achieve multiple goals, for example 1) minimize the generation and discharge of pollutants in storm water from the MS4, and 2) minimize the potential of storm water discharges from causing altered flow regimes and excessive downstream erosion in receiving waters.

Control Measures for New and Redevelopment Projects

Attachments J and K are based on the requirements of previous permits approved by the Central Valley Water Board. **Attachments J and K** have been modified to allow the more integrated, holistic, and long-term planning approach of the Storm Water Management Program to be incorporated into the Permittee’s development planning. The result will be greater pollutant removal from storm water runoff, and improvements in the functionality and hydrologic regimes of the subwatersheds located in and downstream of the Permittee’s Jurisdictional Runoff Area. Specific components addressed in the Planning and Land Development/Post Construction Storm Water

¹²⁶Reducing Stormwater Costs through Low Impact Development (LID) Strategies and Practices, USEPA, December 2007.

Management Program include defined criteria for Priority Development Projects, source and treatment control measures, numeric sizing criteria, erosion control and sediment management, maintenance agreement and transfers, low impact development, hydromodification management practices, coordination, enforcement and tracking, and the implementation of best management practices to promote infiltration. Mitigation funding, regional storm water mitigation and alternatives to onsite low impact development and hydromodification measures options are also described.

Incorporating an integrated, holistic and long-term planning approach into each Permittee's Planning and Land Development program is essential to reducing the impact of development on receiving waters. Development projects that convert natural open space areas into urbanized areas result in the generation and discharge of pollutants associated with anthropogenic activities and significant modifications to the hydrologic flow regimes. Both can adversely affect the chemical, physical, and biological conditions of receiving waters. Redevelopment projects, on the other hand, are opportunities to reduce the generation of pollutants and restore more natural hydrologic flow regimes in areas of industrial, commercial, and municipal operations, which can contribute toward restoring or rehabilitating the chemical, physical, and biological conditions of impacted and/or impaired receiving waters.

To improve the health and functionality of the receiving waters within the Central Valley region, planning and land use practices must change to reduce the various impacts due to hydromodification, and pollutants associated with storm water runoff from developing and developed areas. Planning principles to preserve enhance and restore the functionality and hydrologic regimes were incorporated into the development planning provisions of all previous permit terms within the Central Valley region. **Attachments J and K** of this Order focus on mitigating the effects of development by continuing to include these principles, as well as promoting the concept of utilizing storm water as a resource. By doing so, pollutants in storm water runoff generated within developing and developed areas will be treated more naturally, and storm water will be discharged to receiving waters at discharge rates that are not unnaturally erosive, thereby resulting in conditions that are more supportive of healthy and sustainable water bodies.

For development projects identified as Priority Development Projects, the requirements of **Attachments J and K** are the "*management practices, control techniques and system, design and engineering methods, and other such provisions where applicable*" to be included in the "*planning procedures...to reduce the discharge of pollutants...from areas of new development and significant redevelopment.*" **Attachments J and K** describe the performance criteria for the BMPs that must be implemented for each Priority Development Project.

Attachments J and K emphasize preserving natural watershed hydrology by requiring retention of storm water and management of flows to maintain or mimic the natural hydrology of a site or delineated drainage area. The holistic and long-term planning approach of the Storm Water Management Plans is incorporated into **Attachments J and K** by encouraging the Permittee to improve or rehabilitate watershed functionality and flow regimes with a combination of strategies.

Attachments J and K describe the storm water pollutant control BMP requirements that must be implemented by all Priority Development Projects. The purpose of **Attachments J and K** is to reduce pollutants in storm water runoff to the MEP from Priority Development Projects before discharging to the MS4. Of all the available treatment processes available, retention of storm water, and therefore capture of the pollutants in the storm water, will achieve 100 percent pollutant removal efficiency for the volume of storm water retained. No other method of treatment can achieve 100 percent pollutant removal efficiency. Thus, retention of as much storm water onsite as possible is the most effective way to reduce pollutants in storm water discharges to and from the MS4, and controls pollutants in storm water discharges from a site to the MEP.

Under **Attachments J and K**, retention of the 85th percentile storm event is the default design standard that Priority Development Projects must use to implement to mimic the pre-development retention volume ("design capture volume"). Since the 85th percentile storm event has previously been used as the numeric design standard for treatment control BMPs, the same size storm event has been applied as the numeric design standard for the storm water pollutant control BMP requirements. This is consistent with previous permit requirements approved by the Central Valley Water Board.

The 85th percentile storm event is the event that has a precipitation total greater than or equal to 85 percent of all storm events over a given period of record in a specific area or location. For example, to determine what the 85th percentile storm event is in a specific location, all 24-hour storms that have recorded values over a 30 year period would be tabulated and a 85th percentile storm would be determined from this record (i.e., 15 percent of the storms would be greater than the number determined to be the 85th percentile storm). Most jurisdictions in the Central Valley Region have already developed isopluvial maps that can provide this type of information. The 85th percentile storm might be determined to be a number such as 1.0 inch, and this would be multiplied by the total area of the project footprint to calculate the design capture volume. The Priority Development Project designer would then select a system of BMPs that would retain (i.e. intercept, infiltrate, store, evaporate, evapotranspire, or harvest and use) the design capture volume, based on the 85th percentile storm event onsite.

Retention of all storm water and all pollutants in storm water onsite for the 85th percentile storm event, however, may not always mimic the natural pre-development retention volume. Retention of the volume generated by the 85th percentile storm event also may not be practical, nor desirable, as storm water flows are a necessary component of the natural hydrologic processes in a watershed.

The optimum amount of storm water retained onsite, or regionally, would mimic the pre-development retention volume of the project site. Mimicking the pre-development retention volume is an approach USEPA allows for federal development projects. USEPA issued guidance on implementing storm water runoff requirements for federal projects that require the retention of the 95th percentile storm event as the default design standard to mimic the pre-development hydrology of a project site.¹²⁷ The USEPA guidance also provided an option to develop a site-specific design standard. Similar to the USEPA guidance for federal facilities, **Attachments J and K** provide an option to develop a site-specific design capture volume that would mimic the pre-development retention volume of the project site.

Retention BMPs will be designed to capture a specific volume and may take some time for the intercepted or captured storm water to infiltrate, evaporate, evapotranspire, or be used. Retention of the design capture volume, however, will capture and retain a significant portion of the pollutants generated and accumulated on a Priority Development Project. In a recent study performed by SCCWRP, they found *“that the magnitude of constituent load associated with storm water runoff depends, at least in part, on the amount of time available for pollutant build-up on land surfaces. The extended dry period that typically occurs in arid climates such as southern California maximizes the time for constituents to build-up on land surfaces, resulting in proportionally higher concentrations and loads during initial storms of the season.”*¹²⁸ This implies that the “first flush” of a rainy season and the first storm events after long antecedent dry periods tend to have the highest pollutant loads. Capturing and retaining the pollutant loads of the “first flush” of a rainy season and the first storm events after long antecedent dry periods will reduce a significant portion of the pollutants in storm water discharged to and from the MS4.

The Central Valley Water Board, however, acknowledges that in some situations retaining the design capture volume fully onsite may not be technically feasible, may be cost prohibitive, or may not provide any overall

¹²⁷USEPA, 2009. Technical Guidance on Implementing the Storm Water Runoff Requirements for Federal Projects under section 438 of the Energy Independence and Security Act, EPA 841-B-09-001. December 2009.

¹²⁸ Stein, E.D., Tiefenthaler, L.L., and Schiff, K.C., 2007. Technical Report 510, Sources, Patterns and Mechanisms of Storm Water Pollutant Loading from Watershed and Land Uses of the Greater Los Angeles Area, California, USA. March 20, 2007.

water quality benefits to the water bodies located within the Jurisdictional Runoff Area. If the design capture volume is not retained onsite because the Priority Development Project is allowed to implement alternative compliance options, the pollutants in the portion of the design capture volume not reliably retained onsite must still be reduced to the MEP. Thus, flow through conventional treatment control BMPs are required to be implemented, where needed, on Priority Development Projects in addition to the retention BMPs and/or biofiltration BMPs.

Where the purpose of the Planning and Land Development requirements under **Attachments J and K** is to reduce pollutants in storm water runoff to the MEP, the purpose of the requirements under **Attachments J and K** is to maintain or restore more natural hydrologic flow regimes to prevent increased, unnatural erosion in downstream receiving waters to the MEP. **Attachments J and K** describe hydromodification management BMP requirements that must be implemented by all Priority Development Projects.

The Planning and Land Development requirements under previous permits approved by the Central Valley Water Board required the Permittee to address hydromodification design concepts in Development Standard Manual. The performance criteria for the implementation of structural BMPs on Priority Development Projects described in this Order are consistent with the requirements in previous permits. At a minimum, the Permittee must update their Development Standards Manual to incorporate structural BMP requirements of **Attachments J and K**.

8. Low Impact Development and Hydromodification

The requirements of **Attachments J and K** are the minimum “*management practices, control techniques and system, design and engineering methods, and other such provisions where applicable*” to be included in the “*planning procedures...to reduce the discharge of pollutants...from areas of new development and significant redevelopment*” applicable to all development projects. These requirements are based on and consistent with the requirements for new and redevelopment projects in previous permits issued by the Central Valley Water Board. New and redevelopment projects are required to implement source and treatment control BMPs that will minimize the generation of pollutants. Additionally, each new and redevelopment project must implement, where applicable and feasible, low impact development best management practices (LID BMPs), infiltration BMPs and hydromodification to mimic the natural hydrology of the site and retain and/or treat pollutants in storm water runoff prior to discharging to and from the MS4. The Order requires each Permittee to develop or update and implement Low Impact Development criteria and Hydromodification Management Plans and develop and maintain a Technical Guidance manual of development standards, including source, treatment, and infiltration controls, LID, hydromodification, and erosion and sediment control strategies consistent with the Low Impact Development and Hydromodification Management Plans.

The Permittee must submit Low Impact Development criteria, Hydromodification Plan, and schedule for the development, modification, and implementation of the Technical Manual with its SWMP.

The LID Center defines LID as “*a comprehensive land planning and engineering design approach with a goal of maintaining and enhancing the pre-development hydrologic regime of urban and developing watersheds.*”¹²⁹ LID designs seek to control storm water at the source, using small-scale integrated site design and management practices to mimic the natural hydrology of a site, retain storm water runoff by minimizing soil compaction and impervious surfaces, and disconnect storm water runoff from conveyances to the storm drain system.

LID BMPs may utilize interception, storage, evaporation, evapotranspiration, infiltration, and filtration processes to retain and/or treat pollutants in storm water before it is discharged from a site so long as the processes or devices will not adversely impact groundwater quality. Because of these numerous options, the Central Valley Water Board expects that every development project will be able to implement some form of LID BMPs. Examples of LID BMPs include using permeable pavements, rain gardens, rain barrels, grassy swales, soil amendments, native plants, and other manufactured systems that provide onsite treatment and retention of storm water runoff.

Attachments J and K also include requirements for all development projects to, where feasible, landscape with native and/or low water use plants to minimize the discharge of non-storm water discharges associated with excessive irrigation, as well as harvest (i.e., storage) and use precipitation to promote the concept of utilizing storm water as a resource.

Only Priority Development Projects are subject to the Planning and Land Development requirements of **Attachments J and K**, which provide size thresholds and/or fit under specific use categories. Priority Development Projects are required to incorporate specific performance criteria for structural BMPs incorporated into the project plan to reduce the generation of pollutants and address potential impacts from hydromodification.

The Priority Development Project categories are based on the requirements of the Third Permit Term for the Permittee. Priority Development Projects generally include new development and significant redevelopment projects that can generate large amounts of pollutants or have large areas of impervious surface that will contribute to adverse impacts in receiving waters. Placement of impervious surfaces within the environment not only generates and accumulates significant amounts of pollutants that will be transported in

¹²⁹ www.lowimpactdevelopment.org

storm water runoff, but also drastically modifies the natural hydrologic processes within the watersheds.

Impervious surfaces do not allow natural infiltration and treatment of storm water runoff to take place. Instead, storm water runoff from impervious surfaces have typically been directed through pipes, curbs, gutters, and other hardscape into receiving waters, with little treatment at significantly increased volumes and accelerated flow rates over what would occur naturally. The increased pollutant loads, storm water volume, discharge rates and velocities, and discharge durations discharged from the MS4 adversely impact the flora and fauna of receiving waters, and causes increased, unnatural erosion and scouring within creek bed and banks. Placement of impervious surfaces also encapsulates “good” sediment (such as sand, gravel, rocks and cobbles) that would normally replenish creek beds and banks to help stabilize them.

Attachments J and K contain requirements for Permittees to minimize the adverse effects of hydromodification on water quality. “Hydromodification,” as the term is used in this Permit, refers to ecologically significant modification of a watershed’s natural hydrograph, characterized by increased volume, velocity, rate, duration, and/or overall energy (collectively, “flow”). Hydromodification typically results from new land development that increases impervious surfaces, thereby increasing the flow of storm water runoff into the MS4 and receiving waters during peak storm events. Controls that minimize hydromodification impacts typically are designed to capture storm water runoff during peak storm events and control its release into receiving waters in a manner that approximates how the natural hydrograph would have responded to such a storm. Hydromodification controls are especially important when low-impact development (LID) measures fail to perform due to improper design, installation or maintenance.

Left uncontrolled, hydromodification has the potential to increase the discharge of pollutants into waters of the United States in at least two ways. First, significantly increasing the flow of storm water runoff is associated with increased sedimentation of receiving waters, whether such sediment originates from lands surrounding the receiving water or from the bed/bank of the receiving water itself.¹³⁰ Second, the sediment roiled by increased storm water flows can mobilize other pollutants that absorb or adsorb to sediment, thereby facilitating their deposition into waters of the United States. Such

¹³⁰ Higher intensity flows can loosen sediment within the MS4’s Jurisdictional Runoff Area and cause the MS4 to discharge the sediment into waters of the United States. Additionally, higher intensity flows from an MS4 can loosen sediment that had settled in the bed and/or banks of waters of the United States, and which would have remained settled if not for increased flows from the MS4. In this manner, higher intensity flows from an MS4 can discharge sediment into waters of the United States even when the sediment is not physically present in the MS4’s effluent.

eroded sediment and sediment-bound pollutants often have adverse impacts to the quality of waters of the United States, sensitive habitat, and/or aquatic or terrestrial organisms. Significant changes to the preexisting hydrograph can also disrupt natural drainage patterns in ways that cause significant increases in water temperatures in stream segments. These and similar changes can set off further water quality impacts such as excessive nutrient loads and corresponding drops in dissolved oxygen. This explanation is intended as an illustrative, but not exhaustive list of the ways that hydromodification can lead to the discharge of pollutants into waters of the United States.

The connection between significant increases in flow and the discharge of pollutants finds additional support in precedential State Water Board orders. For example, in the 2000 State Water Board order *In re Bellflower* (the “SUSMPs Order”), the board considered a challenge to the Los Angeles Regional Water Board’s inclusion of numeric design criteria to manage the volume of Permittee’s urban storm water runoff. The State Water Board made the following observation regarding new development controls:

*[The controls] are aimed at limiting not just the pollutants in the runoff from the new development, but also the volume of runoff that enters the [MS4]. By limiting runoff from new development, the [controls] prevent increased impacts from urban runoff generally. There is adequate technical information in the record to show that by controlling the volume of runoff from new development, BMPs can be effective in reducing the discharge of pollutants in storm water runoff.*¹³¹

The State Water Board reiterated this concept in 2001, stating, “The Regional Water Board is appropriately concerned not only with pollutants in runoff but also the volume of runoff, since the volume of runoff can affect the discharge of pollutants.”¹³²

The well-established connection between higher intensity flows and the discharge of pollutants puts this Region-wide Permit’s hydromodification requirements squarely within the mandates of the CWA. Section 402(p) of the Act provides that MS4 permits

... shall require controls to reduce the discharge of pollutants to the maximum extent practicable, including management practices, control techniques and system, design and engineering methods, and such other

¹³¹ State Water Board Order WQ 2000-11, at p. 5 (emphasis added).

¹³² State Water Board Order WQ 2001-15, at p. 12, fn. 23.

*provisions as the [US EPA] Administrator or the State determines appropriate for the control of such pollutants.*¹³³

The hydromodification requirements in this Order fall within the MEP standard because they (1) are designed to effectively address pollutants of concern, (2) are technically feasible, and (3) will achieve benefits that bear a reasonable relationship to the cost of implementation. To the extent any of the hydromodification requirements in this Order may go beyond the MEP standard, their inclusion in the Order represents the Central Valley Water Board's judgment that they are necessary and appropriate for the control of pollutants, as supported by the studies referenced in this Fact Sheet.

This increased and unnatural erosion, which is caused by both altered storm water flow and altered sediment flow regimes, is largely responsible for degradation of creeks, streams, and associated habitats in the Central Valley region. In an ongoing study by the Stormwater Monitoring Coalition to assess the health of streams throughout Southern California, researchers found that three of the four highest risk stressors to creeks (percent sands and fines present, channel alteration, and riparian disturbance) were related to physical habitat.¹³⁴ Researchers studying flood frequencies in Riverside County have found that increases in watershed imperviousness of only 9-22 percent can result in increases in peak flow rates for the two-year storm event of up to 100 percent.¹³⁵ Such changes in runoff have significant impacts on channel morphology.

In addition, a technical report issued by the Southern California Coastal Water Research Project (SCCWRP) stated that "*[r]ecent studies indicate that California's intermittent and ephemeral streams are more susceptible to the effects of hydromodification than streams from other parts of the United States. Physical degradation of stream channels in the central and eastern United States can initially be detected when watershed impervious cover approaches 10 percent, although biological effects (which may be more difficult to detect) may occur at lower levels. In contrast, initial response of streams in the semi-arid portions of California appears to occur between 3 and 5 percent impervious cover.*"¹³⁶ These studies highlight the extent to which impacts originating from impervious surfaces created by development

¹³³ 33 USC section 1342(p)(3)(B)(iii).

¹³⁴ Assessing the Health of Southern California Streams, Stormwater Monitoring Coalition, Fact Sheet

¹³⁵ Schueler and Holland, 2000. Storm Water Strategies for Arid and Semi-Arid Watersheds (Article 66). *The Practice of Watershed Protection*.

¹³⁶ Stein, E. and Zaleski, S., 2005. Technical Report 475, Managing Runoff to Protect Natural Streams: The Latest Development on Investigation and Management of Hydromodification in California. December 30, 2005.

are responsible for the degradation and hydromodification of creeks and streams.

Attachments J and K, however, do allow exemptions from hydromodification requirements for development project types that meet certain conditions. Exempted projects do not need to apply the hydromodification control criteria. The exemptions have been provided as an incentive for the Permittee to encourage and promote the implementation of LID design concepts and green infrastructure and building principles. Development projects that meet the exemption conditions are not expected to be cost prohibitive and also expected to be protective of water quality.

This Order also establishes hydromodification control criteria to protection natural drainage systems. Hydromodification control criteria are numeric storm water management objectives applied to non-exempted new and redevelopment projects to meet pre-project hydrology in natural drainage systems. The purpose of the hydrologic controls is to minimize changes in post-project hydrologic storm water runoff discharge rates, velocities, and duration. This must be achieved by maintaining the project's pre-project storm water runoff flow rates and durations. Control criteria include demonstrating storm water runoff is retained onsite or the Erosion Potential (Ep) in the receiving water channel will approximate 1, as determined by the equation provided in **Attachment I** (*Determination of Erosion Potential*). The Permittee must demonstrate that post-project conditions are expected to approximate the pre-project erosive effect of sediment transporting flows in receiving waters. The hydromodification control criteria must lead to the incorporation of project design features intended to approximate, to the extent feasible, an Ep value of 1 to demonstrate that the project design features will be protective of the natural drainage systems from erosion, incision, and sedimentation that can occur as a result of flow increases from impervious surfaces and damage stream habitat in natural drainage systems. Control criteria are applied differently to projects disturbing between one (1) and fifty (50) acres, which are presumed to meet pre-project hydrology and projects disturbing over fifty (50) acres.

Attachments J and K require that post-project flow rates and durations mimic the *pre-project* condition consistent with those requirements under previous permits. This includes assuming artificially hardened channels receiving storm water discharges from a Priority Development Project have the characteristics of a natural stream segment similar to that found in the watershed.

Attachments J and K require hydromodification management BMPs to compensate for sediment loss in cases where the development would cause loss of sediment supply as a result of the project. Maintaining the pre-project flows and durations from a Priority Development Project will significantly reduce the potential for increased erosion caused by development. Loss of

natural sediment because pervious areas covered by the impervious surfaces on the Priority Development Project, however, can still cause increased, unnatural erosion in receiving waters. Runoff that is discharged from a Priority Development Project that lacks sediment becomes “sediment hungry” and can result in increased erosion upstream and downstream from the point of discharge.

9. Alternative Compliance Options

This Order provides an option for a Permittee to identify and compile a list of candidate projects that could potentially be used as alternative compliance options for Priority Development Projects. A Permittee may allow alternative compliance in instances where it determines that offsite measures will have a greater overall water quality benefit than if the Priority Development Project were to implement structural BMPs onsite. Such projects include, for example, opportunities for stream or riparian area rehabilitation, opportunities for retrofitting existing infrastructure to incorporate storm water retention or treatment, and opportunities for regional BMPs, among others. Once these candidate projects are identified, Permittees may allow Priority Development Projects to fund, partially fund, or completely implement these candidate projects. The Permittee must first find that implementing such a candidate project would provide greater overall benefit to the watershed than requiring implementation of the structural BMPs onsite and also enter into a voluntary agreement with the Priority Development Project that authorizes this arrangement.

Other options allow the Permittee to propose a mitigation funding framework, regional storm water mitigation program, an in-lieu fee structure, or water quality credit system. A Permittee may choose to propose a mitigation management framework to support regional or sub-regional solutions to storm water pollution, or regional storm water mitigation program to substitute the development standard requirements required to be included in the Technical Guidance manual. An in-lieu fee structure or water quality credit system options are innovative pathways for Permittees to regulate their land development programs by allowing alternative compliance on each and every Priority Development Project. The Permittee may use an alternative compliance program to reach their stated goals of the Storm Water Management Program by using Priority Development Projects to either fund or implement projects that will provide water quality benefit and/or as an alternative to requiring strict adherence to the structural BMP design standards.

The Central Valley Water Board understands, however, that undertaking any of these approaches involves extensive planning, could be resource intensive for a Permittee. Therefore, the alternative compliance programs are optional and not a requirement of this Order.

10. Retrofitting and Rehabilitating Areas of Existing Development

This Order encourages the Permittee to identify areas of existing development (e.g., industrial, commercial, municipal, residential) as candidates for retrofitting, and streams, channels, and/or habitats as candidates for rehabilitation. The requirements have been incorporated into this Order to be more focused on utilizing these types of projects for addressing the highest priority water quality conditions identified in the Permittee's SWMP. Interest and opportunity to retrofit areas of existing development and rehabilitate channels located in areas of existing development have been observed in several programs the Central Valley Water Board oversees (e.g., CWA Section 401 Water Quality Certification program, supplemental environmental projects, and grant programs). For example, each jurisdiction has miles and miles of streets that could be retrofitted to become green streets. Reshaping landscaped areas from convex to concave configurations can detain storm water instead of directing runoff as quickly as possible to the MS4. Retrofit projects could also include simply replacing impervious surfaces with permeable surfaces.

Retrofitting projects do not necessarily have to be expensive. Retrofitting projects could be as simple as redirecting downspouts from roofs to pervious or landscaped areas instead of to hardscaped areas discharging directly to the MS4, providing rain barrels to harvest storm water from downspouts for use at a later time, or planting more trees in areas with little vegetation to provide canopy that can intercept storm water. The Central Valley Water Board encourages the Permittee to identify simple, low-cost retrofitting opportunities that can be easily implemented, in addition to other more expensive retrofitting and channel rehabilitation projects.

Rehabilitation of channels, streams, and/or habitat will require more significant planning and resources to implement. There are, however, also abundant opportunities to rehabilitate channels, streams and/or habitats in or adjacent to areas of existing development. Each Jurisdictional Runoff Area likely has several creeks, and stream reaches that have been undergrounded, artificially hardened, or hydromodified that could be rehabilitated to be more sustainably configured, which would slow down storm water flows and potentially have more assimilative capacity for pollutants while still being supportive of designated beneficial uses.

The Central Valley Water Board recognizes that it may be infeasible to implement retrofitting or channel rehabilitation projects within certain areas of a Permittee's jurisdiction. For such areas, the Permittee is encouraged to instead identify, develop, and implement regional retrofitting and channel rehabilitation projects (i.e. projects that can retain and/or treat storm water from one or more areas of existing development) adjacent to and/or downstream of the areas of existing development.

This Order encourages the development and implementation of retrofitting and rehabilitation projects, so that a Permittee can develop a program with strategies to facilitate the implementation of these types of projects in areas of existing development. The strategies are expected to include allowing and encouraging Priority Development Projects to implement retrofitting types of projects as a means of compliance with the structural BMP performance criteria requirements.

C. Implementation

Part V.F.4 describes requirements for the Permittee to implement a Storm Water Management Program as described in an approved SWMP. The Permittee must continue implementation of their current SWMP until that SWMP has either been: a) deemed to meet the intent of this Order, or b) has been modified to be consistent with this Order. Once the SWMP has been approved by the Central Valley Water Board, the Permittee shall implement the new, approved SWMP and corresponding Work Plan, consistent with the schedule developed as a part of this Order. Annual Reports must include proposed SWMP modifications based on results implementing the Permittee's Storm Water Management Program. The SWMP, with modifications, revisions, or amendments as approved by the Central Valley Water Board, is an enforceable component of this Order.

1. Effectiveness Assessment and Reporting

Part V.F.5 describes the effectiveness assessment and reporting requirements of this Order. The Permittee must develop and implement an effectiveness assessment approach to track the short- and long-term effectiveness of its Storm Water Management Program in addressing the PWQCs. The effectiveness assessment approach will assist the Permittee in adaptively managing its Storm Water Management Program and making necessary modifications to the program in order to address the PWQCs, achieve the MEP standard for storm water discharges from its MS4, and protect water quality. The short and long-term effectiveness assessment approach must be described in the SWMP by the Permittee. An effectiveness assessment evaluates receiving waters, MS4 discharges, storm water pollutant discharge reductions, Water Quality Based Plans and Special Studies, and program elements. The results of the effectiveness assessments will be provided in the Mid-Term Report (short term effectiveness assessment) and End Term Report (long-term effectiveness assessment). As described in USEPA's guidance on effectiveness assessments, the purposes of a program evaluation include:

- a. Meeting regulatory requirements;
- b. Documenting progress toward water quality milestones;
- c. Justifying commitment of resources;
- d. Providing feedback to the management program; and
- e. Assessing reductions in pollutants of concerns.

Part V.G describes the reporting requirements under this Order. The purpose of this provision is to determine and document compliance with the requirements set forth in this Order. The goal of reporting is to communicate to the Central Valley Water Board and the people of the State the implementation status of each Storm Water Management Program and compliance with the requirements of this Order. This goal is to be accomplished through the submittal of specific deliverables to the Central Valley Water Board by the Permittee. Annual Reports must include several components to meet the requirements in 40 CFR 122.24(c); all reports must meet the requirements contained in **Attachment H (Standard Permit Provisions and General Provisions)** and of this Order. The Permittee is also required to submit a completed certification statement in accordance with the signatory requirements in **Attachment H (Standard Permit Provisions and General Provisions)**.

2. Storm Water Management Plans

The Permittee shall develop/revise and submit a SWMP to the Central Valley Water Board for approval. The SWMP, including the RAA, shall be submitted in accordance with the timelines outlined in **Part V.G.2** of the Order.

3. Trash Implementation Plans

A Permittee who selects to implement Track 2 of the Trash Provisions must submit a Trash Implementation Plan (TIP). A Permittee need not resubmit a previously submitted a TIP. If the Permittee chooses to implement a Trash Capture Credits Program, the Permittee shall submit a TIP modification request in accordance with **Attachment N1.E**. Upon implementation of the modification, the TIP shall be amended and submitted with the next Trash Implementation Annual Report.

4. Pyrethroid Control Program

A Pyrethroid Management Plan required by the 13 July 2020 *Order to Submit Technical and Monitoring Reports Pursuant to California Water Code Sections 13267 and 13383* may be submitted with the SWMP.

5. Annual Cost Reports

The Permittee shall submit an Annual Cost Report via the MS4 Cost Data Portal that complies with the State Water Board's *Water Quality Control Policy to Standardize Cost Reporting in Municipal Stormwater Permits*, adopted 22 January 2025.

6. Work Plans

The Permittee must develop a five (5) year Work Plan to be submitted in conjunction with the SWMP. The Work Plan serves as the Permittee's schedule for implementing their SWMP. The Work Plan must contain a detailed implementation schedule that covers all of the tasks outlined in the SWMP. Proposed modifications to the Work Plan may be submitted during

the Annual Reporting process. The Work Plan and modifications to the Work Plan are subject to the Executive Officer's review and approval. If the Executive Officer has not objected within ninety (90) days of the Work Plan submission, the Permittee must implement the Work Plan and modifications.

7. Annual Reports

The Permittee must submit an Annual Report for each reporting period no later than **15 November** of each permit year. The annual reporting period consists of the reporting period of July 1 through June 30 of the previous fiscal year.

The Annual Report shall include a certification that the Storm Water Management Program and Work Plan were implemented as proposed/approved, a discussion of proposed compliance with the SWMP and Work Plan for the forthcoming year, and any proposed minor modifications to the Storm Water Management Program, or any proposed Work Plan modifications.

8. Mid-Term and End-Term Reports

The Permittee must develop and submit Mid-term and End-Term Reports to the Central Valley Water Board. The Mid-Term Report shall be submitted by **15 November** within three (3) years from the date of the NOA issued under Order R5-2016-0040 or three (3) years after the last End-Term Report, whichever is sooner, and the End-Term Report shall be submitted by **15 November** within five (5) years from the date of the NOA issued under Order R5-2016-0040 or five (5) years after the last End-Term Report, whichever is sooner. The Mid-Term and End-Term Reports shall serve as the Annual Report for the years submitted.

Once a SWMP is approved, the Mid-Term and End-Term Reports reporting cycle shall reset so that the Mid-Term and End-Term Reports shall be submitted by **15 November** three and five years, respectively, from the year the SWMP is approved.

The Mid-Term and End-Term Reports shall include a cumulative summary of Storm Water Management Program activities; status of compliance with SWMP milestones, strategies, and activities, or if SWMP milestones, strategies, and activities were not met, justifications to revise the SWMP; a fiscal analysis; a cumulative summary of the monitoring data; all physical, chemical, and biological monitoring data collected to date; data analytical results and recommendations to modify the Monitoring Study Design and Implementation Schedule, Water Quality Based Plans and Special Studies; and/or Quality Assurance/Quality Control Plan.

The Mid-Term Report shall include a short-term Storm Water Management Program effectiveness assessment. The End-Term Report shall include a long-term Storm Water Management effectiveness assessment.

9. Adaptive Management and Modification

The last step in the storm water management framework is adaptive management and modification. **Part V.F.6** describes the iterative approach and adaptive management process. The Permittee must implement an adaptive management approach and modify the SWMP and Work Plan so that the Storm Water Management Program is effective over the long-term. The adaptive management process fulfills the requirements in **Part V.C.5** to address exceedances of receiving water limitations. As applicable, the Permittee must evaluate the results of each effectiveness assessment and determine if significant progress is being made and/or if the identified milestones are being achieved. The adaptive management approach shall be described in the Permittee's SWMP. Specifically, the Permittee must develop and implement an adaptive management approach that addresses the following:

- a. Progress towards achieving improved water quality in receiving water and MS4 discharges, and receiving water limitations based on the Effectiveness Assessment (**Part V.F.5**);
- b. Achievement of water quality milestones, including providing quantifiable reductions in pollutant concentrations and loads in MS4 discharges over time;
- c. Re-evaluation of the water quality priorities based on newly identified sources and/or more recent monitoring data for discharges from the MS4 and the receiving water(s), and the effectiveness of implemented pollutant controls;
- d. Compliance with water quality objectives or standards and if beneficial uses are being met; and
- e. Availability of new information and data from sources other than the Permittee's monitoring program(s) that informs the effectiveness of the actions implemented by the Permittees.

Based on the results of the adaptive management process, the Permittee must report any modification necessary to improve the effectiveness of the Storm Water Management Program, including modifications to final dates for attainment with water quality standards (except for those compliance deadlines established in a TMDL), or the need for a compliance schedule (**Part III.B.3**). The Permittee shall identify modifications to the Storm Water Management Program, including monitoring modifications to be revised in the Permittee's SWMP.

The Permittee must implement any minor modifications to the Storm Water Management Plan upon approval by the Executive Officer or within ninety (90) days of submittal if the Executive Officer expresses no objections.

D. Standard Permit Provisions and General Provisions

Standard Provisions, which apply to all NPDES permits in accordance with 40 CFR section 122.41, and additional conditions applicable to specified categories of permits in accordance with 40 CFR section 122.42, are provided in **Attachment H** (*Standard Permit Provisions and General Provisions*). Dischargers must comply with all standard provisions and with those additional conditions that are applicable under 40 CFR section 122.42.

These provisions are based on 40 CFR sections 122.44, 122.62, 122.63, 122.64, 124.5, 125.62, and 125.64, and are also consistent with requirements included in previous permit issued by the Central Valley Water Board. The Central Valley Water Board may reopen the permit to modify permit conditions and requirements, as well as revoke, reissue, or terminate in accordance with federal regulations. Causes for such actions include, but are not limited to, endangerment to human health or the environment; acquisition of newly-obtained information that would have justified the application of different conditions if known at the time of Order adoption; to incorporate provisions as a result of new federal or state laws, regulations, plans, or policies (including TMDLs and other Basin Plan amendments); modification in toxicity requirements; violation of any term or condition in this Order; and/or minor modifications to correct typographical errors or require more frequent monitoring or reporting by a Permittee. The Order also includes additional causes including: approval or revised TMDL, where the revisions warrant a change to the provisions of this Order, the Central Valley Water Board may modify this Order consistent with the assumptions and requirements of the revised WLA(s), including the program of implementation; in consideration of any State Water Board action regarding the precedential language of State Water Board Order WQ 99-05; and to include provisions or modifications to WQBELs in **Attachment G** (*Specific Provision for Total Maximum Daily Loads Applicable to Order R5-2026-0XXXX*) in this Order prior to the final compliance deadlines, if practicable, that would allow an action-based, BMP compliance demonstration approach with regard to final WQBELs for storm water discharges based on the Central Valley Water Board's evaluation of whether Storm Water Management Programs in **Part V.F** of the Order have resulted in attainment of interim WQBELs for storm water and review of relevant research, including but not limited to data and information provided by Permittees and other stakeholders, on storm water quality and the efficacy and reliability of control technologies.

This Order may be reopened for modification to revise the aquatic toxicity provisions if the Supreme Court determines that the test of significant toxicity cannot be used in NPDES permits and the State Water Board suspends or revises the aquatic toxicity water quality standards.

F8.PUBLIC PARTICIPATION

The Central Valley Water Board released a proposed draft of this Order to stakeholders on 19 June 2024 and 2 April 2026. The Central Valley Water Board

staff also discussed the permit renewal with USEPA staff, State Water Board staff, and Tribal governments who expressed interest.

To comply with Assembly Bill 2108 and consistent with Water Code section 189.7, the Central Valley Water Board conducted outreach to disadvantaged and tribal communities that may be affected by the Order.

Prior to the Board's consideration of this Order, on **XX June 2026**, the Central Valley Water Board notified the Permittees and all interested agencies and persons of its intent to hold a hearing to issue a Region-wide NPDES permit for discharges from the Central Valley Water Board's MS4s and provided them with an opportunity to submit written comments on the Tentative Order over a 30-day period. The procedures followed for submission of written comments are described in the Notice of Public Hearing and Tentative Order transmittal documents published for this Order. Notification was provided through the Central Valley Water Board's website and the Central Valley Water Board's e-mail subscription service.

The Central Valley Water Board held a public hearing on the Tentative Order during its regular Board meeting on **XX August 2026**. Permittees and interested persons were invited to attend. At the public hearing, the Central Valley Water Board heard testimony and comments pertinent to the discharge and this Order. The hearing procedures followed by the Central Valley Water Board are described in the Notice of Public Hearing published for this Order.

**ATTACHMENT G – Specific Provisions for Total Maximum Daily Loads (TMDLs)
Applicable to Order R5-2026-0XXX**

Central Valley Water Board approved TMDLs where storm water and/or urban runoff are listed as a source.

Attachment G identifies all MS4 Permittees that are subject to the specified TMDLs. However, only those Permittees that are enrolled under this Permit are subject to the requirements included in **Attachment G**.

G1. Lower San Joaquin River Diazinon and Chlorpyrifos TMDL

Permittees: City of Patterson and San Joaquin County

Applicable Water Body:

- Lower San Joaquin River from Mendota Dam to Vernalis

Water Quality Based Effluent Limitations (WQBELs): Permittees identified in **Section G1** shall implement BMPs that will attain the applicable WLAs by the Final Compliance Deadline and maintain applicable WLAs thereafter.

Waste Load Allocations (WLAs)

The waste load allocations for NPDES permitted municipal storm water Permittees identified in **Section G1** shall not exceed the sum (S) of one (1) as defined below:

$$S = \frac{C_D}{WQO_D} + \frac{C_C}{WQO_C} \leq 1.0$$

where,

C_D = diazinon concentration in ug/L of point source discharge

C_C = chlorpyrifos concentration in ug/L of point source discharge

WQO_D = acute or chronic diazinon water quality criterion (0.16 and 0.10 ug/L, respectively). Not to be exceeded more than once in a three-year period.

WQO_C = acute or chronic chlorpyrifos water quality criterion (0.025 and 0.145 ug/L, respectively). Not to be exceeded more than once in a three-year period.

For the purpose of calculating the sum (S) above, non-detectable concentrations are considered to be zero. In determining compliance with permit requirements related to attainment of these waste load allocations, the Central Valley Water Board will consider data or information submitted by the Permittees identified in **Section G1** regarding diazinon and chlorpyrifos inputs from sources that are

outside the jurisdiction of the permitted discharge, and any applicable provisions in the Permittee's NPDES permit requiring the Permittee to reduce the discharge of pollutants to the maximum extent practicable.

Deadline for Attainment of Waste Load Allocations (WLAs):

- 1 December 2010 ("Final Compliance Deadline")

TMDL Attainment:

As part of the 2020-2022 California Integrated Report, Diazinon and Chlorpyrifos were considered by the State Water Board for removal from the CWA section 303(d) List. The data and information available indicated that there is sufficient justification for removing the Lower San Joaquin River (San Joaquin River from Mendota Dam to Vernalis) water segment - pollutant combination from the CWA section 303(d) List. On 11 May 2022, USEPA approved the State Water Board's 2020-2022 California Integrated Report. As such, the applicable waterbody identified in **G1** was delisted for diazinon and chlorpyrifos.

Due to the delistings, the applicable waterbody identified in **G1** is not subject to **G1.A.** (TMDL Implementation Requirements) as long as monitoring data continues to confirm the delisting status. Permittees must carry out a monitoring and reporting program consistent with the **G1.B.** (TMDL Monitoring Requirements) to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.

If, in the future, monitoring data supports a 303(d) re-listing of the Lower San Joaquin River waterbody for Diazinon and Chlorpyrifos waterbody-pollutant combination, the Central Valley Water Board Executive Officer may direct the Permittees in **G1** to conduct additional actions as described below.

TMDL Implementation, Monitoring and Reporting Requirements, and Demonstration of Compliance

A. TMDL Implementation Requirements

1. If directed by the Central Valley Water Board, Permittees identified in **Section G1** shall implement best management practices to address diazinon and chlorpyrifos in municipal storm water discharges. This will be implemented through compliance with the following sections of the Order:
 - a. Discharge Prohibitions, **Part II**; and
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements), as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;

- iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);
 - iv. Program Elements – Planning and Land Development/Post Construction Storm Water Management Program
2. If directed by the Central Valley Water Board, the Permittees identified in **Section G1** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP and through **Part V.F.6** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.
3. Pesticide Management Plan: If directed by the Central Valley Water Board, Permittees identified in **G1** shall prepare, as part of the SWMP, a Pesticide Management Plan which includes a description of actions that will be taken to reduce diazinon and chlorpyrifos discharges to meet the applicable allocations. Pesticide Management Plan provisions addressing diazinon and chlorpyrifos can be included in the pesticide management plans covering current use pesticides with the goal of reducing the discharge of pesticides from municipal storm water to receiving water. The Pesticide Management Plan shall address the Permittee's own use of pesticides, and to the extent authorized by law, the use of such pesticides by other sources within their jurisdictions. The Pesticide Management Plan shall include identifying and promoting, within the context of integrated pest management (IPM) programs, the use of pest management practices that minimize the risk of pesticide impacts on surface water quality resulting from urban runoff discharges. Additionally, the plan shall include the integration of IPM into the Permittee's municipal operations and be promoted to residents, businesses, and public agencies within each Permittee's jurisdiction through public outreach.

The Central Valley Water Board Executive Officer may require revisions to the Pesticide Management Plan if the Central Valley Water Board Executive Officer determines that the Pesticide Management Plan is not likely to attain the waste load allocations. The Pesticide Management Plan may be submitted by individual Permittee or Permittee groups and may refer to actions required by other agencies or actions required elsewhere in this Order. The Pesticide Management Plan may include actions to reduce MS4 pesticide discharges through participation or support of a regional or statewide pesticide reduction program. To receive credit toward compliance for such participation, the Permittees must demonstrate that they have participated in the implementation of the program (i.e., contributing materially and in proportion in the size of a Permittee's service area, including, but not limited to, implementation of reduction program measures, membership, contribution of resources, etc.). Examples of programs that could be eligible include Our Water Our World (outreach), a recognized regional monitoring program, and California Stormwater Quality Association's (CASQA) pesticide regulatory initiative. In developing the monitoring and reporting programs for the Permittee, the

Central Valley Water Board will, in coordination with the DPR, assist the Permittee in identifying diazinon and chlorpyrifos alternatives for which monitoring may be necessary.

B. TMDL Monitoring Requirements

1. Permittees shall carry out a monitoring and reporting program to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.
2. With Central Valley Water Board Executive Officer approval, the Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by this section.
3. Permittees that implement individual water quality monitoring pursuant to **Section G1.B.1**, must submit a Monitoring Plan and Quality Assurance Project Plan (QAPP) as part of the Monitoring Study Design and Implementation Schedule (**Attachment J - J25.B** or **Attachment K – K8.B**, as applicable).
 - a. Monitoring Plan – at a minimum, the Monitoring Plan must include the following information:
 - i. Management questions to be answered by the Monitoring Plan,
 - ii. Constituents to be monitored, analytical methods, and reporting limits,
 - iii. Sampling site(s) locations, including latitude and longitude coordinates, water body name and water body segment if applicable,
 - iv. Other monitoring efforts that will provide supplemental data for the local water quality monitoring program and assessment (if any),
 - v. Proposed schedule and level of detail for monitoring reports. If a more comprehensive report is necessary every few years, the Monitoring Plan shall propose a schedule and description of the level of detail (consistent with the information described below) that will be included within the Mid-Term and End-Term Reports.
 - b. Quality Assurance Project Plan (QAPP) shall be consistent with Surface Water Ambient Monitoring Program (SWAMP). All samples shall be collected and analyzed according to the QAPP.

C. TMDL Reporting Requirements

1. If directed by the Central Valley Water Board the Permittees identified in **Section G1** shall document in Mid-Term and End-Term Reports the implementation of BMPs to control the discharge of diazinon and chlorpyrifos in their urban discharge.

2. If directed by the Central Valley Water Board the Permittees identified in **Section G1** shall complete and submit program effectiveness assessments in their Mid-Term and End-Term Reports as specified in **Part V.G.8** of the Order that includes assessment of the effectiveness of the BMPs implemented to control the discharge of diazinon and chlorpyrifos in their urban discharge.
3. Monitoring Reports shall be submitted with the Mid-Term and End-Term Reports and include the following information (consistent with the approved Monitoring Plan):
 - a. The purpose of the monitoring, brief contextual background, and a brief description of the study design and rationale;
 - b. Methods used for sample collection: list methods used for sample collection, sample or data collection identification, collection date, and media if applicable;
 - c. Identification of and rationale for any deviations from the QAPP;
 - d. Results of data collection, including concentration detected, measurement units, reporting limits, and detection limits, if applicable;
 - e. Quantifiable assessment, analysis and interpretation of data for each monitoring parameter;
 - f. Comparison to reference sites (if applicable), guidelines or targets;
 - g. Discussion of whether data collected addresses the objective(s) or question(s) of study design; and
 - h. Quantifiable discussion of program/study pollutant reduction effectiveness.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV**, and the water quality-based effluent limitations established for applicable WLAs for diazinon and chlorpyrifos in **G1** shall be demonstrated by any one of the following methods:
 - a. Prior to Final Compliance Deadline: Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of diazinon and chlorpyrifos that are capable of achieving compliance with applicable WLAs.
 - b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable diazinon and chlorpyrifos WLAs.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonably

demonstrates attainment of applicable WLAs in the Applicable Water Bodies.

- d. Attainment of applicable WLAs within the discharge.
- e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G2. Sacramento San Joaquin River Diazinon and Chlorpyrifos TMDL

Permittees:

- Phase I MS4s (City of Sacramento, City of Stockton, County of San Joaquin, Port of Stockton, City of Antioch, City of Brentwood, City of Oakley, Contra Costa County, Contra Costa Flood Control and Water Conservation District); and
- Phase II MS4s (City of Lathrop, City of Lodi, City of Manteca, City of Rio Vista, City of Tracy, City of West Sacramento, and County of San Joaquin)

Applicable Water Body:

- Sacramento-San Joaquin Delta Waterways

Water Quality Based Effluent Limitations (WQBELs):

Permittees identified in **Section G2** shall implement BMPs that will attain the applicable WLAs by the Final Compliance Deadline and maintain applicable WLAs thereafter.

Waste Load Allocations (WLAs):

The waste load allocations for NPDES permitted municipal storm water Permittees identified in **Section G2** shall not exceed the sum (S) of one (1) as defined below:

$$S = \frac{C_D}{WQO_D} + \frac{C_C}{WQO_C} \leq 1.0$$

where,

C_D = diazinon concentration in ug/L of point source discharge

C_C = chlorpyrifos concentration in ug/L of point source discharge

WQO_D = acute or chronic diazinon water quality criterion (0.16 and 0.10 ug/L, respectively). Not to be exceeded more than once in a three-year period.

WQO_C = acute or chronic chlorpyrifos water quality criterion (0.025 and 0.145 ug/L, respectively). Not to be exceeded more than once in a three-year period.

For the purpose of calculating the sum (S) above, non-detectable concentrations are considered to be zero. In determining compliance with permit requirements related to attainment of these waste load allocations, the Central Valley Water Board will consider data or information submitted by the Permittees identified in **Section G2** regarding diazinon and chlorpyrifos inputs from sources that are outside the jurisdiction of the permitted discharge, and any applicable provisions in the Permittee's

NPDES permit requiring the Permittee to reduce the discharge of pollutants to the maximum extent practicable.

Deadline for Attainment of Waste Load Allocations (WLAs):

- 1 December 2011 (“Final Compliance Deadline”)

TMDL Attainment:

As part of the 2020-2022 California Integrated Report, Diazinon and Chlorpyrifos were considered by the State Water Board for removal from the CWA section 303(d) List. The data and information available indicated that there is sufficient justification for removing the Sacramento-San Joaquin Delta Waterways water segment - pollutant combination from the CWA section 303(d) List. On 11 May 2022, USEPA approved the State Water Board’s 2020-2022 California Integrated Report. As such, the applicable waterbody identified in **G2** was delisted for diazinon and chlorpyrifos.

Due to the delistings, the applicable waterbody identified in **G2** is not subject to **G2.A.** (TMDL Implementation Requirements) as long as monitoring data continues to confirm the delisting status. Permittees must carry out a monitoring and reporting program consistent with the **G2.B.** (TMDL Monitoring Requirements) to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.

If, in the future, monitoring data supports a 303(d) re-listing of the Sacramento-San Joaquin Delta Waterways for diazinon and chlorpyrifos waterbody-pollutant combination, the Central Valley Water Board Executive Officer may direct the Permittees in **G2** to conduct additional actions as described below.

TMDL Implementation, Monitoring and Reporting Requirements, and Demonstration of Compliance

A. TMDL Implementation Requirements

1. If directed by the Central Valley Water Board, the Permittees identified in **Section G2** shall implement best management practices to address diazinon and chlorpyrifos in municipal storm water discharges. This will be implemented through compliance with the following sections of the Order:
 - a. Discharge Prohibitions, **Part II**; and
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements) as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;
 - iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);

iv. Program Elements – Planning and Land Development/Post
Construction Storm Water Management Program

2. If directed by the Central Valley Water Board, the Permittees identified in **Section G2** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP and through **Part V.F.6** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.
3. Pesticide Management Plan: If directed by the Central Valley Water Board, Permittees identified in **G2** shall prepare, as part of the SWMP, a Pesticide Management Plan which includes a description of actions that will be taken to reduce diazinon and chlorpyrifos discharges to meet the applicable allocations. Pesticide Management Plan provisions addressing diazinon and chlorpyrifos can be included in the pesticide management plans covering current use pesticides with the goal of reducing the discharge of pesticides from municipal storm water to receiving water. The Pesticide Management Plan shall address the Permittee's own use of pesticides, and to the extent authorized by law, the use of such pesticides by other sources within their jurisdictions. The Pesticide Management Plan shall include identifying and promoting, within the context of integrated pest management (IPM) programs, the use of pest management practices that minimize the risk of pesticide impacts on surface water quality resulting from urban runoff discharges. Additionally, the plan shall include the integration of IPM into the Permittee's municipal operations and be promoted to residents, businesses, and public agencies within each Permittee's jurisdiction through public outreach.

The Central Valley Water Board Executive Officer may require revisions to the Pesticide Management Plan if the Central Valley Water Board Executive Officer determines that the Pesticide Management Plan is not likely to attain the waste load allocations. The Pesticide Management Plan may be submitted by individual Permittee or Permittee groups and may refer to actions required by other agencies or actions required elsewhere in this Order. The Pesticide Management Plan may include actions to reduce MS4 pesticide discharges through participation or support of a regional or statewide pesticide reduction program. To receive credit toward compliance for such participation, the Permittees must demonstrate that they have participated in the implementation of the program (i.e., contributing materially and in proportion in the size of a Permittee's service area, including, but not limited to, implementation of reduction program measures, membership, contribution of resources, etc.). Examples of programs that could be eligible include Our Water Our World (outreach), a recognized regional monitoring program, and California Stormwater Quality Association's (CASQA) pesticide regulatory initiative. In developing the monitoring and reporting programs for the Permittee, the Central Valley Water Board will, in coordination with the DPR, assist the

Permittee in identifying diazinon and chlorpyrifos alternatives for which monitoring may be necessary.

B. TMDL Monitoring Requirements

1. Permittees shall carry out a monitoring and reporting program to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.
2. With Central Valley Water Board Executive Officer approval, the Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by this section.
3. Permittees that implement individual water quality monitoring pursuant to **Section G2.B.1**, must submit a Monitoring Plan and Quality Assurance Project Plan (QAPP) as part of the Monitoring Study Design and Implementation Schedule (**Attachment J - J25.B** or **Attachment K – K8.B**, as applicable) to the Central Valley Water Board Executive officer for review and approval. The Monitoring Plan and QAPP may be submitted individually or as part of a comprehensive Monitoring Study Design.
 - a. Monitoring Plan – at a minimum, the Monitoring Plan must include the following information:
 - i. Management questions to be answered by the Monitoring Plan,
 - ii. Constituents to be monitored, analytical methods, and reporting limits,
 - iii. Sampling site(s) locations, including latitude and longitude coordinates, water body name and water body segment if applicable,
 - iv. Other monitoring efforts that will provide supplemental data for the local water quality monitoring program and assessment (if any),
 - v. Proposed schedule and level of detail for monitoring reports. If a more comprehensive report is necessary every few years, the Monitoring Plan shall propose a schedule and description of the level of detail (consistent with the information described below) that will be included within the Mid-Term and End Term Reports.
 - b. Quality Assurance Project Plan (QAPP) shall be consistent with Surface Water Ambient Monitoring Program (SWAMP). All samples shall be collected and analyzed according to the QAPP.

C. TMDL Reporting Requirements

1. If directed by the Central Valley Water Board, the Permittees identified in **Section G2** shall document in Mid-Term and End-Term Reports the implementation of BMPs to control the discharge of diazinon and chlorpyrifos in their urban discharge.
2. If directed by the Central Valley Water Board, the Permittees identified in **Section G2** shall complete and submit program effectiveness assessments in their Mid-Term and End-Term Reports as specified in **Part V.G.8** of the Order that includes assessment of the effectiveness of the BMPs implemented to control the discharge of diazinon and chlorpyrifos in their urban discharge.
3. Monitoring Reports submitted with the Mid-Term and End-Term Reports shall include the following information (consistent with the approved Monitoring Plan):
 - a. The purpose of the monitoring, brief contextual background, and a brief description of the study design and rationale;
 - b. Methods used for sample collection: list methods used for sample collection, sample or data collection identification, collection date, and media if applicable;
 - c. Identification of and rationale for any deviations from the QAPP;
 - d. Results of data collection, including concentration detected, measurement units, reporting limits, and detection limits, if applicable;
 - e. Quantifiable assessment, analysis and interpretation of data for each monitoring parameter;
 - f. Comparison to reference sites (if applicable), guidelines or targets;
 - g. Discussion of whether data collected addresses the objective(s) or question(s) of study design; and
 - h. Quantifiable discussion of program/study pollutant reduction effectiveness.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV** and the water quality-based effluent limitations established for applicable WLAs for diazinon and chlorpyrifos in **G2** shall be demonstrated by any one of the following methods:
 - a. Prior to Final Compliance Deadline: Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of diazinon and chlorpyrifos that are capable of achieving compliance with applicable WLAs.

- b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable diazinon and chlorpyrifos WLAs.
- c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonable demonstrates attainment of applicable WLAs in the Applicable Water Bodies.
- d. Attainment of applicable WLAs within the discharge.
- e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G3. TMDL for Diazinon and Chlorpyrifos in the Sacramento and Feather Rivers

Permittees: City of Anderson, County of Colusa, City of Marysville, City of Red Bluff, City of Redding, County of Shasta, County of Sutter, City of Yuba City, County of Yuba

Applicable Water Bodies:

- Sacramento River from Shasta Dam to I Street Bridge
- Feather River from Fish Barrier Dam to Sacramento River

Water Quality Based Effluent Limitations (WQBELs): Permittees identified in **Section G3** shall implement BMPs that will attain the applicable WLAs by the Final Compliance Deadline and maintain applicable WLAs thereafter.

Waste Load Allocations (WLAs)

The waste load allocations for NPDES permitted municipal storm water Permittees identified in **Section G3** shall not exceed the sum (S) of one (1) as defined below:

$$S = \frac{C_D}{WQO_D} + \frac{C_C}{WQO_C} \leq 1.0$$

where,

C_D = diazinon concentration in ug/L of point source discharge

C_C = chlorpyrifos concentration in ug/L of point source discharge

WQO_D = acute or chronic diazinon water quality criterion (0.016 and 0.10 ug/L, respectively). Not to be exceeded more than once in a three-year period.

WQO_C = acute or chronic chlorpyrifos water quality criterion (0.025 and 0.145 ug/L, respectively). Not to be exceeded more than once in a three-year period.

For the purpose of calculating the sum (S) above, non-detectable concentrations are considered to be zero. In determining compliance with permit requirements related to attainment of these waste load allocations, the Central Valley Water Board will consider data or information submitted by the Permittees identified in **Section G3** regarding diazinon and chlorpyrifos inputs from sources that are outside the jurisdiction of the permitted discharge, and any applicable provisions in the Permittee's NPDES permit requiring the Permittee to reduce the discharge of pollutants to the maximum extent practicable.

Deadline for Attainment of Waste Load Allocations (WLAs):

- 1 December 2011 (“Final Compliance Deadline”)

TMDL Attainment:

As part of the 2020-2022 California Integrated Report, Diazinon and Chlorpyrifos were considered by the State Water Board for removal from the CWA section 303(d) List. The data and information available indicated that there is sufficient justification for removing the Sacramento River (from Shasta Dam to I Street Bridge; Feather River from Fish Barrier Dam to Sacramento River) water segment - pollutant combination from the CWA section 303(d) List. On 11 May 2022, USEPA approved the State Water Board’s 2020-2022 California Integrated Report. As such, the applicable waterbody identified in **G3** was delisted for diazinon and chlorpyrifos.

Due to the delistings, the applicable waterbodies identified in **G3** are not subject to **G3.A.** (TMDL Implementation Requirements) as long as monitoring data continues to confirm the delisting status. Permittees must carry out a monitoring and reporting program consistent with the **G3.B.** (TMDL Monitoring Requirements) below to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.

If, in the future, monitoring data supports 303(d) re-listing of the Sacramento River for diazinon and chlorpyrifos waterbody-pollutant combination, the Central Valley Water Board Executive Officer may direct the Permittees in **G3** to conduct additional actions as described below.

TMDL Implementation, Monitoring and Reporting Requirements, and Demonstration of Compliance

A. TMDL Implementation Requirements

1. If required by the Central Valley Water Board, the Permittees identified in **Section G3** shall implement best management practices to address diazinon and chlorpyrifos in municipal storm water discharges. This will be implemented through compliance with the following sections of the Order:
 - a. Discharge Prohibitions, **Part II**; and
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements) as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;
 - iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);

- iv. Program Elements – Planning and Land Development/Post Construction Storm Water Management Program
2. If directed by the Central Valley Water Board, the Permittees identified in **Section G3** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP and through **Part V.F.6** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.
3. Pesticide Management Plan: If directed by the Central Valley Water Board, Permittees identified in **G3** shall prepare, as part of the SWMP, a Pesticide Management Plan which includes a description of actions that will be taken to reduce diazinon and chlorpyrifos discharges to meet the applicable allocations. Pesticide Management Plan provisions addressing diazinon and chlorpyrifos can be included in the pesticide management plans covering current use pesticides with the goal of reducing the discharge of pesticides from municipal storm water to receiving water. The Pesticide Management Plan shall address the Permittee's own use of pesticides, and to the extent authorized by law, the use of such pesticides by other sources within their jurisdictions. The Pesticide Management Plan shall include identifying and promoting, within the context of integrated pest management (IPM) programs, the use of pest management practices that minimize the risk of pesticide impacts on surface water quality resulting from urban runoff discharges. Additionally, the plan shall include the integration of IPM into the Permittee's municipal operations and be promoted to residents, businesses, and public agencies within each Permittee's jurisdiction through public outreach.

The Central Valley Water Board Executive Officer may require revisions to the Pesticide Management Plan if the Central Valley Water Board Executive Officer determines that the Pesticide Management Plan is not likely to attain the waste load allocations. The Pesticide Management Plan may be submitted by individual Permittee or Permittee groups and may refer to actions required by other agencies or actions required elsewhere in this Order. The Pesticide Management Plan may include actions to reduce MS4 pesticide discharges through participation or support of a regional or statewide pesticide reduction program. To receive credit toward compliance for such participation, the Permittees must demonstrate that they have participated in the implementation of the program (i.e., contributing materially and in proportion in the size of a Permittee's service area, including, but not limited to, implementation of reduction program measures, membership, contribution of resources, etc.). Examples of programs that could be eligible include Our Water Our World (outreach), a recognized regional monitoring program, and California Stormwater Quality Association's (CASQA) pesticide regulatory initiative. In developing the monitoring and reporting programs for the Permittee, the Central Valley Water Board will, in coordination with the DPR,

assist the Permittee in identifying diazinon and chlorpyrifos alternatives for which monitoring may be necessary.

B. TMDL Monitoring Requirements

1. Permittees shall carry out a monitoring and reporting program to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.
2. With Central Valley Water Board Executive Officer approval, the Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by this section.
3. Permittees that implement individual water quality monitoring pursuant to **Section G3.B.1**, must submit a Monitoring Plan and Quality Assurance Project Plan (QAPP) as part of the Monitoring Study Design and Implementation Schedule (**Attachment J - J25.B** or **Attachment K – K8.B**, as applicable).
 - a. Monitoring Plan – at a minimum, the Monitoring Plan must include the following information:
 - i. Management questions to be answered by the Monitoring Plan,
 - ii. Constituents to be monitored, analytical methods, and reporting limits,
 - iii. Sampling site(s) locations, including latitude and longitude coordinates, water body name and water body segment if applicable,
 - iv. Other monitoring efforts that will provide supplemental data for the local water quality monitoring program and assessment (if any),
 - v. Proposed schedule and level of detail for monitoring reports. If a more comprehensive report is necessary every few years, the Monitoring Plan shall propose a schedule and description of the level of detail (consistent with the information described below) that will be included within the Mid-Term and End-Term Reports.
 - b. Quality Assurance Project Plan (QAPP) shall be consistent with Surface Water Ambient Monitoring Program (SWAMP). All samples shall be collected and analyzed according to the QAPP.

C. TMDL Reporting Requirements

1. If directed by the Central Valley Water Board, the Permittees identified in **Section G3** shall document in Mid-Term and End-Term Reports the implementation of BMPs to control the discharge of diazinon and chlorpyrifos in their urban discharge.

2. If directed by the Central Valley Water Board, the Permittees identified in **Section G3** shall complete and submit program effectiveness assessments in their Mid-Term and End-Term Reports as specified in **Part V.G.8** of the Order that includes assessment of the effectiveness of the BMPs implemented to control the discharge of diazinon and chlorpyrifos in their urban discharge.
3. Monitoring Reports shall be submitted with the Mid-Term and End-Term Reports and include the following information (consistent with the approved Monitoring Plan):
 - a. The purpose of the monitoring, brief contextual background, and a brief description of the study design and rationale;
 - b. Methods used for sample collection: list methods used for sample collection, sample or data collection identification, collection date, and media if applicable;
 - c. Identification of and rationale for any deviations from the QAPP;
 - d. Results of data collection, including concentration detected, measurement units, reporting limits, and detection limits, if applicable;
 - e. Quantifiable assessment, analysis and interpretation of data for each monitoring parameter;
 - f. Comparison to reference sites (if applicable), guidelines or targets;
 - g. Discussion of whether data collected addresses the objective(s) or question(s) of study design; and
 - h. Quantifiable discussion of program/study pollutant reduction effectiveness.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water limitations in **Part IV** and the water quality-based effluent limitations for applicable WLAs for diazinon and chlorpyrifos in **G3** shall be demonstrated by any one of the following methods:
 - a. Prior to Final Compliance Deadline: Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of diazinon and chlorpyrifos that are capable of achieving compliance with applicable WLAs.
 - b. Timely implementation of a Central Valley Water Board approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable diazinon and chlorpyrifos WLAs.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonably

demonstrates attainment of applicable WLAs in the Applicable Water Bodies.

- d. Attainment of applicable WLAs within the discharge.
- e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G4. Sacramento County Urban Creeks Diazinon and Chlorpyrifos TMDL

Permittees: County of Sacramento and Cities of Citrus Heights, Elk Grove, Rancho Cordova, and Sacramento

Applicable Water Bodies:

- Arcade Creek
- Elder Creek
- Elk Grove Creek
- Morrison Creek
- Chicken Ranch Slough
- Strong Ranch Slough

Water Quality Based Effluent Limitations (WQBELs): Permittees identified in **Section G5** shall implement BMPs that will attain the applicable WLAs by the Final Compliance Deadline and maintain applicable WLAs thereafter.

Waste Load Allocations (WLAs):

The waste load allocations for NPDES permitted municipal storm water Permittees identified in **Section G4** shall not exceed the sum (S) of one (1) as defined below:

$$S = \frac{C_D}{WQO_D} + \frac{C_C}{WQO_C} \leq 1.0$$

where,

C_D = diazinon concentration in ug/L of point source discharge

C_C = chlorpyrifos concentration in ug/L of point source discharge

WQO_D = acute or chronic diazinon water quality criterion (0.16 and 0.10 ug/L, respectively). Not to be exceeded more than once in a three-year period.

WQO_C = acute or chronic chlorpyrifos water quality criterion (0.025 and 0.145 ug/L, respectively). Not to be exceeded more than once in a three-year period.

For the purpose of calculating the sum (S) above, non-detectable concentrations are considered to be zero. In determining compliance with permit requirements related to attainment of these waste load allocations, the Central Valley Water Board will consider data or information submitted by the Permittees identified in **Section G4** regarding diazinon and chlorpyrifos inputs from sources that are outside the jurisdiction of the permitted discharge, and any applicable provisions in the Permittee's NPDES permit requiring the Permittee to reduce the discharge of pollutants to the maximum extent practicable.

Deadline for Attainment of Waste Load Allocations (WLAs):

- 1 December 2011 (“Final Compliance Deadline”)

TMDL Attainment:

As part of the 2020-2022 California Integrated Report, Diazinon and Chlorpyrifos were considered by the State Water Board for removal from the CWA section 303(d) List. The data and information available indicated that there is sufficient justification for removing the Sacramento Urban Creeks water segment - pollutant combination from the CWA section 303(d) List. On 11 May 2022, USEPA approved the State Water Board’s 2020-2022 California Integrated Report. As such, the applicable waterbody identified in **G5** was delisted for diazinon and chlorpyrifos.

Due to the delistings, the applicable water bodies identified in **G4** are not subject to **G4.A.** (TMDL Implementation Requirements) specific actions to address diazinon and chlorpyrifos as long as monitoring data continues to confirm the delisting status. Permittees must carry out a monitoring and reporting program consistent with the **G4.B.** (TMDL Monitoring Requirements) to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.

If, in the future, monitoring data supports 303(d) re-listing of the Sacramento River for diazinon and chlorpyrifos waterbody-pollutant combination, the Central Valley Water Board Executive Officer may direct the Permittees in **G4** to conduct additional actions as described below.

TMDL Implementation, Monitoring and Reporting Requirements, and Demonstration of Compliance

A. TMDL Implementation Requirements

1. If directed by the Central Valley Water Board, the Permittees identified in **Section G4** shall implement best management practices to address diazinon and chlorpyrifos in municipal storm water discharges. This will be implemented through compliance with the following sections of the Order:
 - a. Discharge Prohibitions, **Part II**; and
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements) as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;
 - iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);

iv. Program Elements – Planning and Land Development/Post
Construction Storm Water Management Program

2. If directed by the Central Valley Water Board, the Permittees identified in **Section G4** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP and through **Part V.F.6** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.
3. Pesticide Management Plan: If directed by the Central Valley Water Board, Permittees identified in **G4** shall prepare, as part of the SWMP, a Pesticide Management Plan which includes a description of actions that will be taken to reduce diazinon and chlorpyrifos discharges to meet the applicable allocations. Pesticide Management Plan provisions addressing diazinon and chlorpyrifos can be included in the pesticide management plans covering current use pesticides with the goal of reducing the discharge of pesticides from municipal storm water to receiving water. The Pesticide Management Plan shall address the Permittee's own use of pesticides, and to the extent authorized by law, the use of such pesticides by other sources within their jurisdictions. The Pesticide Management Plan shall include identifying and promoting, within the context of integrated pest management (IPM) programs, the use of pest management practices that minimize the risk of pesticide impacts on surface water quality resulting from urban runoff discharges. Additionally, the plan shall include the integration of IPM into the Permittee's municipal operations and be promoted to residents, businesses, and public agencies within each Permittee's jurisdiction through public outreach.

The Central Valley Water Board Executive Officer may require revisions to the Pesticide Management Plan if the Central Valley Water Board Executive Officer determines that the Pesticide Management Plan is not likely to attain the waste load allocations. The Pesticide Management Plan may be submitted by individual Permittee or Permittee groups and may refer to actions required by other agencies or actions required elsewhere in this Order. The Pesticide Management Plan may include actions to reduce MS4 pesticide discharges through participation or support of a regional or statewide pesticide reduction program. To receive credit toward compliance for such participation, the Permittees must demonstrate that they have participated in the implementation of the program (i.e., contributing materially and in proportion in the size of a Permittee's service area, including, but not limited to, implementation of reduction program measures, membership, contribution of resources, etc.). Examples of programs that could be eligible include Our Water Our World (outreach), a recognized regional monitoring program, and California Stormwater Quality Association's (CASQA) pesticide regulatory initiative. In developing the monitoring and reporting programs for the Permittee, the Central Valley Water Board will, in coordination with the DPR,

assist the Permittee in identifying diazinon and chlorpyrifos alternatives for which monitoring may be necessary.

B. TMDL Monitoring Requirements

1. Permittees shall carry out a monitoring and reporting program to confirm ongoing attainment of the water quality objectives for diazinon and chlorpyrifos.
2. With Central Valley Water Board Executive Officer approval, the Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by this section.
3. Permittees that implement individual water quality monitoring pursuant to **Section G4.B.2**, must submit a Monitoring Plan and Quality Assurance Project Plan (QAPP) as part of the Monitoring Study Design and Implementation Schedule (**Attachment J - J25.B** or **Attachment K – K8.B**, as applicable).
 - a. Monitoring Plan – at a minimum, the Monitoring Plan must include the following information:
 - i. Management questions to be answered by the Monitoring Plan,
 - ii. Constituents to be monitored, analytical methods, and reporting limits,
 - iii. Sampling site(s) locations, including latitude and longitude coordinates, water body name and water body segment if applicable,
 - iv. Other monitoring efforts that will provide supplemental data for the local water quality monitoring program and assessment (if any),
 - v. Proposed schedule and level of detail for monitoring reports. If a more comprehensive report is necessary every few years, the Monitoring Plan shall propose a schedule and description of the level of detail (consistent with the information described below) that will be included within the Mid-Term and End-Term Reports.
 - b. Quality Assurance Project Plan (QAPP) shall be consistent with Surface Water Ambient Monitoring Program (SWAMP). All samples shall be collected and analyzed according to the QAPP.

C. TMDL Reporting Requirements

1. If directed by the Central Valley Water Board, the Permittees identified in **Section G4** shall document in Mid-Term and End-Term Reports the implementation of BMPs to control the discharge of diazinon and chlorpyrifos in their urban discharge.

2. If directed by the Central Valley Water Board, the Permittees identified in **Section G4** shall complete and submit program effectiveness assessments in their Mid-Term and End-Term Reports as specified in **Part V.G.8** of the Order that includes assessment of the effectiveness of the BMPs implemented to control the discharge of diazinon and chlorpyrifos in their urban discharge.
3. Monitoring Reports shall be submitted with the Mid-Term and End-Term Reports and include the following information (consistent with the approved Monitoring Plan):
 - a. The purpose of the monitoring, brief contextual background, and a brief description of the study design and rationale;
 - b. Methods used for sample collection: list methods used for sample collection, sample or data collection identification, collection date, and media if applicable;
 - c. Identification of and rationale for any deviations from the QAPP;
 - d. Results of data collection, including concentration detected, measurement units, reporting limits, and detection limits, if applicable;
 - e. Quantifiable assessment, analysis and interpretation of data for each monitoring parameter;
 - f. Comparison to reference sites (if applicable), guidelines or targets;
 - g. Discussion of whether data collected addresses the objective(s) or question(s) of study design; and
 - h. Quantifiable discussion of program/study pollutant reduction effectiveness.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV** and the water quality-based effluent limitations established for applicable WLAs for diazinon and chlorpyrifos in **G4** shall be demonstrated by any one of the following methods:
 - a. Prior to Final Compliance Deadline: Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of diazinon and chlorpyrifos that are capable of achieving compliance with applicable WLAs.
 - b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable diazinon and chlorpyrifos WLAs.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonably

demonstrates attainment of applicable WLAs in the Applicable Water Bodies.

- d. Attainment of applicable WLAs within the discharge.
- e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G5. Lower San Joaquin River Dissolved Oxygen TMDL

Permittees

- Phase I MS4s (City of Stockton and County of San Joaquin (Stockton Urbanized Area) and Port of Stockton)
- Phase II MS4s (Cities of Atwater, Ceres, Escalon, Hughson, Lathrop, Livingston, Los Banos, Manteca, Merced, Newman, Oakdale, Patterson, Ripon, Riverbank, and Turlock and Counties of Merced, San Joaquin, and Stanislaus)

Applicable Water Body:

- Lower San Joaquin River (Stockton Deep Water Ship Channel)

TMDL Attainment:

On 7 June 2021 and 6 October 2021, the Central Valley Water Board issued letters that deemed the Phase II MS4 Permittees and Phase I MS4 Permittees, respectively (listed in **G5**), in attainment of the final waste load allocation for the Lower San Joaquin River Dissolved Oxygen TMDL. The attainment determination was conditioned on Permittees' continuing financial contributions or direct monitoring associated with the Delta Regional Monitoring Program, in lieu of individual monitoring for this TMDL. As stated in Order R5-2016-0040, the Port of Stockton is listed as a "Municipality" for this TMDL, but its municipal storm water discharges' contribution to oxygen demanding substances has been shown to be de minimis. It participates in the aerator operation and maintenance agreement on a voluntary basis. Descriptions of Port of Stockton activities that implement this TMDL therefore should not be construed as WQBELs or other permit requirements. The Port of Stockton is therefore deemed in compliance with the final WLAs.

With the funding and operation of the Dock 20 Aeration Facility (Aeration Facility) at the Port of Stockton, receiving water monitoring shows that dissolved oxygen levels consistently meet the dissolved oxygen water quality objectives set forth in the Central Valley Water Board's Water Quality Control Plan for the Sacramento River and San Joaquin River Basins (Basin Plan). Should operations of the Aeration Facility cease, its effectiveness be reduced, or the Basin Plan water quality objectives otherwise not be met, the Central Valley Water Board may require the Permittees to implement additional monitoring, reporting, and/or controls in addition to those identified in **G5.A**, **G5.B**, and **G5.C** to maintain permit compliance.

If, in the future, the operations of the Aeration Facility cease, its effectiveness reduced, or the Basin Plan objectives are not met, the Central Valley Water Board Executive Officer may direct the Permittees in **G6** that contribute oxygen demanding substances at levels more than a *de minimis* amount to conduct additional actions as described in **G5.A**, **G5.B**, **G5.C**, and **G5.D** below

Further monitoring and assessment reporting by the Permittees for the TMDL under **G5.B** and **G5.C** is not required at this time. Permittees must continue to implement existing and appropriate best management practices as identified in their SWMP to address causes and contributions to organic enrichment and low dissolved oxygen in municipal storm water discharges.

Water Quality Based Effluent Limitations (WQBELs): Permittees identified in **Section G5** shall implement BMPs as identified in their SWMP to control and abate the discharge of pollutants in storm water discharges to attain the applicable WLAs.

Waste Load Allocations (WLAs)

The Basin Plan Amendment establishing this TMDL set the initial waste load allocations for NPDES-permitted discharges of oxygen demanding substances and their precursors as the effluent limitations that were applicable on 28 January 2005. Waste load allocations and permit conditions for new or expanded point source discharges in the San Joaquin River Basin upstream of the Stockton Deep Water Ship Channel (SDWSC), including NPDES and storm water, are based on the discharger demonstrating that the discharge will have no reasonable potential to cause or contribute to a negative impact on the dissolved oxygen impairment in the SDWSC.

In lieu of numeric effluent limitations, this Order requires the implementation of BMPs identified in the Permittees' SWMP to control and abate the discharge of pollutants in storm water discharges.

Deadline for Attainment of Waste Load Allocations (WLAs):

31 December 2011 ("Final Compliance Deadline")

TMDL Implementation, Monitoring, and Reporting Requirements and Demonstration of Compliance

A. TMDL Implementation Requirements

1. If directed by the Central Valley Water Board, the Permittees identified in **Section G5** shall implement best management practices to control the discharge of oxygen demanding substances and precursors in the Permittee's urban discharge. This will be implemented through compliance with the following sections of this Order:
 - a. Discharge Prohibitions, **Part II**; and
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements) as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;

- iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);
 - iv. Program Elements – Planning and Land Development/Post Construction Storm Water Management Program
2. If directed by the Central Valley Water Board, the Permittees identified in **Section G5** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP and through **Part V.F.6** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.

B. TMDL Monitoring Requirements

1. If directed by the Central Valley Water Board, Permittees shall submit an updated Monitoring Design Study and Implementation Schedule with the SWMP.
2. The Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by this section, with Central Valley Water Board Executive Officer approval.
3. Monitoring and assessment information may come from the Permittees' monitoring efforts; monitoring programs conducted by State or federal agencies or collaborative watershed efforts; or from special studies that evaluate the effectiveness of management practices.

C. TMDL Reporting Requirements:

1. If directed by the Central Valley Water Board, the Permittees shall document in their Work Plan, Mid-Term, and End-Term Reports the implementation of BMPs to control the discharge of oxygen demanding substances and precursors in their urban discharge.
2. In measuring compliance with permit requirements related to attainment of these wasteload allocations, the Central Valley Water Board Executive Officer will give credit for control measures implemented after 12 July 2004.
3. If directed by the Central Valley Water Board, the Permittees shall use the information gained from **Part V.F.5** (Effectiveness Assessment) to improve their program and identify new best management practices or modifications of existing best management practices to ensure that they are meeting applicable wasteload allocations. The Program Effectiveness Assessment information may come from the Permittees' monitoring efforts; monitoring programs conducted by State or federal agencies or collaborative watershed efforts; or from special studies that evaluate the effectiveness of management practices.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV** and the water quality-based effluent limitations established for applicable WLAs for dissolved oxygen in **G5** shall be demonstrated by any one of the following methods:
 - a. Prior to Final Compliance Deadline: Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to control the discharge of oxygen demanding substances and precursors in the Permittee's urban discharge that are capable of achieving compliance with applicable WLAs.
 - b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable dissolved oxygen WLAs.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonable demonstrates attainment of applicable WLA.
 - d. Attainment of applicable WLAs within the discharge.
 - e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G6. Sacramento-San Joaquin Delta Methylmercury TMDL

Permittees:

Phase I MS4s - Port of: Stockton and Sacramento Area MS4 (Cities of Citrus Heights, Elk Grove, Folsom, Galt, Rancho Cordova, and Sacramento and County of Sacramento)

Phase II MS4s - Cities of Lathrop, Lodi, Rio Vista, Tracy, and West Sacramento, and Counties of San Joaquin and Yolo

Applicable Water Bodies:

- Sacramento-San Joaquin Delta listed in Appendix 43 of the Basin Plan – Table A43-1
- Yolo Bypass waterways listed in Appendix 43 of the Basin Plan – Table A43-1

Water Quality Based Effluent Limitations (WQBELs):

Permittees identified in **Section G6** shall implement BMPs that will attain the applicable WLAs by the Final Compliance Deadline and maintain such attainment thereafter.

Waste Load Allocations (WLAs):

The methylmercury waste load allocations are shown in **Table G6-1**¹³⁷ and apply to the permittees listed below unless the WLAs have been modified during Phase 1 review, in which case the modified WLAs adopted into the Basin Plan apply.

Table G6-1: Methylmercury Waste Load Allocations for Urban Runoff

Municipality	Waste Load Allocations, Methylmercury (grams/year)
City of Lathrop	0.097
City of Lodi	0.053
City of Rio Vista	0.0078
City of Tracy	0.65
City of West Sacramento (Sacramento)	0.36
City of West Sacramento (Yolo Bypass)	0.28
County of San Joaquin (Central Delta)	0.57

¹³⁷ From Water Quality Control Plan for the Sacramento-San Joaquin, Fifth Edition, Central Valley Regional Water Quality Control Board, Revised February 2019. Chapter 4 (Implementation). [Table 4-18](#) (MS4 Methylmercury (MeHg) Waste Load Allocations for Urban Runoff within each Delta Area). (https://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/sacsjr_201902.pdf)

Municipality	Waste Load Allocations, Methylmercury (grams/year)
County of San Joaquin	0.016
County of San Joaquin (Sacramento River)	0.11
County of San Joaquin (San Joaquin River)	0.79
County of Solano (Yolo Bypass subarea)	0.021
County of Solano (Sacramento River)	0.041
County of Yolo (Sacramento River subarea)	0.041
County of Yolo (Yolo Bypass subarea)	0.083
Port of Stockton (Central Delta subarea)	0.39
Port of Stockton (San Joaquin River)	0.0036
Sacramento Area MS4 (Sacramento River)	1.0
Stockton Area MS4 (Central Delta subarea)	3.6
Stockton Area MS4 (San Joaquin River)	0.18

Deadline for Attainment of Waste Load Allocations (WLAs):

Methylmercury waste load allocations for MS4 dischargers in the Delta and Yolo Bypass shall be met as soon as possible, but no later than 31 December 2030 (“Final Compliance Deadline”), unless the Central Valley Water Board modifies the Sacramento-San Joaquin Delta Methylmercury TMDL implementation schedule and Final Compliance Deadline.

TMDL Implementation, Monitoring, and Reporting Requirements and Demonstration of Compliance:

A. TMDL Implementation Requirements

1. Permittees identified in **Section G7** shall implement best management practices to control erosion and sediment discharges with the goal of reducing mercury discharges. This will be implemented through compliance with the following sections of the Order:
 - a. Discharge Prohibitions, **Part II**;
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements) as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;
 - iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);
 - iv. Program Elements – Planning and Land Development/Post Construction Storm Water Management Program;

- v. Water Quality Monitoring; and
 - c. Effectiveness Assessment, **Part V.F.5**
- 2. The Permittees identified in **Section G6** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP and through **Part V.F.7** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.
- 2. The Phase II Permittees identified in **Section G6** that are enrolled in this Order shall implement reasonable and feasible mercury and methylmercury management practices identified by the large MS4 permittees and other Delta Mercury Control Program studies. After attainment of WLAs are demonstrated, Permittees shall continue to implement reasonable, feasible controls, consistent with their existing permits and orders, needed to maintain compliance with the WLAs.

B. TMDL Monitoring Requirements

The following monitoring requirements apply after the Central Valley Water Board's review of Delta Mercury Control Program, (see the Delta Mercury Control Program in the Basin Plan) or as specified in updates to the Delta Mercury Control Program following Phase 1 review:

- 1. Methylmercury Monitoring
 - a. Within one year following completion of the Delta Mercury Control Program Phase 1 review, the Permittees shall submit a monitoring plan and Quality Assurance and Project Plan (QAPP), for Central Valley Water Board Executive Officer approval, describing the locations and frequency of methylmercury monitoring. The monitoring plan shall include sampling locations and frequencies representative of the MS4 service area. The sampling locations, frequencies, and reporting may be the same as the requirements in this Order. The Permittees shall implement the monitoring plan within six months of Central Valley Water Board Executive Officer approval. The Permittees shall begin monitoring methylmercury loads and concentrations in storm water discharges to assess attainment with the TMDL allocations.
 - b. With Central Valley Water Board Executive Officer approval, the Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the ambient monitoring requirements required by the Delta Mercury Control Program.
 - c. The Monitoring Plan and QAPP may be submitted individually or as part of a comprehensive Monitoring Study Design and Implementation Schedule.
 - i. Monitoring Plan – at a minimum, the Monitoring Plan must include the following information:

- (A) Study objectives and management questions,
 - (B) Constituents to be monitored, analytical methods, and reporting limits as described in the Water Quality Control Plan for the Sacramento River and San Joaquin River Basins, Section 5.8.3.2,
 - (C) Sampling site(s) locations, including latitude and longitude coordinates, water body name and water body segment if applicable,
 - (D) Other monitoring efforts that will provide supplemental data for the local water quality monitoring program and assessment (if any),
 - (E) Proposed monitoring schedule and level of detail included in the Annual Reports.
- ii. Quality Assurance Project Plan shall be consistent with Surface Water Ambient Monitoring Program. All samples shall be collected and analyzed according to the Quality Assurance Project Plan.
- (A) The purpose of the monitoring, brief contextual background, and a brief description of the study design and rationale;
 - (B) Methods used for sample collection: list methods used for sample collection, sample or data collection identification, collection date, and media if applicable;
 - (C) Identification of and rationale for any deviations from the Quality Assurance Project Plan;
 - (D) Results of data collection, including concentration detected, measurement units, reporting limits, and detection limits, if applicable;
 - (E) Quantifiable assessment, analysis, and interpretation of data for each monitoring parameter;
 - (F) Comparison to reference sites (if applicable), guidelines or targets;
 - (G) Discussion of whether data collected addresses the objective(s) or question(s) of study design; and
 - (H) Quantifiable discussion of program/study pollutant reduction effectiveness.

C. TMDL Reporting Requirements

1. The Permittee shall document implementation in the Annual Report any methylmercury best management practices or controls, compliance with erosion and sediment control requirements, and monitoring requirements in this Order, including discussion on Effectiveness Assessment.

2. Progress toward attainment of the wasteload allocations shall be documented in the Mid-Term and End-Term Reports by monitoring methylmercury loads from the MS4 or by quantifying the annual average methylmercury load reduced by implementing pollution prevention activities and source and treatment controls. The Delta Mercury Control Program provides guidance for the calculation of methylmercury loading from urban areas and determination of attainment (see Water Quality Control Plan for the Sacramento River and San Joaquin River Basins, Section 5.8.3.2). The assessment information may come from the Permittee's monitoring efforts, monitoring programs conducted by State or federal agencies or collaborative watershed efforts, or from special studies that evaluate the effectiveness of management practices, as approved by the Central Valley Water Board Executive Officer.

D. Demonstration of Compliance

1. **By 31 December 2030**, the Permittee shall demonstrate attainment of the TMDL wasteload allocation, or as otherwise determined following completion of Phase 1 review of the Delta Mercury Control Program.
2. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV** and the water quality-based effluent limitations established for applicable WLAs for methylmercury in **G6** shall be demonstrated by any one of the following methods:
 - a. Prior to the Final Compliance Deadline:
 - i. Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of methylmercury that are capable of achieving compliance with applicable WLAs; or
 - ii. Prior to Approval of SWMP: Demonstrate that WLAs will be attained through a Reasonable Assurance Analysis (RAA). The RAA shall be submitted and under Central Valley Water Board staff review.
 - b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable methylmercury WLAs.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonably demonstrates attainment of applicable WLAs.
 - d. Attainment of applicable WLAs within the discharge.
 - e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G7. Clear Lake Nutrients TMDL

Permittees: City of Clearlake, County of Lake, City of Lakeport

Applicable Water Body:

- Clear Lake

Water Quality Based Effluent Limitations (WQBELs)

Permittees identified in **G7** shall implement BMPs that will attain the applicable WLAs by the Compliance Deadline and maintain applicable WLA thereafter.

Wasteload Allocations:

The Permittees identified in **G7** have a combined WLA of 2,000 kg phosphorus/year, as an average annual load (five-year rolling average)

Deadline for Attainment of Waste Load Allocations (WLAs):

19 June 2017 ("Final Compliance Date")

TMDL Implementation, Monitoring, and Reporting Requirements and Demonstration of Compliance:

A. TMDL Implementation Requirements

1. Permittees shall implement best management practices to control erosion and sediment discharges as a means of controlling phosphorous. This will be implemented through compliance with the following requirements:
 - a. Discharge Prohibitions, **Part II**;
 - b. **Attachment J** (Pollutant Prioritization Requirements) or **Attachment K** (Prescriptive Requirements) as applicable:
 - i. Program Management - Legal Authority;
 - ii. Program Elements – Illegal Connection and Illicit Discharge Elimination Program;
 - iii. Program Elements – Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping);
 - iv. Program Elements – Planning and Land Development/Post Construction Storm Water Management Program; and
 - c. Effectiveness Assessment, **Part V.F.5**
2. The Permittees identified in **G7** shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve their SWMP (developed pursuant to this Order) and through **Part V.F.6** (Adaptive Management and Modification) modify the SWMP and/or Work Plan by identifying new BMPs

or modifications of existing BMPs to ensure that they are meeting applicable WQBELs.

B. TMDL Monitoring Requirements

1. Within 3 months of the Notice of Applicability, each Permittee shall incorporate individual monitoring and reporting plans, or the Permittees can collectively incorporate a single monitoring plan. The monitoring plans shall enable the Central Valley Water Board to evaluate the MS4 Permittee's progress toward attainment of the wasteload allocations and shall be representative of the respective MS4 service area.
2. With Central Valley Water Board Executive Officer approval, the Permittees may participate in a regional monitoring program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by this section.
3. Permittees that implement individual water quality monitoring pursuant to this provision must develop and implement a Monitoring Plan and Quality Assurance Project Plan as part of the Monitoring Study Design and Implementation Schedule (**Attachment J - J25.B** or **Attachment K – K8.B**, as applicable).
 - a. Monitoring Plan – at a minimum, the Monitoring Plan must include the following information:
 - i. Study objectives and management questions,
 - ii. Constituents to be monitored, analytical methods, and reporting limits,
 - iii. Sampling site(s) locations, including latitude and longitude coordinates, water body name and water body segment if applicable,
 - iv. Other monitoring efforts that will provide supplemental data for the local water quality monitoring program and assessment (if any),
 - v. Proposed schedule and level of detail for monitoring reports. If a more comprehensive report is necessary every few years, the Monitoring Plan shall propose a schedule and description of the level of detail (consistent with the information described below) that will be included within the Mid-Term and End-Term Reports.
 - b. Quality Assurance Project Plan shall be consistent with Surface Water Ambient Monitoring Program. All samples shall be collected and analyzed according to the Quality Assurance Project Plan.
4. Permittees may work with Central Valley Water Board staff to estimate nutrient loadings from activities in the watershed. Loading estimates can be conducted using either water quality monitoring or computer modeling or a combination of the two.

C. TMDL Reporting Requirements

1. Permittees shall document progress toward attainment of the wasteload allocation in the Mid-Term and End-Term Reports, and
 - a. Permittees shall document implementation of erosion and sediment best management practices. The Mid-Term and End-Term Reports shall include documentation of compliance with the above TMDL requirements.
 - b. The Permittees identified in **Section G7** shall complete and submit program effectiveness assessments in their Mid-Term and End-Term Reports as specified in **Part V.G.8** of the Order.
 - c. The Permittees shall use the information gained from **Part V.F.5** (Effectiveness Assessment) to improve their program and identify new best management practices or modifications of existing best management practices to ensure that they are meeting applicable wasteload allocations. The Program Effectiveness Assessment information may come from the Permittees' monitoring efforts; monitoring programs conducted by State or federal agencies or collaborative watershed efforts; or from special studies that evaluate the effectiveness of management practices.
2. Monitoring Reports shall be submitted with the Mid-Term and End-Term Reports and include the following information (consistent with the approved Monitoring Plan):
 - a. The purpose of the monitoring, brief contextual background, and a brief description of the study design and rationale;
 - b. Methods used for sample collection: list methods used for sample collection, sample or data collection identification, collection date, and media if applicable;
 - c. Identification of and rationale for any deviations from the Quality Assurance Project Plan;
 - d. Results of data collection, including concentration detected, measurement units, reporting limits, and detection limits, if applicable;
 - e. Quantifiable assessment, analysis and interpretation of data for each monitoring parameter;
 - f. Comparison to reference sites (if applicable), guidelines or targets;
 - g. Discussion of whether data collected addresses the objective(s) or question(s) of study design; and
 - h. Quantifiable discussion of program/study pollutant reduction effectiveness.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV** and the water quality-based effluent limitations established for applicable WLAs for phosphorus in **G7** shall be demonstrated by any one of the following methods:
 - a. Prior to the Final Compliance Deadline: Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of phosphorus that are capable of achieving compliance with applicable WLAs by the Final Compliance Deadline.
 - b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable phosphorus WLAs.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonably demonstrates attainment of applicable WLAs in the Applicable Water Body.
 - d. Attainment of applicable WLAs within the discharge.
 - e. No discharges from the Permittee's MS4s to the Applicable Water Body.

G8. TMDL for Pyrethroid Pesticides in Sacramento and San Joaquin River Basin

Permittees: City of Roseville, City of Sacramento, County of Sacramento

Applicable Water Bodies:

- Arcade Creek
- Chicken Ranch Slough
- Curry Creek (Placer and Sutter Counties)
- Elder Creek,
- Kaseberg Creek (tributary to Pleasant Grove Creek, Placer County)
- Morrison Creek
- Pleasant Grove Creek (upstream of Fiddymont Road)
- Pleasant Grove Creek South Branch
- Strong Ranch Slough

Water Quality Based Effluent Limitations (WQBELs):

Permittees identified in **G8** shall implement BMPs that will attain the applicable WLAs by the Compliance Deadline and maintain applicable WLAs thereafter.

Wasteload Allocations:

Wasteload allocations equal to the water body loading capacity are assigned to the Permittees identified in **G8**. The loading capacity for each water body segment identified in **G8** is equal to the numeric triggers for pyrethroids below.

The wasteload allocations and numeric triggers are not water quality objectives. A combination of iterative storm water BMP implementation and implementation of the authorities responsible for regulating pesticide use is expected to result in the attainment of the wasteload allocations for storm water discharges. Permittees do not have authority to register or restrict pesticide use within their jurisdiction.

The Central Valley Water Board found that adequate information is not available at this time to conduct a robust review of Water Code section 13241 factors in order to establish numeric water quality objectives for pyrethroids. In particular, quantitative data on the effectiveness of available pyrethroids controls and the ultimate cost to dischargers of attaining potential pyrethroid pesticide water quality objectives is limited.

Pyrethroid Concentration Calculation: Concentrations of pyrethroid pesticides must be above reporting limits (limits of quantitation) to be included; concentrations reported as not-detected or as below the limit of quantitation will be considered as zero (0) in the formulas below. Guidance on acceptable analytical methods is given in the Surveillance and Monitoring chapter under the header Chapter 5.16 Pyrethroid Pesticides Discharges (p. 5-12) of the Water Quality Control Plan for the Sacramento River Basin and the San Joaquin River Basin.

Freely dissolved pyrethroid concentrations may be used in the below formulas to determine the sum of acute and chronic additive concentration goal units (CGUs). The freely dissolved concentration of each quantified pyrethroid pesticide in a sample may be directly measured or estimated using partition coefficients. Methods for direct measurement must be approved by the Executive Officer before they are used to determine the freely dissolved pyrethroid concentrations that are used for determining exceedances of the pyrethroid pesticides numeric triggers. To estimate the freely dissolved concentration of a pyrethroid pesticide with partition coefficients, the following equation shall be used:

$$C_{dissolved} = \frac{C_{total}}{1 + (K_{OC} \times [POC]) + (K_{DOC} \times [DOC])}$$

Where:

- $C_{dissolved}$ = concentration of an individual pyrethroid pesticide that is in the freely dissolved phase (ng/L)
 C_{total} = total concentration of an individual pyrethroid pesticide in water (ng/L)
 K_{OC} = organic carbon-water partition coefficient for the individual pyrethroid pesticide (L/kg)
 $[POC]$ = concentration of particulate organic carbon in the water sample (kg/L), which can be calculated as $[POC] = [TOC] - [DOC]$, where TOC is the concentration of total organic carbon in the sample (kg/L)
 K_{DOC} = dissolved organic carbon-water partition coefficient (L/kg)
 $[DOC]$ = concentration of dissolved organic carbon in the sample (kg/L).

Site-specific or alternative study-based partition coefficients approved by the Executive Officer may be used in the above equation. If site-specific or alternative study-based partition coefficients are not available or have not been approved, the following partition coefficients shall be used in the above equation:

Pyrethroid Pesticide	Ambient Waters K_{OC} (L/kg)	Ambient Waters K_{DOC} (L/kg)
Bifenthrin	4,228,000	1,737,127
Cyfluthrin	3,870,000	2,432,071
Cypermethrin	3,105,000	762,765
Esfenvalerate	7,220,000	1,733,158
Lambda-cyhalothrin	2,056,000	952,809
Permethrin	6,075,000	957,703

Acute Pyrethroid Trigger

The acute additive pyrethroid pesticides numeric trigger is equal to one (1) acute additive concentration goal unit (CGU) not to be exceeded more than once in a three-year period. The CGUs are calculated as the sum of individual measured pyrethroid concentration-to-acute concentration goal ratios, as defined in the following formula. For calculation of CGUs, available samples collected within the applicable averaging period for the numeric trigger will be used to determine exceedances of the trigger. Freely dissolved pyrethroid concentrations may be used in the numerator of each ratio if appropriate data are available, as described in the equation to calculate freely dissolved concentrations given above.

$$CGU_{acute} = \frac{C_{bif}}{ACG_{bif}} + \frac{C_{cyf}}{ACG_{cyf}} + \frac{C_{cyp}}{ACG_{cyp}} + \frac{C_{esf}}{ACG_{esf}} + \frac{C_{lcy}}{ACG_{lcy}} + \frac{C_{per}}{ACG_{per}}$$

Where:

C_{bif} = Average concentration of bifenthrin in ng/L from a 1-hour averaging period

C_{cyf} = Average concentration of cyfluthrin in ng/L from a 1-hour averaging period

C_{cyp} = Average concentration of cypermethrin in ng/L from a 1-hour averaging period

C_{esf} = Average concentration of esfenvalerate in ng/L from a 1-hour averaging period

C_{lcy} = Average concentration of lambda-cyhalothrin in ng/L from a 1-hour averaging period

C_{per} = Average concentration of permethrin in ng/L from a 1-hour averaging period

ACG_{bif} = Bifenthrin acute concentration goal of 0.8 ng/L

ACG_{cyf} = Cyfluthrin acute concentration goal of 0.8 ng/L

ACG_{cyp} = Cypermethrin acute concentration goal of 1 ng/L

ACG_{esf} = Esfenvalerate acute concentration goal of 2 ng/L

ACG_{lcy} = Lambda-cyhalothrin acute concentration goal of 0.7 ng/L

ACG_{per} = Permethrin acute concentration goal of 6 ng/L

CGU_{acute} = The sum of measured pyrethroid concentration-to-acute concentration goal ratios rounded to one significant figure. A sum exceeding one (1) indicates an exceedance of the acute additive pyrethroid pesticides numeric trigger

Chronic Pyrethroid Trigger

The chronic additive pyrethroid pesticides numeric trigger is equal to one (1) chronic additive concentration coal unit (CGU) not to be exceeded more than once in a three-year period. The chronic CGUs are calculated as the sum of individual measured pyrethroid concentration-to-chronic concentration goal ratios, as defined in the following formula. For calculation of CGUs, available samples collected within the applicable averaging period for the numeric trigger will be used to determine exceedances of the trigger. Freely dissolved pyrethroid concentrations may be used in the numerator of each ratio concentrations given above.

$$CGU_{chronic} = \frac{C_{bif}}{CCG_{bif}} + \frac{C_{cyf}}{CCG_{cyf}} + \frac{C_{cyp}}{CCG_{cyp}} + \frac{C_{esf}}{CCG_{esf}} + \frac{C_{lcy}}{CCG_{lcy}} + \frac{C_{per}}{CCG_{per}}$$

Where:

- C_{bif} = Average concentration of bifenthrin in ng/L from a 4-day averaging period
- C_{cyf} = Average concentration of cyfluthrin in ng/L from a 4-day averaging period
- C_{cyp} = Average concentration of cypermethrin in ng/L from a 4-day averaging period
- C_{esf} = Average concentration of esfenvalerate in ng/L from a 4-day averaging period
- C_{lcy} = Average concentration of lambda-cyhalothrin in ng/L from a 4-day averaging period
- C_{per} = Average concentration of permethrin in ng/L from a 4-day averaging period
- CCG_{bif} = Bifenthrin chronic concentration goal of 0.1 ng/L
- CCG_{cyf} = Cyfluthrin chronic concentration goal of 0.2 ng/L
- CCG_{cyp} = Cypermethrin chronic concentration goal of 0.3 ng/L
- CCG_{esf} = Esfenvalerate chronic concentration goal of 0.3 ng/L
- CCG_{lcy} = Lambda-cyhalothrin concentration goal of 0.3 ng/L
- CCG_{per} = Permethrin chronic concentration goal of 1 ng/L
- $CGU_{chronic}$ = The sum of measured pyrethroid concentration-to-chronic concentration goal ratios, rounded to one significant figure. A sum exceeding one (1) indicates an exceedance of the chronic additive pyrethroid pesticides numeric trigger

Deadline for Attainment of Waste Load Allocations (WLAs):

22 April 2039

TMDL Implementation, Monitoring, and Reporting Requirements and Demonstration of Compliance

A. TMDL Implementation Requirements

1. Permittees shall implement the following:

- a. Implement the Pyrethroid Management Plan, as approved by the Central Valley Water Board Executive Officer, which identifies management practices to reduce pyrethroid pesticides in urban runoff to the maximum extent practicable. Management practices may be implemented by individual urban runoff management entities, jointly by two or more entities acting in concert, or cooperatively through a regional or statewide approach that addresses urban pesticide water pollution, including with domestic or municipal wastewater dischargers, as appropriate.
- b. If the State Water Resources Control Board establishes a statewide water quality control plan that requires best management practices for the control of urban pesticide discharges applicable to the Permittee under the Pyrethroid TMDL, compliance with those requirements shall be deemed compliance with the requirement to implement a Pyrethroid Management Plan.

B. TMDL Monitoring Requirements

1. Pyrethroids Monitoring

- a. Within eighteen (18) months of receiving the NOA, the Permittee shall develop and submit a Pyrethroids Monitoring Plan and Quality Assurance Project Plan to be incorporated within the Monitoring Study Design and Implementation Schedule (**Attachment J - J25.B** or **Attachment K – K8.B**, as applicable) for Central Valley Water Board Executive Officer approval and shall implement the Pyrethroids Monitoring Plan once it has been approved by the Central Valley Water Board Executive Officer.
- b. Pyrethroid monitoring plans that address municipal storm water discharges to TMDL water bodies shall be designed to collect information necessary to:
 - i. Determine whether receiving waters are attaining the Pyrethroid Pesticides Water Column Additivity Numeric Targets and whether the wasteload allocations are being attained in discharges as measured at representative receiving water locations by providing pyrethroid and dissolved and particulate organic carbon concentration data;
 - ii. Determine whether bed sediments are attaining the Sediment Toxicity Numeric Target. Chemical analysis of the sediment for pyrethroid pesticides shall be performed if the sediment is toxic;
 - iii. Provide *Hyalella azteca* toxicity data to determine whether pyrethroid pesticides are causing or contributing to exceedances of the narrative water quality objective for toxicity in surface waters;

- iv. Determine whether the implementation of management practices is sufficient to attain the TMDL allocations and numeric targets; and
 - v. In cooperation with the Central Valley Water Board, United States Environmental Protection Agency (USEPA), and Department of Pesticides Regulation, determine if monitoring and reporting programs for alternatives to pyrethroid pesticides are necessary and identify alternative insecticides for which monitoring might be appropriate with consideration of the commercial availability of acceptable analytical methods. If an alternative insecticide is identified as appropriate for monitoring, monitoring shall be performed by the Permittees to determine whether alternatives to pyrethroid pesticides are being discharged at concentrations with the potential to cause or contribute to exceedances of applicable water quality objectives. This information may come from the Permittee's monitoring efforts; monitoring programs conducted by state or federal agencies or collaborative watershed efforts; or from special studies that evaluate the effectiveness of management practices. The Permittee may collect data to recommend a determination as part of the Trend Monitoring Program for review by the cooperating agencies.
- c. The Pyrethroid Monitoring shall include at a minimum:
- i. Monitoring of the receiving water or MS4 discharge as show in **Table G8.1**, below once every five (5) years so that the results can be reported in the End-Term Report:

Table G8.1: Receiving Water or MS4 Discharge Monitoring

Chemical ^a	Units (ng/L)	Sample Type	Minimum Sampling Frequency ^e	Minimum QA/QC Sampling Frequency ^d	Minimum Reporting Level ^{b,c} (ng/L)
Bifenthrin	ng/L	Grab	4/year	1/year	1.3
Cyfluthrin	ng/L	Grab	4/year	1/year	1.3
Cypermethrin	ng/L	Grab	4/year	1/year	1.7
Esfenvalerate	ng/L	Grab	4/year	1/year	3.3
Lambda-cyhalothrin	ng/L	Grab	4/year	1/year	1.2
Permethrin, Total	ng/L	Grab	4/year	1/year	10
Total Organic Carbon	mg/L	Grab	4/year	1/year	-
Dissolved Organic Carbon	mg/L	Grab	4/year	1/year	-

Table Notes:

- a. *Concentrations are total analyte concentrations, including all isomers.*
 - b. *Numbers reported to two significant figures.*
 - c. *Analytical Methods shall not exceed the minimum reporting levels specified in **Table G10.1**. Minimum reporting levels calculated from prohibition trigger limits established by Central Valley Water Board Resolution R5-2017-0057.*
 - d. *The minimum number of Quality Assurance/Quality Control samples collected shall be 20 percent of total water samples collected.*
 - e. *Samples shall be collected for three qualifying wet weather events targeting the first season wet weather event, two (2) other wet weather events that occur after the first season wet weather event and are separated by 72 hours of dry weather, and one dry weather event in one monitoring year. Sample collection may be extended into a subsequent wet season to capture three (3) wet weather events.*
- ii. Proposed sampling locations to collect water samples from either a receiving water or downstream of the MS4 discharge; or from the MS4 discharge itself.
 - iii. Water column and sediment toxicity monitoring, which includes the following:
 - (A) **Water Column Toxicity Testing** – The Permittee shall meet the following acute toxicity testing requirements:
 - (1) Monitoring Frequency – The Permittee shall perform water column toxicity testing four times per year to coincide with **Table G10.1** sampling.
 - (2) Sampling Types – The Permittee shall use static renewal testing. The samples shall be grab samples and be taken at the approved monitoring locations and within 24 hours of the water sampling event.
 - (1) Test Species and Duration – The test species shall consist of *Hyalella azteca* and the duration of the test shall be 96 hours.
 - (2) Methods – The water column toxicity testing samples shall be analyzed using EPA Method EPA-821-R-02-012 (Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms, Fifth Edition, USEPA, October 2002, or most recent edition). Except as

specified in these Provisions, water column toxicity testing shall follow the measurement quality objectives provided in the Surface Water Ambient Monitoring Program Quality Assurance Program Plan. When feasible, the Permittee shall use the Southern California Coastal Water Research Project guidance (Schiff and Greenstein, 2016) on test organism age and size for *Hyalella azteca*. For consistency with EPA Method EPA-821-R-02-012 and Environmental Laboratory Accreditation Program accreditation, *Hyalella azteca* water column toxicity testing for monitoring must be performed at either 20 or 25 degrees Celsius. The test temperature should be the temperature that is closest to the daily average temperature of the water body at the monitoring location on the day the sample is collected. Due to temperature conditions expected during most monitoring events, daily average water temperatures can be assumed to be closer to 20 degrees Celsius. Therefore, this test shall be performed at 20 degrees Celsius, with the following exception: If the Permittee can document that, on the sample date, the daily average water temperature of the water body at the monitoring location was 22.5 degrees Celsius or higher, the test shall be performed at 25 degrees Celsius.

- (3) Reporting – Toxicity shall be evaluated using the Test of Significant Toxicity (TST) statistical approach. Each sample shall be subject to determination of “Pass” or “Fail” and shall indicate “Percent Effect” from toxicity using non-diluted samples.

(B) **Sediment Toxicity Testing** – The Permittee shall meet the following sediment toxicity testing requirements:

- (1) Monitoring Frequency – The Permittee shall perform sediment toxicity testing four (4) times per year to coincide with **Table G8.1** sampling.
- (2) Sampling Types – The Permittee shall identify and collect sediment samples in a depositional area in receiving waters downstream of the MS4 discharge.
- (3) Test Species and Duration – The test species shall consist of *Hyalella azteca* and the duration shall be a 10-day test.
- (4) Methods – The sediment toxicity testing samples shall be analyzed using EPA method EPA-600-R-99-064 (Methods for Measuring the Toxicity and Bioaccumulation of Sediment-

Associated Contaminants with Freshwater Invertebrates, USEPA, 2000, or most recent edition).

- (5) Test Failure – If a toxicity test does not meet all test acceptability criteria as specified in the test method, the Permittee must resample and initiate retesting as soon as possible, not to exceed 14 days following notification of test failure by the laboratory.
 - (6) Observed Toxicity – If *Hyaletta azteca* sediment toxicity is observed, sediment shall be analyzed for pyrethroid pesticides using an ELAP-certified laboratory or method approved by the Executive Officer.
2. Pyrethroid monitoring for one (1) year of monitoring, including at least three qualifying wet weather events and one dry weather event. Pyrethroid monitoring shall be initiated upon approval of the Pyrethroid Monitoring Plan and QAPP. A final report on the Pyrethroid Monitoring shall be provided with the End Term Report. Pyrethroid Monitoring can be completed as a regional group as described in an approved Monitoring Study Design and Implementation Schedule.
3. The Permittee shall use Environmental Laboratory Accreditation Program-accredited laboratories and methods for chemistry and toxicity testing. Environmental Laboratory Accreditation Program-accredited methods are acceptable for pyrethroid chemical analysis provided that the method meets the analytical capability described in Table G10.1. A current list of Environmental Laboratory Accreditation Program-approved laboratories and points of contact can be found on the [Central Valley Water Board's website](https://www.waterboards.ca.gov/centralvalley/water_issues/tmdl/central_valley_projects/pyrethroid_control_program/): (https://www.waterboards.ca.gov/centralvalley/water_issues/tmdl/central_valley_projects/pyrethroid_control_program/).
4. The Permittee shall implement subsequent Pyrethroids Monitoring within five (5) years after completion of the initial Pyrethroids Monitoring described above, and then every five years hence.
5. If the State Water Resources Control Board establishes a statewide water quality control plan for urban pesticide discharges that requires monitoring representative of the MS4's pesticide discharges that meets the goals specified in this section, compliance with those monitoring requirements shall be deemed in compliance with the monitoring requirements specified for the Pyrethroid Pesticide TMDL.

C. TMDL Reporting Requirements

1. The Permittee shall submit a Pyrethroid Pesticides TMDL Progress Report as an attachment to the Mid-Term and End-Term Reports to document the management practices that have been implemented, evaluate attainment of

the wasteload allocations, provide trend monitoring data, and identify effective actions to be taken in the future. If the management practices do not result in attainment of the wasteload allocations, the Permittee shall either modify the Pyrethroid Management Plan to identify reasonable and feasible additional/alternative practices for implementation or provide a justification for why current practices will result in attainment by the compliance date.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV**, and the water quality-based effluent limitations established for applicable WLAs for pyrethroid pesticides in **G8** shall be demonstrated by any one of the following methods:
 - a. Prior to the Final Compliance Deadline:
 - i. Implementation of the BMPs consistent with an approved SWMP that outlines a schedule of BMPs to reduce discharges of pyrethroid pesticides that are capable of achieving compliance with applicable WLAs by the Final Compliance Deadline; or
 - ii. Prior to Approval of SWMP: Demonstrate that WLAs will be attained through a Reasonable Assurance Analysis (RAA). The RAA shall be submitted and under Central Valley Water Board staff review.
 - b. Timely implementation of a Central Valley Water Board-approved time schedule order, pursuant to California Water Code section 13300, for meeting applicable WLAs for pyrethroid pesticides.
 - c. Receiving water monitoring and/or other information, as authorized by the Central Valley Water Board Executive Officer, that reasonably demonstrates attainment of applicable WLAs in the Applicable Water Bodies.
 - d. Attainment of applicable WLAs within the discharge.
 - e. No discharges from the Permittee's MS4s to the Applicable Water Bodies.

G9. Stockton Urban Water Bodies Pathogen TMDL

Permittees: Stockton Area MS4 (City of Stockton and County of San Joaquin)

Applicable Water Bodies:

- Five Mile Slough (from Alexandria Place to Fourteen Mile Slough)
- Lower Calaveras River (from Stockton Diverting Canal to Stockton Deep Water Ship Channel)
- Mormon Slough (from Commerce Street to Stockton Deep Water Ship Channel);
- Mosher Slough (from 3.5 miles upstream of Interstate 5 confluence with Stockton Deep Water Ship Channel);
- Smith Canal (from Yosemite Lake to the confluence with the San Joaquin River); and
- Walker Slough (from Duck Creek confluence to French Camp Slough)

TMDL Background:

On 14 March 2008, through Resolution No. R5-2008-0030, the Central Valley Water Board adopted the TMDL for Pathogens for Five-Mile Slough, Lower Calaveras River, Mormon Slough, Mosher Slough, Smith Canal, and Walker Slough. (See Water Quality Control Policy for Addressing Impaired Waters, State Water Board Resolution No. 2005-0050, p. 5). The TMDL was subsequently approved by USEPA on 13 May 2008.

The Central Valley Water Board found that the existing NPDES permit, and associated *City of Stockton San Joaquin County Pathogen Plan* (Pathogen Plan) were appropriate for implementation of the TMDL and would result in the 303(d) listed waterways meeting pathogen water quality objectives by the conclusion of the Pathogen Plan (Resolution No. R5-2008-0030, Resolved No. 6). If existing regulatory requirements prove insufficient to attain water quality objectives, the Central Valley Water Board may amend the Basin Plan or use its other regulatory authorities to address localized sources of pathogens at a future date (*Id.*, Finding No. 17).

The City of Stockton originally submitted the Pathogen Plan on 18 August 2004. In 2009, the Central Valley Water Board approved updates to the Pathogen Plan as part of the 2009 SWMP.

Water Quality Based Effluent Limitations (WQBELs):

Permittees identified in **Section G9** shall implement BMPs that will attain the applicable WLAs in **Table G-9** by the approved Pathogen Plan's Implementation end date, and after approval of the Updated Pathogen Plan, by the Revised Compliance Deadline and maintain applicable WLAs thereafter.

Waste Load Allocations (WLAs):

Table G-9: Waste Load Allocations

Fecal Coliform Allocation	<i>E. coli</i> Allocation
200/100 mL Geometric Mean ¹ , nor	126/100 mL Geometric Mean ³ , and
400/100 mL for 10% of samples ²	235/100 mL single sample maximum

1. Geometric Mean concentration of not less than five samples for any 30-day period.
2. During any 30-day period.
3. Geometric Mean concentration of a statistically sufficient number of samples (generally not less than five samples equally spaced over a 30-day period).

Deadline for Attainment of Waste Load Allocations (WLAs):

The Central Valley Water Board approved the prior Pathogen Plan on 8 October 2009. The approved Pathogen Plan included an Implementation Schedule end date of 30 June 2018. The TMDL Implementation Requirements below, require an update to the Pathogen Plan, which would include revisions to the Pathogen Plan, schedule and Compliance Deadline ("Revised Compliance Deadline"). Modifications of the Pathogen Plan must be approved by the Central Valley Water Board after a hearing. After approval of the Updated Pathogen Plan, the Revised Compliance Deadline will be the effective deadline for attainment of the WLAs.

The following provisions apply to the Permittees identified in **Section G9** upon issuance of NOAs.

TMDL Implementation, Monitoring and Reporting Requirements, and Demonstration of Compliance:

A. TMDL Implementation Requirements

1. Within one (1) year from the effective date of the NOA, the Permittees shall:
 - a. Submit an updated Pathogen Plan or other monitoring and implementation activities consistent with the Stockton Urban Water Bodies Pathogen Control Program. The Updated Pathogen Plan must be approved by the Central Valley Water Board after a hearing. The update shall identify:
 - i. specific BMPs, projects, and activities implemented to reduce the Permittee's MS4 contribution of pathogens;
 - ii. implementation dates for proposed BMPs, projects, and activities; and
 - iii. deadlines for implementing proposed BMPs, projects, and activities and the Revised Compliance Deadline.

If necessary, additional controls and regulatory options will be identified by the Central Valley Water Board with assistance by the Permittees to address the impairment.

- b. The Permittees shall use the information gained from **Part V.F.5** (Effectiveness Assessments) to improve the SWMP, once a revised SWMP has been approved by the Central Valley Water Board and through **Part V.F.6** (Adaptive Management and Modification) to modify the SWMP and/or Work Plan by identifying new BMPs or modifications of existing BMPs, as needed to ensure that they are meeting applicable WQBELs.
2. As an alternative to **G9.A.1**, within one (1) year of the effective date of the Order, the Permittees may provide a work plan as a part of the Updated Pathogen Plan for conducting a bacteria study that demonstrates that: a) the Permittee's MS4 is not causing or contributing to receiving water exceedances; b) that alternative averaging periods are better aligned with the underlying science on the risk to recreators defined in the 2012 USEPA Criteria; or c) that other risk-based approaches used within the state demonstrate that the risk to the recreators in the Stockton Urban Water Bodies is aligned with the 2012 USEPA Criteria and/or the 2019 State Water Board Bacteria Provisions. The work plan must include detailed planning and rationale, sampling methods, and a QAPP. The work plan must include interim and final deadlines for completing the study and should have a final completion date within 2.5 years of Central Valley Water Board approval of the work plan.

B. TMDL Monitoring Requirements

1. Monitoring and assessment information may come from the Permittees' monitoring efforts; monitoring programs conducted by State or federal agencies or collaborative watershed efforts; or from special studies that evaluate the effectiveness of management practices.
2. With Central Valley Water Board Executive Officer approval, the Permittees may participate in the Delta Regional Monitoring Program or other collective monitoring efforts in lieu of some or all of the individual monitoring requirements required by the Pathogen Plan.

C. TMDL Reporting Requirements

1. The Permittees shall document in Mid-Term and End-Term Reports the implementation of BMPs to control the discharge of pathogens in their urban discharge.
2. The Permittees shall complete and submit program effectiveness assessments in their Mid-Term and End-Term Reports as specified in **Part V.G.7** of the Order that includes assessment of the effectiveness of the

BMPs implemented to control the discharge of pathogens in their urban discharge.

D. Demonstration of Compliance

1. Compliance with the Discharge Prohibitions in **Part II.A**, Effluent Limitations in **Part III.B**, and Receiving Water Limitations in **Part IV**, and the water quality-based effluent limitations established for applicable WLAs in **G9** may be demonstrated by any one of the following methods:
 - a. Receiving water monitoring and/or other information, as authorized by the Executive Officer, that reasonably demonstrates attainment of applicable WLAs in the Applicable Water Bodies.
 - b. Attainment of applicable WLAs within the discharge.
 - c. No discharges from the Permittee's MS4s to the Applicable Water Bodies.
 - d. Implementation of the BMPs consistent with the approved Updated Pathogen Plan that outlines a schedule of BMPs that are capable of achieving compliance with applicable WLAs.
 - e. Timely implementation of a Central Valley Water Board-approved Time Schedule Order, pursuant to California Water Code section 13300, for meeting applicable WLAs.
 - f. Demonstrate that concentrations in the receiving water are below the State Board's criteria outlined in *Part 3 of the Water Quality Control Plan for Inland Surface Waters, Enclosed Bays, and Estuaries of California Bacteria Provisions and Water Quality Standards Variance Policy, 4 February 2019*.
 - g. Demonstrate compliance through a natural source study described in section IV.E.2 of the State Water Board's Bacteria Policy.
 - h. Demonstrate through an approved work plan that an alternative averaging period or an alternative indicator that is aligned with the 2012 USEPA Criteria and/or the 2019 State Water Board Bacteria Provisions that concentrations in the receiving water are below levels that pose a risk to human health.

ATTACHMENT H – Standard Permit Provisions and General Provisions

A. Standard Permit Provisions

Code of Federal Regulations Title 40 section 122.41 (40 CFR 122.41) includes conditions, or provisions, that apply to all National Pollution Discharge Elimination System (NPDES) permits. Additional provisions applicable to NPDES permits are in 40 CFR 122.42. All applicable provisions in 40 CFR 122.41 and 40 CFR 122.42 shall be incorporated into this Order and NPDES permit. The applicable 40 CFR 122.41 and 40 CFR 122.42 provisions are as follows:

1. Duty to Comply [CFR 122.41(a)]

The Permittee shall comply with all of the provisions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act (CWA) and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.

- a. The Permittee shall comply with effluent standards or prohibitions established under section 307(a) of the CWA for toxic pollutants and with standards for sewage sludge use or disposal established under Section 405(d) of the CWA within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if the permit has not yet been modified to incorporate the requirement. [40 CFR 122.41(a)(1); California Water Code (Water Code) sections 13261, 13263, 13265, 13268, 13300, 13301, 13304, 13340, 13350, 13385)]
- b. The CWA provides that any person who violates Section 301, 302, 306, 307, 308, 318 or 405 of the CWA, or any permit condition or limitation implementing any such sections in a permit issued under section 402, or any requirement imposed in a pretreatment program approved under Section 402(a)(3) or 402(b)(8) of the CWA, is subject to a civil penalty not to exceed \$25,000 per day for each violation. The CWA provides that any person who *negligently* violates Section 301, 302, 306, 307, 308, 318, or 405 of the CWA, or any condition or limitation implementing any of such sections in a permit issued under Section 402 of the CWA, or any requirement imposed in a pretreatment program approved under Section 402(a)(3) or 402(b)(8) of the CWA, is subject to criminal penalties of \$2,500 to \$25,000 per day of violation, or imprisonment of not more than 1 (1) year, or both. In the case of a second or subsequent conviction for a negligent violation, a person shall be subject to criminal penalties of not more than \$50,000 per day of violation, or by imprisonment of not more than two (2) years, or both. Any person who *knowingly* violates such sections, or such conditions or limitations is subject to criminal penalties of \$5,000 to \$50,000 per day of violation, or imprisonment for not more than three (3) years, or both. In the case of a second or subsequent conviction for a knowing violation, a person shall be subject to criminal penalties of not more than \$100,000 per day of violation, or

- imprisonment of not more than six (6) years, or both. Any person who knowingly violates Section 301, 302, 303, 306, 307, 308, 318 or 405 of the CWA, or any permit condition or limitation implementing any of such sections in a permit issued under Section 402 of the CWA, and who knows at that time that he thereby places another person in imminent danger of death or serious bodily injury, shall, upon conviction, be subject to a fine of not more than \$250,000 or imprisonment of not more than fifteen (15) years, or both. In the case of a second or subsequent conviction for a knowing endangerment violation, a person shall be subject to a fine of not more than \$500,000 or by imprisonment of not more than thirty (30) years, or both. An organization, as defined in Section 309(c)(3)(B)(iii) of the CWA, shall, upon conviction of violating the imminent danger provision, be subject to a fine of not more than \$1,000,000 and can be fined up to \$2,000,000 for second or subsequent convictions. [40 CFR 122.41(a)(2)].
- c. Any person may be assessed an administrative penalty by the Central Valley Regional Water Quality Control Board (Central Valley Water Board), State Water Resources Control Board (State Water Board), or United States Environmental Protection Agency (USEPA) for violating Section 301, 302, 306, 307, 308, 318 or 405 of the CWA, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of this Act. Administrative penalties for Class I violations are not to exceed \$10,000 per violation, with the maximum amount of any Class I penalty assessed not to exceed \$25,000. Penalties for Class II violations are not to exceed \$10,000 per day for each day during which the violation continues, with the maximum amount of any Class II penalty not to exceed \$125,000. [40 CFR 122.41(a)(3)].

2. Duty to Reapply [40 CFR 122.41(b)]

If the Permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the Permittee shall apply for and obtain a new permit.

3. Need to Halt or Reduce Activity Not A Defense [40 CFR 122.41(c)]

It shall not be a defense for a Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

4. Duty to Mitigate [40 CFR 122.41(d)]

The Permittee shall take all reasonable steps to minimize or prevent any discharge or prevent any discharge or sludge use or disposal in violation of this permit that has a reasonable likelihood of adversely affecting human health or the environment.

5. Proper Operation and Maintenance [40 CFR 122.41(e)]

The Permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems that are installed by a Permittee only when the operation is necessary to achieve compliance with the conditions of this permit.

6. Permit Actions [40 CFR 122.41(f)]

This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.

7. Property Rights [40 CFR 122.41(g)]

This permit does not convey any property rights of any sort, or any exclusive privilege.

8. Duty to Provide Information [40 CFR 122.41(h)]

Permittee shall furnish to the Central Valley Water Board, State Water Board, or USEPA within a reasonable time, any information which the Central Valley Water Board, State Water Board, or USEPA may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The Permittee shall also furnish to the Central Valley Water Board, State Water Board, or USEPA upon request, copies of records required to be kept by this permit.

9. Inspection and Entry [40 CFR 122.41(i)]

The Permittee shall allow the Central Valley Water Board, State Water Board, USEPA, and/or their authorized representative (including an authorized contractor acting as their representative), upon presentation of credentials and other documents as may be required by law, to [33 United States Code section 1318(a)(4)(B); 40 CFR 122.41(i); California Water Code sections 13267 and 13383]:

- a. Enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records shall be kept under the conditions of this permit; [40 CFR 122.41(i)(1)]
- b. Have access to and copy, at reasonable times, any records that shall be kept under the conditions of this permit; [40 CFR 122.41(i)(2)]

- c. Inspect and photograph at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; [40 CFR 122.41(i)(3)] and
- d. Sample or monitor at reasonable times, for the purpose of assuring permit compliance or as otherwise authorized by the CWA, any substances or parameters at any location. [40 CFR 122.41(i)(4)]

10. Monitoring and Records [40 CFR 122.41(j); 40 CFR 122.44(i)]

- a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity. [40 CFR 122.41(j)(1)]
- b. Except for records of monitoring information required by this permit related to the Permittee's sewage sludge use and disposal activities, which shall be retained for a period of at least five (5) years (or longer as required by 40 CFR Part 503), the Permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least three (3) years from the date of the sample, measurement, report or application. This period may be extended by request of the Central Valley Water Board at any time. [40 CFR 122.41(j)(2)]
- c. Records for monitoring information shall include: [40 CFR 122.41(j)(3)]
 - i. The date, exact place, and time of sampling or measurements; [40 CFR 122.41(j)(3)(i)]
 - ii. The individual(s) who performed the sampling or measurements; [40 CFR 122.41(j)(3)(ii)]
 - iii. The date(s) analyses were performed; [40 CFR 122.41(j)(3)(iii)]
 - iv. The individual(s) who performed the analyses; [40 CFR 122.41(j)(3)(iv)]
 - v. The analytical techniques or methods used; [40 CFR 122.41(j)(3)(v)] and
 - vi. The results of such analyses. [40 CFR 122.41(j)(3)(vi)]
- d. Monitoring shall be conducted according to test procedures under 40 CFR Part 136 unless another method is required under 40 CFR Subchapters N or O. [40 CFR 122.41(j)(4)]

In the case of pollutants for which there are no approved methods under 40 CFR Part 136 or otherwise required under 40 CFR Subchapters N and O,

monitoring shall be conducted according to a test procedure specified in the permit for such pollutants. [40 CFR 122.44(i)(1)(iv)]

- e. The CWA provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than two (2) years, or both. If a conviction of a person is for a violation committed after a first conviction of such person under this paragraph, punishment is a fine of not more than \$20,000 per day of violation, or by imprisonment of not more than four (4) years, or both. [40 CFR 122.41(j)(5)]

11. Signatory Requirement [40 CFR 122.41(k); 40 CFR 122.22(a)-(d)]

- a. All applications, reports, or information submitted to the Central Valley Water Board, State Water Board, or USEPA shall be signed and certified. (See 40 CFR 122.22) [40 CFR 122.41(k)(1)]
 - i. For a municipality, State, Federal, or other public agency. [All applications shall be signed] [b]y either a principal executive officer or ranking elected official. [40 CFR 122.22(a)(3)]
 - ii. All reports required by permits, and other information requested by the Central Valley Water Board, State Water Board, or USEPA shall be signed by a person described in paragraph (a) of this section, or by a duly authorized representative of that person. A person is a duly authorized representative only if:
 - (1) The authorization is made in writing by a person described in paragraph (a) of this section; [40 CFR 122.22(b)(1)]
 - (2) The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the company, (A duly authorized representative may thus be either a named individual or any individual occupying a named position.) [40 CFR 122.22(b)(2)] and,
 - (3) The written authorization is submitted to the Central Valley Water Board and State Water Board. [40 CFR 122.22(b)(3)].
 - iii. Changes to authorization. If an authorization under paragraph (b) of this section is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph (b) of this section shall be

submitted to the Central Valley Water Board prior to or together with any reports, information, or applications to be signed by an authorized representative. [40 CFR 122.22(c)]

- iv. Certification. Any person signing a document under paragraph (a) or (b) of this section shall make the following certification:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.” [40 CFR 122.22(d)]
- b. The CWA provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or non-compliance shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than six (6) months per violation, or by both. [40 CFR 122.41(k)(2)]
- c. Documents submitted electronically shall include a verified electronic signature (e.g., Adobe e-signature, DocuSign, or equivalent).

12. Reporting Requirements [40 CFR 122.41(l)]

- a. Planned changes. The Permittee shall give notice to the Central Valley Water Board as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required only when: [40 CFR 122.41(l)(1)]
 - i. The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 CFR 122.29(b); [40 CFR 122.41(l)(1)(i)] or
 - ii. The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements under 40 CFR 122.42(a)(1). [40 CFR 122.41(l)(1)(ii)]
 - iii. The alteration or addition results in a significant change in the Permittee's sludge use or disposal practices, and such alteration, addition, or change

may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan. [40 CFR 122.41(l)(1)(iii)]

- b. Anticipated noncompliance. The Permittee shall give advance notice to the Central Valley Water Board of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. [40 CFR 122.41(l)(2)]
- c. Transfers. This permit is not transferable to any person except after notice to the Central Valley Water Board. The Central Valley Water Board may require modification or revocation and reissuance of the permit to change the name of the Permittee and incorporate such other requirements as may be necessary under the CWA. [40 CFR 122.41(l)(3)]
- d. Monitoring reports. Monitoring results shall be reported at the intervals specified elsewhere in this permit. [40 CFR 122.41(l)(4)]
 - i. Monitoring results shall be reported as specified by the Central Valley Water Board or State Water Board for reporting results of monitoring of sludge use or disposal practices. [40 CFR 122.41(l)(4)(i)]
 - ii. If the Permittee monitors any pollutant more frequently than required by the permit using test procedures approved under 40 CFR Part 136 or another method required for an industry-specific waste stream under 40 CFR Subchapters N or O, the results of this monitoring shall be included in the calculation and reporting of the data submitted to the Central Valley Water Board or State Water Board. [40 CFR 122.41(l)(4)(ii)]
 - iii. Calculations for all limitations which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified in the permit. [40 CFR 122.41(l)(4)(iii)]
- e. Compliance schedules. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than fourteen (14) days following each schedule date. [40 CFR 122.41(l)(5)]
- f. Twenty-four-hour reporting.
 - i. The Permittee shall report any noncompliance that may endanger health or the environment. Any information shall be provided orally within twenty-four (24) hours from the time the Permittee becomes aware of the circumstances. A written submission shall also be provided within five (5) days of the time the Permittee becomes aware of the circumstances. The

written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance. [40 CFR 122.41(l)(6)(i)]

- ii. The following shall be included as information which shall be reported within twenty-four (24) hours under this paragraph: [40 CFR 122.41(l)(6)(ii)]
 - (1) Any unanticipated bypass that exceeds any effluent limitation in the permit (See 40 CFR 122.41(g)). [40 CFR 122.41(l)(6)(ii)(A)]
 - (2) Any upset which exceeds any effluent limitation in the permit. [40 CFR 122.41(l)(6)(ii)(B)] and,
 - (3) Violation of a maximum daily discharge limitation for any of the pollutants listed by the Central Valley Water Board in the permit to be reported within twenty-four (24) hours. (See 40 CFR 122.44(g)) [40 CFR 122.41(l)(6)(ii)(C)]
- iii. The Central Valley Water Board may waive the written report on a case-by-case basis if the oral report has been received within twenty-four (24) hours. [40 CFR 122.41(l)(6)(iii)]
- g. Other noncompliance. The Permittee shall report all instances of noncompliance not reported in accordance with the standard provisions required under 40 CFR 122.41(l)(4), (5), and (6), at the time monitoring reports are submitted. The reports shall contain the information listed in the standard provisions required under 40 CFR 122.41(l)(6). [40 CFR 122.41(l)(7))]
- h. Other information. When the Permittee becomes aware that it failed to submit any relevant facts in a permit application or submitted incorrect information in a permit application or in any report to the Central Valley Water Board, State Water Board, or USEPA, the Permittee shall promptly submit such facts or information. [40 CFR 122.41(l)(8)]

13. Bypass [40 CFR 122.41(m)]

- a. Definitions.
 - i. *Bypass* means the intentional diversion of waste streams from any portion of a treatment facility. [40 CFR 122.41(m)(1)(i)] or
 - ii. *Severe property damage* means substantial physical damage to property, damage to the treatment facilities which causes them to become

inoperable, or substantial and permanent loss of natural resources which can reasonably be *expected* to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production. [40 CFR 122.41(m)(1)(ii)]

- b. Bypass not exceeding limitations. The Permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to the standard provisions required under 40 CFR 122.41(m)(3) and (4). [40 CFR 122.41(m)(2)]
- c. Notice.
 - i. *Anticipated* bypass. If the Permittee knows in advance of the need for a bypass, it shall submit a notice, if possible, at least ten (10) days before the date of the bypass. [40 CFR 122.41(m)(3)(i)] or
 - ii. *Unanticipated* bypass. The Permittee shall submit notice of an unanticipated bypass in accordance with the standard provisions required under 40 CFR 122.41(l)(6) (24-hour notice). [40 CFR 122.41(m)(3)(ii)]
- d. Prohibition of Bypass.
 - i. *Bypass* is prohibited, and the Central Valley Water Board may take enforcement action against a Permittee for bypass, unless: [40 CFR 122.41(m)(4)(i)]
 - (1) Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage; [40 CFR 122.41(m)(4)(i)(A)]
 - (2) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; [40 CFR 122.41(m)(4)(i)(B)] and,
 - (3) The Permittee submitted notices in accordance with the standard provisions required under 40 CFR 122.41(m)(3). [40 CFR 122.41(m)(4)(i)(C)]
 - ii. The *Central Valley Water Board* may approve an anticipated bypass, after considering its adverse effects, if the Central Valley Water Board determines that it will meet the three (3) conditions listed above. [40 CFR 122.41(m)(4)(ii)]

14. Upset [40 CFR 122.41(n)]

- a. Definition. *Upset* means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation. [40 CFR 122.41(n)(1)]
- b. Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology-based permit effluent limitations if the standard provisions required under 40 CFR 122.41(n)(3) are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review. [40 CFR 122.41(n)(2)]
- c. Conditions necessary for a demonstration of upset. A Permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that: [40 CFR 122.41(n)(3)]
 - i. An upset occurred and that the Permittee can identify the cause(s) of the upset; [40 CFR 122.41(n)(3)(i)]
 - ii. The permitted facility was at the time being properly operated; [40 CFR 122.41(n)(3)(ii)] and
 - iii. The Permittee submitted notice of the upset in accordance with the standard provisions required under 40 CFR 122.41(l)(6)(ii)(B) (24-hour notice). [40 CFR 122.41(n)(3)(iii)]
 - iv. The Permittee complied with any remedial measures pursuant to the standard provisions required under 40 CFR 122.41(d). [40 CFR 122.41(n)(3)(iii)]
- d. Burden of proof. In any enforcement proceeding, the Permittee seeking to establish the occurrence of an upset has the burden of proof. [40 CFR 122.41(n)(4)]

15. Standard Permit Provisions for Municipal Separate Storm Sewer Systems [40 CFR 122.42(c)]

The operator of a small, medium, or large MS4 or a municipal separate storm sewer that has been designated by the Central Valley Water Board under 40 CFR 122.26(a)(1)(v) shall submit an annual report by the anniversary of the date of the issuance of the permit for such system. The report shall include:

- a. The status of implementing the components of the Storm Water Management Program that are established as permit conditions; [40 CFR 122.42(c)(1)]
- b. Proposed changes to the Storm Water Management Program that are established as permit conditions. Such proposed changes shall be consistent with 40 CFR 122.26(d)(2)(iii); [40 CFR 122.42(c)(2)] and
- c. Revisions, if necessary, to the assessment of controls and the fiscal analysis reported in the permit application under 40 CFR 122.26(d)(2)(iv) and (v); [40 CFR 122.42(c)(3)]
- d. A summary of data, including monitoring data, that is accumulated throughout the reporting year; [40 CFR 122.42(c)(4)]
- e. Annual expenditures and budget for year following each annual report; [40 CFR 122.42(c)(5)]
- f. A summary describing the number and nature of enforcement actions, inspections, and public education programs; [40 CFR 122.42(c)(6)]
- g. Identification of water quality improvements or degradation. [40 CFR 122.42(c)(7)]

16. Standard Permit Provisions for Storm Water Discharges [40 CFR 122.42(d)]

The initial permits for discharges composed entirely of storm water issued pursuant to 40 CFR 122.26(e)(7) shall require compliance with the conditions of the permit as expeditiously as practicable, but in no event later than three (3) years after the date of issuance of the permit.

B. General Provisions

In addition to the standard provisions required to be incorporated into the Order and NPDES permit pursuant to 40 CFR 122.22, 122.41, 122.42, 122.44, and 40 CFR Part 136 several other general provisions apply to this Order. The general provisions applicable to this Order and NPDES permit are as follows:

1. Discharge of Waste Is a Privilege

No discharge of waste into the waters of the State, whether or not such discharge is made pursuant to waste discharge requirements, shall create a vested right to continue the discharge. All discharges of waste into waters of the State are privileges, not rights. [Water Code section 13263(g)]

2. Duration of Order and NPDES Permit

- a. Effective date. This Order and NPDES permit become effective 100 days after its adoption provided the USEPA has no objection. If the USEPA objects

to its issuance, this Order shall not become effective until such objection is withdrawn.

As of the effective coverage date specified in the Permittee's application for coverage, this Order shall supersede the applicability of any preexisting order or permit regulating the operation of, and discharges from, the Permittee's MS4. The Central Valley Water Board retains continuing authority to take enforcement action for violations of such preexisting orders or permits that occurred prior to the Permittee's effective coverage date under this Order.

- b. Expiration. This Order and NPDES permit expire five (5) years after its effective date. [40 CFR 122.46(a)]
- c. Continuation of expired order. After this Order and NPDES permit expires, the terms and conditions of this Order and NPDES permit are automatically continued pending issuance of a new permit if all requirements of the federal NPDES regulations on the continuation of expired permits (40 CFR 122.6) are complied with.

3. Availability

A copy of this Order shall be kept at a readily accessible location and shall be available to on-site personnel at all times.

4. Confidentiality of Information

Except as provided for in 40 CFR 122.7, no information or documents submitted in accordance with or in application for this Order will be considered confidential and all such information and documents shall be available for review by the public at the Central Valley Water Board office.

Claims of confidentiality for the following information will be denied: [40 CFR 122.7(b)]

- a. The name and address of any permit applicant or Permittee; [40 CFR 122.7(b)(1)] and
- b. Permit applications and attachments, permits, and effluent data. [40 CFR 122.7(b)(2)]

5. Effluent Limitations

- a. Interim effluent limitations. The Permittee shall comply with any interim effluent limitations as established by addendum, enforcement action, or revised waste discharge requirements which have been, or may be, adopted by the Central Valley Water Board.

- b. Other effluent limitations and standards of sections 301, 302, 303, 307, 318 and 405 of CWA. If any applicable toxic effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is promulgated under Section 307(a) of the CWA for a toxic pollutant and that standard or prohibition is more stringent than any limitation on the pollutant in the permit, the Central Valley Water Board shall institute proceedings under these regulations to modify or revoke and reissue the permit to conform to the toxic effluent standard or prohibition. [40 CFR 122.44(b)(1)]

6. Permit Actions

The filing of a request by the Permittee for modification, revocation and reissuance, or termination of this Order, or a notification of planned change in or anticipated noncompliance with this Order does not stay any condition of this Order. (See 40 CFR 122.41(f)) In addition, the following provisions apply to this Order:

- a. Upon application by any affected person, or on its own motion, the Central Valley Water Board may review and revise the requirements in this Order. All requirements shall be reviewed periodically. [Water Code section 13263(e)]
- b. This Order may be terminated or modified for cause, including, but not limited to, all of the following: [Water Code section 13381]
 - i. Violation of any condition contained in the requirements of this Order. [Water Code section 13381(a)]
 - ii. Obtaining the requirements in this Order by misrepresentation, or failure to disclose fully all relevant facts. [Water Code section 13381(b)]
 - iii. A change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge. [Water Code section 13381(c)]
- c. When this Order is transferred to a new owner or operator, such requirements as may be necessary under the Water Code can be incorporated into this Order.

7. Monitoring

In addition to the standard provisions required under 40 CFR 122.41(j) and (l)(4), the following general monitoring provisions apply to this Order:

- a. Where procedures are not otherwise specified in Order, sampling, analysis and quality assurance/quality control shall be conducted in accordance with the Quality Assurance Management Plan (QAMP) for the State of California's

Surface Water Ambient Monitoring Program (SWAMP), adopted by the State Water Resources Control Board.

- b. Pursuant to 40 CFR 122.41(j)(2) and Water Code section 13383(a), the Permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least five (5) years from the date of the sample, measurement, report or application. This period may be extended by request of the Central Valley Water Board at any time.
- c. All chemical, bacteriological, and toxicity analyses shall be conducted at a laboratory certified for such analyses by the California Department of Public Health or a laboratory approved by Central Valley Water Board staff.
- d. For priority pollutants, MLs shall be used for all analyses, unless otherwise specified. Reporting Levels (RL) must be lower than or equal to the ML value. If a particular ML is not attainable in accordance with procedures set forth in 40 CFR 136, the lowest quantifiable concentration of the lowest calibration standard analyzed by a specific analytical procedure may be used instead.
- e. Each monitoring report submitted with an Annual Report to the Central Valley Water Board shall include flow measurements for each sampling event and a spreadsheet of water quality monitoring with the sampling event identifier, site code, sample type, date and time sampled, analyte and fraction, methods, results, including non-detections, reporting and minimum detection limits, units, laboratory names and locations, lowest water quality objective and source, and whether or not the result was an exceedance.

8. Enforcement

- a. The Central Valley Water Board is authorized to enforce the terms of this Order under several provisions of the Water Code, including, but not limited to, Water Code sections 13385, 13386, and 13387.
- b. Nothing in this Order shall be construed to protect the Permittee from its liabilities under federal, state, or local laws.
- c. The Water Code provides for civil and criminal penalties comparable to, and in some cases greater than, those provided for under the CWA.
- d. Except as provided in the standard conditions required under 40 CFR 122.41(m) and (n), nothing in this Order shall be construed to relieve the Permittee from civil or criminal penalties for noncompliance.

- e. Nothing in this Order shall be construed to preclude the institution of any legal action or relieve the Permittee from any responsibilities, liabilities, or penalties to which the Permittee is or may be subject to under Section 311 of the CWA.
- f. Nothing in this Order shall be construed to preclude institution of any legal action or relieve the Permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable state law or regulation under authoring preserved by Section 510 of the CWA.

9. Severability

The provisions of this Order are severable, and if any provision of this Order, or the application of any provisions of this Order to any circumstance, is held invalid, the application of such provision to other circumstances and the remainder of this Order shall not be affected thereby.

10. Applications

Any application submitted by the Permittee for reissuance or modification of this Order shall satisfy all applicable requirements specified in federal regulations as well as any additional requirements for submittal of a Notice of Intent specified in the Water Code and the California Code of Regulations.

11. Implementation

All plans, reports and subsequent amendments submitted in compliance with this Order shall be implemented immediately (or as otherwise specified). All submittals by the Permittee shall be adequate to implement the requirements of this Order.

12. Modification of Order

This Order may be modified, revoked, and reissued, or terminated for cause due to promulgation of amended regulations, receipt of USEPA guidance concerning regulated activities, judicial decision, or in accordance with 40 CFR 122.62, 122.63, 122.64, and 124.5. The Central Valley Water Board may additionally reopen and modify this Order at any time prior to its expiration, after opportunity for public comment and a public hearing in accordance with the following circumstances:

- a. If the Central Valley Water Board determines that revisions are warranted to those provisions of the Order (a) addressing compliance with water quality objectives or water quality standards in the receiving water; and/or (b) those provisions of the Order establishing an iterative process for implementation of management practices to assure compliance with water quality standards in the receiving waters.

- b. Minor modifications to the Order may be made by the Central Valley Water Board where the proposed modification complies with all the prohibitions and limitations, and other requirements of this Order.
- c. Proposed modifications to the Order that are not minor require amendment of this Order in accordance with this Order's rules, policies, and procedures.
- d. New or revised water quality objectives come into effect, or any TMDL is adopted or revised (i.e., TMDL-specific permit requirements) that is applicable to the Permittee.
- e. New programs, policies or plans come into effect including, but not limited to, a Sacramento-San Joaquin Delta and other regional monitoring plans, Biological Objectives Policy, Nutrients for Inland Surface Waters Policy, and/or Toxicity Assessment and Control Plan, that are applicable to the Permittee.

13. Report Submittals

- a. All report submittals shall include an executive summary, introduction, conclusion, recommendations, and signed certified statement.
- b. Each Permittee shall submit a signed certified statement covering its responsibilities for each applicable submittal.
- c. The Permittee shall submit a signed certified statement covering its responsibilities for each applicable submittal and the sections of the submittals for which it is responsible.
- d. Unless otherwise directed by the Central Valley Water Board Executive Officer, the Permittee shall electronically submit via CentralValleySacramento@waterboards.ca.gov or upload all application, plans, reports, changes of information, and any other documents required by this Order using the Stormwater Multiple Application and Report Tracking System (SMARTS)¹³⁸, when available. Plans, reports, and any other documents shall comply with the signatory requirements of **Attachment H**.
- e. The Permittee shall provide notifications as required by this Order to the Central Valley Water Board Executive Officer at CentralValleySacramento@waterboards.ca.gov and the USEPA at gullapalli.prasad@epa.gov

¹³⁸ Upon the State Water Board or Central Valley Water Board notifying the Permittee in writing that this Water Board-approved system has changed, the Permittee shall use the newly specified system.

ATTACHMENT I – DETERMINATION OF EROSION POTENTIAL

Ep is determined as follows - The *total effective work* done on the channel boundary is derived and used as a metric to predict the likelihood of channel adjustment given watershed and stream hydrologic and geomorphic variables. The index under urbanized conditions is compared to the index under pre-urban conditions expressed as a ratio (Ep). The effective work index (*W*) can be computed in a number of different ways including simplistic work equations, material specific sediment transport equations, or more complex functions based on site calibrated sediment rating curves. One such work equation, which represents the total work done on the channel boundary, includes the following:

$$W = \sum_{i=1}^n (\tau_i - \tau_c)^{1.5} * V * \Delta t_i \quad (1)$$

Where:

W = effective work

τ_c = critical shear stress that initiates bed mobility or erodes the weakest bank layer

τ_i = applied hydraulic shear stress

Δt = duration of flows (in hours)

V=mid-channel flow velocity

n = length of flow record.

The effective work index for presumed stable stream channels under pre-urban conditions is compared to stable and unstable channels under current urbanized conditions. The comparison, expressed as a ratio, is defined as the Erosion Potential (Ep)¹³⁹ (McRae (1992, 1996)).

¹³⁹ MacRae, C.R. 1992. *The Role of Moderate Flow Events and Bank Structure in the Determination of Channel Response to Urbanization. Resolving conflicts and uncertainty in water management: Proceedings of the 45th Annual Conference of the Canadian Water Resources Association*. Shrubsole, D, ed. 1992, pg. 12.1-12.21; MacRae, C.R. 1996. Experience from Morphological Research on Canadian Streams: Is Control of the Two-Year Frequency Runoff Event the Best Basis for Stream Channel Protection. Effects of Watershed Development and Management on Aquatic Ecosystems, ASCE Engineering Foundation Conference, Snowbird, Utah, pg. 144-162.

$$Ep = \frac{W_{post}}{W_{pre}} \quad (2)$$

W_{post} = work index estimated for the post-urban condition
W_{pre} = work index estimated for the pre-urban condition

Alternatively, a sediment transport function such as the Brownlie equation or the Meyer-Peter and Muller equation (*US Department of Agriculture, Natural Resources Conservation Service, 2007. Part 654 Stream Restoration Design, National Engineering Handbook, August 2007*) can be used to demonstrate appropriate Hydromodification control.

Attachment J – Pollutant Prioritization Requirements

The purpose of this attachment is to assist the Permittee in the development and implementation of their Storm Water Program so that it prioritizes the milestones, strategies, and actions based on the PWQCs identified. The Permittee shall develop a Storm Water Management Plan (SWMP) describing their Storm Water Management Program consistent with the Pollutant Prioritization approach described below.

J.1.General Responsibilities

The Permittee shall include the following program elements in their SWMP and identify how each element will be implemented to address the Priority Water Quality Constituents. (PWQCs) Although the level of effort may be different for each program element depending on the PWQCs, each program element shall be implemented by the Permittee.

J.2.Storm Water Management Plan

A. Storm Water Management Plan (SWMP)

The Permittee shall include the following elements in its SWMP:

1. Jurisdictional Runoff Area Map, which shall include the following, as applicable:
 - a. MS4 permit boundary;
 - b. County boundary(ies);
 - c. Urban boundary;
 - d. City boundary(ies);
 - e. Boundaries of other Phase I and II MS4s, if applicable;
 - f. Main arterial streets and highways;
 - g. Water bodies receiving MS4 discharges, including CWA section 303(d) impaired water bodies or water body segments; and
 - h. MS4 outfalls.
2. Assessment and prioritization methodologies, including criteria relied on to identify WQCs and PWQCs;
3. Monitoring and assessment program meeting the requirements of **Part V**;
4. Description of the Permittee's Storm Water Management Program, including specific strategies and activities for addressing PWQCs, program management, and program elements required under this Order;
5. General schedule for implementation of identified strategies and activities;
6. Other required plans and analyses under this Order, including but not limited to RAAs;

7. Effectiveness assessment and reporting methodology used to demonstrate its Storm Water Management Program, as described in its SWMP, is achieving established milestones and successfully implementing strategies and activities; and
8. Adaptive management methodology used to incorporate the iterative approach and improve its Storm Water Management Program.

J.3. Program Management

A. Legal Authority

1. The Permittee shall review, revise, maintain, and enforce adequate legal authority to control pollutant discharges into their MS4 through ordinance, statute, permit, contract, or similar means (40 CFR 122.26(d)(2)(i)). This program element may include the following: control of contributing pollutants in discharges associated with industrial and construction sites, effective prohibition of identified illicit discharges, prohibition and elimination of illegal connections, and requirement of BMPs to prevent or reduce the discharge of pollutants from MS4s to the MEP.
2. **Enforcement Response Procedures.** This Order requires the Permittee to develop and implement enforcement response procedures. A description of the enforcement response procedures shall be included with the Permittee's SWMP. The SWMP shall describe the applicable approaches and options to enforce its legal authority, as necessary, to achieve compliance with the requirements of this Order. The Permittee shall develop enforcement response procedures that include the following at a minimum:

a. Enforcement Response Approaches and Options

The SWMP shall describe the enforcement response approaches that the Permittee will implement to compel compliance with its statutes, ordinances, permits, contracts, orders, or similar means, and the requirements of this Order. The description shall include the protocols for implementing progressively stricter enforcement responses. The enforcement response approaches shall include appropriate sanctions to compel compliance, including, the following tools as applicable:

- i. Verbal and written notices of violation;
- ii. Referral to Water Board for enforcement;
- iii. Fines;
- iv. Bonding requirements;
- v. Administrative and criminal penalties;
- vi. Liens;

- vii. Stop work orders; and
- viii. Permit and occupancy denials.

3. Correction of Violations

- a. The Permittees shall ensure that violations are corrected in a timely manner with the goal of correcting the violations within thirty (30) calendar days after the violations are discovered, or prior to the next predicted rain event, whichever is sooner.
- b. If more than thirty (30) calendar days are required to achieve compliance, then a rationale shall be recorded in the applicable electronic database or tabular system used to track violations.

4. Progressive Enforcement

- a. The enforcement response procedures shall include a definition of “progressive enforcement.” The progressive enforcement approach shall, at a minimum, consider the environmental harm (including the violation of water quality standards) that has occurred as a result of the discharge. Additional considerations for enforcement may include event duration, event frequency, and the cooperation and intent of the responsible party. Progressive enforcement may be defined differently for development planning, construction sites, commercial facilities or areas, industrial facilities, municipal facilities, and/or residential areas.
- b. Where the Permittee determines progressive enforcement is required, a rationale shall be recorded in the applicable electronic database or tabular system used to track violations.
- c. Progressive enforcement actions shall continue to increase in severity, as necessary, to compel compliance as soon as possible.

5. Reporting of Non-Compliant Sites

- a. The Permittee shall notify the Central Valley Water Board of non-filers under the Industrial General Permit and Construction General Permit (CGP) within one month of that determination, or [file a complaint](https://calepa.ca.gov/enforcement/complaints/) at: (<https://calepa.ca.gov/enforcement/complaints/>).
- b. In making such referrals, at a minimum include the following documentation:
 - i. Construction project or industrial facility location;
 - ii. Name or owner or operator;

- iii. Estimated construction project size or type of industrial activity;
and
- iv. Records of communication with owner or operator regarding filing requirements.

B. Fiscal Analysis

The Permittee shall secure the resources necessary to meet the requirements of this Order and shall prepare a fiscal analysis to be submitted as part of the Mid-Term and End-Term Reports. This summary shall, for each fiscal year covered by the report, identify the expenditures spent on the implementation of the SWMP. Such summary shall include a description of the source(s) of funds that were used or are proposed to be used to meet the necessary expenditures, including legal restrictions on the use of such funds.

J.4. Program Elements

The Permittee shall develop and implement the following program elements, as applicable, so that they effectively address the PWQCs:

A. Illegal Connection and Illicit Discharge Elimination Program

1. The Permittee shall implement an Illegal Connection and Illicit Discharge Elimination Program to actively seek and eliminate illicit discharges and illegal connections, if any in the Jurisdictional Runoff Area. This program element may include the following: detection of illicit discharges and illegal connections, investigation/inspection and follow-up procedures designed to eliminate these sources, enforcement of local codes and ordinances, public education and training.
2. **Spill Response Procedures.** The Permittee shall develop and implement spill response procedures for all sanitary sewer overflows (SSO) and other spills that may discharge into its MS4. The spill response procedures shall clearly identify the agencies responsible for spill response and cleanup, telephone numbers and e-mail address for contacts, and shall contain at a minimum the following requirements:
 - a. Coordination with spill response teams throughout all appropriate departments, programs and/or applicable agencies so that maximum water quality protection is provided.
 - b. Initiate investigation of all public and employee spill complaints within three (3) business day of receiving the complaint to assess validity of the complaint.

- c. Spills that may endanger human health or the environment shall be reported to appropriate public health agencies and the Office of Emergency Services (OES) as soon as possible.
- d. The spill response procedures shall be evaluated at least once during the permit term to determine whether changes or updates are needed to ensure that the spill response procedures are accurately addressed and contact information is correct and current. Any identified changes shall be made to the procedures subsequent to the evaluation.

B. Construction Storm Water Runoff Control Program

The Permittee shall implement the Construction Storm Water Runoff Control Program to reduce pollutants in runoff from construction sites, if any, in the Jurisdictional Runoff Area during all construction phases. This program element may include the following: project approval process, site inventory and tracking, inspection/outreach, enforcement of local codes and ordinances, and training.

C. Industrial/Commercial Storm Water Runoff Control Program

The Permittee shall develop and implement the Industrial/Commercial Storm Water Runoff Control Program to reduce pollutants in runoff from industrial/commercial sites, if any, within the Jurisdictional Runoff Area. This program element may include the following: high priority facility inventory and tracking, inspection/outreach, enforcement of local codes and ordinances and training.

D. Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping)

The Permittee shall develop and implement the Municipal Operations Storm Water Runoff Control Program (Pollution Prevention/Good Housekeeping) to effectively prohibit non-storm water discharges to the MS4 and reduce PWQCs in runoff from municipal land use areas, facilities, and activities, if any, within the Jurisdictional Runoff Area. This program element may include the following: pollution prevention at Permittee-owned or operated facilities, storm drain system maintenance, street cleaning and maintenance and training.

E. Public Involvement and Participation Program

The Permittee shall implement the Public Involvement and Participation Outreach Program to educate the public and encourage participation in the implementation of the Storm Water Management Program as described in its SWMP. This program element includes outreach to involve, engage and educate the public.

F.Planning and Land Development/Post Construction Storm Water Management Program

The Permittee shall develop and implement the Planning and Land Development/Post Construction program to minimize the short- and long-term impacts on receiving water quality from new development and redevelopment.

1. Objectives

The objectives of the Planning and Land Development program are to:

- a. Incorporate water quality and watershed protection principles into the Permittee's policies, planning procedures (e.g., General Plan, CEQA analyses, planning/entitlement processes, etc.) and development permit approval process;**
- b. Develop (as needed) and implement planning and land development standards;**
- c. Ensure that post-construction storm water quality controls are required and properly selected during the development approval process to minimize storm water quality impacts to the MEP for both private priority development projects and Permittee-owned development projects;**
- d. Ensure that post-construction storm water quality controls are selected based on project- and site-specific conditions and land use characteristics, as well as receiving water impacts;**
- e. Ensure that selected post-construction storm water quality controls will remain effective upon project completion by requiring appropriate maintenance provisions and/or agreements and/or establishment of a maintenance district for all priority development projects;**
- f. Develop and/or maintain a tracking system to track the ownership and maintenance history of selected post-construction storm water quality controls to ensure adequate long-term maintenance; and**
- g. Provide regular internal training to key staff on applicable components of the Planning and Land Development program.**

2. Components

The Permittee shall review, update as needed, and continue to implement its Planning and Land Development program. Any new or updated Planning and Land Development Program components shall be included

with the SWMP. The Planning and Land Development/Post Construction¹⁴⁰ program shall incorporate the following components:

a. Priority Development Projects¹⁴¹

The Permittee shall define the criteria and thresholds for the Priority Development Projects that will be subject to the requirements specified as a part of this program. A Permittee may propose criteria that differ from those listed in the definition of “Priority Development Project” in **Attachment C** as long as its SWMP demonstrates that the criteria are designed to achieve equivalent protection of water quality that would be achieved by the criteria listed in **Attachment C**. If a Permittee has already received prior board approval of alternate criteria for defining Priority Development Projects, the Permittee’s SWMP need only reference the Central Valley Water Board order providing such approval, or else append a copy of the board decision approving the alternate criteria to the SWMP. However, the Executive Officer retains the discretion to require a Permittee to revisit and justify either its existing criteria or revised criteria.

In addition, the Permittee shall develop policies (as needed) to define and promote preferred types of development (infill, redevelopment). These policies may include less stringent criteria for preferred priority projects.

b. Site Design Measures

Each Permittee shall require priority new development and redevelopment projects to assess the possibility of integrating Site Design strategies. Site Design is a storm water management strategy that emphasizes conservation and use of existing natural site features integrated with distributed, small-scale storm water controls to more closely mimic natural hydrologic patterns in residential, commercial, and industrial settings.

¹⁴⁰ *Post-Construction Performance Standards & Water Quality-Based Requirements, A Compendium of Permitting Approaches, Municipal Separate Storm Sewer System Permits*, EPA 833-R-14-003, USEPA, June 2014.

¹⁴¹ For categories of priority development projects, see the definition in **Attachment C (Acronyms, Abbreviations, and Definitions)** which is based on State Water Board Order WQ-2000-11, approved on 5 October 2000 and State Water Board Memorandum dated 26 December 2000 pertaining to the decision in State Water Board Order WQ-2000-11 to use Standard Urban Storm Water Mitigation Plans (SUSMPs) in Phase I MS45 Permits.

c. Source Control Measures

The Permittee shall develop strategies that control the sources of pollutants or constituents (i.e., the point where water initially meets the ground) to minimize the transport of urban runoff and pollutants offsite and into the Permittee MS4. Source controls are intended to keep pollutants from mixing with runoff. All development projects shall require permanent markers discouraging dumping to be applied to storm drain inlets. In addition, source control measures shall be required for the following areas:

- i. Fueling areas
- ii. Loading areas
- iii. Outdoor material storage areas
- iv. Outdoor work areas (e.g., processing, manufacturing)
- v. Vehicle and equipment wash areas
- vi. Waste management areas (garbage, recycling, restaurant food waste)

The Permittee's development standards shall require new development and redevelopment projects to incorporate applicable source controls.

J.5.Treatment Control Measures

- A.** The Permittee shall require Priority Development Projects to assess the feasibility and necessity of incorporating treatment control measures. Storm water quality treatment control measures are engineered technologies designed to remove pollutants from site runoff. Treatment control measures may include, but are not limited to: bioretention planters, vegetated filter strips and swales, infiltration trenches and basins, sand filters, detention basins and select proprietary devices.
- B.** The Permittee's development standards shall require Priority Development Projects to incorporate treatment control measures as needed and feasible. The Permittee shall also consider that the required treatment volume or flow can be reduced or met through the use of LID measures.

J.6.Numeric Sizing Criteria

- A.** Where utilized, the Permittee shall require the implementation of storm water quality treatment control measures and applicable LID strategies to be designed to treat either the water quality flow (WQF) or water quality volume (WQV) as follows:

B. WQF-based measures shall be designed to treat:

1. The maximum (peak) flow rate of runoff produced by the 85th percentile hourly precipitation intensity, as determined from the historical rainfall record, multiplied by a factor of two; or
2. The maximum flow rate of runoff as determined from local historical rainfall records, that achieves approximately the same reduction in pollutant loads and flows as achieved by mitigation of the 85th percentile hourly rainfall intensity multiplied by a factor of two; or
3. The Permittee justified maximum flow rate (submitted as a part of the SWMP) that achieves approximately the same reduction in pollutant loads and flows as achieved by mitigation of the 85th percentile hourly rainfall intensity multiplied by a factor of two.

C. WQV-based measures shall be designed to capture and treat either:

1. The volume of runoff produced by the 85th percentile, 24-hour rainfall event, determined as the maximized capture storm water volume for that area, using the formula and volume capture coefficients set forth in *Urban Runoff Quality Management (WEF Manual of Practice No. 23/ASCE Manual of Practice No. 87, (1998), pages 175-178)* or equivalent method; or
 - a. The volume of runoff produced from a 85th percentile, 24-hour storm event, as determined for the local the historical rainfall record; or
 - b. The volume of annual runoff based on unit basin storage volume to achieve eighty (80) percent or more of the volume treatment by the methodology set forth in Appendix D of the *California Storm Water Best Management Practices Handbook* (Stormwater Quality Task Force, 1993); or
 - c. The Permittee justified design storm volume (submitted as a part of the SWMP). The treatment of this volume shall achieve approximately the same reduction in pollutant loads achieved by treatment of the 85th percentile, 24-hour storm event.

D. Selected sizing criteria shall be described in the SWMP. Storm flows above these values shall be considered compliant with the Order as the levels of dilution available in such flows reduce concentrations accordingly.

J.7. Infiltration BMPs

The Permittee shall consider the type of development and resulting storm water discharge and, if appropriate, consider the use of structural BMPs that are designed to primarily function as infiltration devices (e.g., infiltration trenches, infiltration

basins, bioretention planters, porous pavement, dry wells¹⁴²) so long as the devices will not adversely impact groundwater quality. These restrictions and when they should be applied shall be described in the Permittee's Development Standards.

J.8.Maintenance Agreement and Transfers

The Permittee shall require Priority Development Projects to ensure selected post-construction storm water quality controls will remain effective upon project completion by requiring legal agreements, covenants, or CEQA mitigation requirements, and/or conditional use permits.

J.9.Low Impact Development Strategies

The Permittee shall require Priority Development Projects to assess the possibility of integrating Low Impact Development (LID) strategies. LID is a storm water management strategy that emphasizes conservation and use of existing natural site features integrated with distributed, small-scale storm water controls to more closely mimic natural hydrologic patterns in residential, commercial, and industrial settings. LID employs a variety of natural and structural features that reduce the rate of runoff, filter out its pollutants, and facilitate the infiltration of water into the ground. Furthermore, Senate Bill 985 and the State Water Resources Control Board's Storm Water Strategy encourage the use of storm water as a resource to augment water supply.

LID measures may include but are not limited to: stream setbacks and buffers, soil amendments, tree planting and preservation, rooftop and impervious area disconnection, porous pavement, eco roofs, bioretention planters, and rain barrels or cisterns. The Permittee's development standards shall require Priority Development Projects to integrate LID strategies where feasible to do so.¹⁴³ This Order encourages the Permittees to develop storm water management programs that promote the use of storm water as a resource.

This Order requires the Permittee to incorporate Low Impact Development into the Planning and Land Development Program.

J.10. Hydromodification Management Plan

- A.** The Permittees shall require Priority Development Projects, not otherwise exempted, that will discharge into natural drainage systems, to implement hydrologic control measures to prevent accelerated downstream erosion and to protect stream habitat.

¹⁴² The Regional and/or State Boards are in the process of developing guidelines specific to the design and siting of dry wells that should be followed when established.

¹⁴³ The [California Phase II LID Sizing Tool](http://owp-web1.saclink.csus.edu/LIDTool/Start.aspx), a web-based tool, may assist Permittees in the selection and sizing of LID BMPs. (<http://owp-web1.saclink.csus.edu/LIDTool/Start.aspx>)

- B.** This Order requires the Permittees to develop and implement a Hydromodification Management Plan (HMP). The HMP shall include measures that manage the increases in the magnitude (e.g., flow control), frequency, volume and duration of runoff from development projects in the range of flows to control to protect natural drainage systems from increased potential for erosion. The HMP may include one (or more) of the following management strategies:
1. Erosion Potential: Hydromodification control in natural drainage systems shall be achieved by maintaining the Erosion Potential (Ep) in streams at a value of approximately 1, unless an alternative value can be shown to be protective of the natural drainage systems from erosion, incision, and sedimentation that can occur as a result of flow increases from impervious surfaces and prevent damage to stream habitat in natural drainage system tributaries (**Attachment I, Determination of Erosion Potential**).
 2. Flow Duration Control: post-project runoff shall not exceed estimated pre- project rates and/ or durations (At least 90% of the flows must not have discharge frequencies (% of time) that exceed the pre-project discharge frequencies in the range of flows to control. Those flows that have frequencies that exceed pre-project discharge frequencies may not exceed it by more than 10%.) where the increased storm water discharge rates and/or durations will result in increased potential for erosion.
 3. Other equivalent design criteria that is equally protective of natural drainage systems. This method will be subject to approval by the Executive Officer.
- C.** Natural drainage systems that are subject to the hydromodification assessments and controls include all drainages that have not been improved (e.g., channelized or armored with concrete, shotcrete, or rip-rap) or drainage systems that are tributary to a natural drainage system, except as provided below (Exemptions to Hydromodification Controls). The clearing or dredging of a natural drainage system does not constitute an “improvement.”
1. Exemptions to Hydromodification Controls: The Permittees may exempt the following Priority Development Projects from implementation of hydromodification controls where assessments of downstream channel conditions and proposed discharge hydrology indicate that adverse hydromodification effects to beneficial uses of natural drainage systems are unlikely:

- a. Projects that are replacement, maintenance or repair of the Permittees' existing flood control facilities, storm drains, public utilities, or transportation network.
 - b. Redevelopment Projects (e.g., infill) that do not increase the effective impervious area or decrease the infiltration capacity of pervious areas compared to the pre-project conditions.
 - c. Construction of infill projects in highly developed watersheds, where the potential for single-project and/or cumulative impacts is minimal.
 - d. Projects that have any increased discharge directly or via a storm drain to a sump, drainage pump station, lake, area under tidal influence, or into a waterway (e.g., perennial river) that is not susceptible to hydromodification impacts.
 - e. Projects that discharge directly or via a storm drain into concrete or otherwise engineered (not natural) channels (e.g., channelized or armored with rip rap, shotcrete, concrete lined, etc.), which, in turn, discharge into a receiving water that is not susceptible to hydromodification impacts.
- D.** Hydromodification controls may include one, or a combination of onsite, regional or sub-regional hydromodification control measures, LID strategies, or stream and riparian buffer restoration measures. Any in-stream restoration measure shall not adversely affect the beneficial uses of the natural drainage systems. LID BMPs implemented on single family homes are sufficient to comply with Hydromodification criteria.
- E.** The HMP shall be developed no later than 1-year after the approval of the SWMP by the Regional Board. If a Permittee or group of Permittees has already developed, or is in the process of developing, a HMP, they may assess the HMP and the method in which it was developed to determine what modifications (if any) are necessary to comply with this provision.
- F.** The Permittees' development standards shall require Priority Development Projects to integrate hydromodification strategies, as needed. LID strategies and treatment controls may simultaneously address the hydromodification management requirements.

J.11. Technical Guidance

- A.** The Permittee shall develop and maintain a Technical Guidance manual of development standards consistent with the requirements of the provisions in this program element.

- B.** The Technical Guidance shall include site design measures, source controls, treatment controls, LID, hydromodification, and erosion and sediment control strategies, if not already included in other applicable technical guidance.
- C.** The schedule for development, modification and implementation of the Technical Guidance manual shall be included in the Permittee's SWMP. The Permittee may adopt existing technical guidance manuals/standards to assist in meeting the intent of this Order.

J.12. Mitigation Funding

The Permittee may propose a management framework, for endorsement by the Executive Officer, to support regional or sub-regional solutions to storm water pollution, where any of the following situations occur:

1. A waiver for impracticability is granted;
2. Legislative funds become available;
3. Off-site mitigation is required because of loss of environmental habitat; or
4. An approved watershed management plan or a regional storm water mitigation plan exists that incorporates an equivalent or improved strategy for storm water mitigation.

J.13. Regional Storm Water Mitigation

The Permittee may propose an existing or new regional or sub-regional storm water mitigation program as a part of the SWMP to substitute completely or in part for the development standards requirements. The Executive Officer may approve such a program if the Permittee can demonstrate that its implementation will:

1. Result in equivalent or improved storm water quality;
2. Protect stream habitat;
3. Promote cooperative problem solving by diverse interests;
4. Be fiscally sustainable and have secure funding;
5. Be completed in five years, or as soon as possible if an extraordinarily large or phased in projects, including the construction and start-up of treatment facilities.

J.14. Alternative Compliance Program to Onsite LID and Hydromodification Implementation

At the discretion of the Permittee, Priority Development Projects may be allowed to participate in an alternative compliance program in lieu of requiring the

implementation of LID and hydromodification measures onsite.¹⁴⁴ The alternative compliance program is available to a Priority Development Project only if the Priority Development Project applicant enters into a voluntary agreement with the Permittee authorizing this arrangement. In addition to the voluntary agreement, relief from implementing LID and hydromodification measures onsite may be authorized by the Permittee under the following conditions for candidate projects:

1. The Priority Development Project applicant agrees to fund, contribute funds to, or implement a candidate project;
2. The Permittee shall determine that implementation of the candidate project will have an equal or greater overall water quality benefit than requiring implementation of LID and hydromodification measures onsite;
3. If the Priority Development Project applicant chooses to fully or partially fund a candidate project, then the Permittee shall ensure that the funds to be obtained from the Priority Development Project applicant are sufficient to mitigate for impacts caused by not fully implementing LID and hydromodification measures onsite;
4. The voluntary agreement to fund, partially fund, or implement a candidate project shall include reliable sources of funding and a plan for operation and maintenance of the candidate project. Reliable sources of funding may include escrow accounts, bonds, letters of credit, or other such mechanisms;
5. Design of the candidate project shall be conducted under an appropriately qualified engineer, geologist, architect, landscape architect, or other professional, licenses where applicable, and competent and proficient in the fields pertinent to the candidate project design;
6. The candidate project shall be constructed as soon as possible, but no later than four (4) years after the certificate of occupancy is granted for the first Priority Development Project that contributed funds toward the construction of the candidate project, unless a longer period of time is authorized by the Executive Officer; and
7. If the candidate project is constructed after the Priority Development Project is constructed, the Permittee shall require temporal mitigation for pollutant loads and altered flows that are discharged from the Priority Development Project.

¹⁴⁴ Such as the [National Fish and Wildlife Foundation's In-Lieu Fee Program](https://www.nfwf.org/mitigating-impacts/sacramento-district-california-lieu-fee-program) or other similar mitigation bank that provides a mitigation option alternative. (<https://www.nfwf.org/mitigating-impacts/sacramento-district-california-lieu-fee-program>)

J.15. Alternative Compliance In-Lieu Fee Structure

- A.** If the Permittee chooses to allow a Priority Development Project applicant to fund or partially fund a candidate project or an alternative compliance project, then the Permittee shall develop and implement an in-lieu fee structure. This may be developed individually or with other Permittees and/or entities, as a means for designing, developing, constructing, operating, and maintaining offsite alternative compliance projects.
- B.** The in-lieu fee shall be transferred to the Permittee (for public projects) or an escrow account (for private projects) prior to the construction of the Priority Development Project. Any in-lieu fee structure that the Permittee chooses to implement shall be submitted to the Central Valley Water Board for review and acceptance as part of the SWMP.

J.16. Alternative Compliance Water Quality Credit System Option

- A.** The Permittee may develop and implement an alternative compliance water quality credit system option, individually or with other Permittees and/or entities, provided that such a credit system clearly exhibits that it will not allow discharges from Priority Development Projects to cause or contribute to a net impact over and above the impact caused by projects meeting the onsite LID and hydromodification implementation requirements.
- B.** Any credit system that the Permittee chooses to implement shall be submitted to the Central Valley Water Board for review and approval as part of the SWMP.

J.17. Retrofitting and Rehabilitation

A. Retrofitting Areas of Existing Development

The Permittee should develop a planning process that will incorporate consideration of storm water retrofit projects¹⁴⁵ to address existing development that are identified as significant contributors of PWQCs. The planning process should consider the following:

- 1.** A storm water retrofit strategy that corrects prior design or performance deficiencies; disconnects impervious areas; storm water capture¹⁴⁶ to

¹⁴⁵ Schuler, T., Hirschmann, D., Novotney, M., and J. Zilinski. *Urban Watershed Restoration Manual No. 3: Urban Stormwater Retrofit Practices*, [Center for Watershed Protection, prepared for Office of Wastewater Management, USEPA, July 2007](https://owl.cwp.org/mdocs-posts/urban-subwatershed-restoration-manual-series-manual-3/), (<https://owl.cwp.org/mdocs-posts/urban-subwatershed-restoration-manual-series-manual-3/>).

¹⁴⁶ *Stormwater Capture Potential in Urban and Suburban California*, Issue Brief, Natural Resources Defense Council, June 2014.

mitigate drought conditions, improves groundwater recharge and/or infiltration performance; addresses PWQCs; demonstrates new technologies; and/or supports stream restoration activities;

2. Develop an inventory of potential retrofit projects;
3. Establish a prioritization strategy to rank each project considering;
 - a. PWQCs;
 - b. Potential pollutant removal and drainage area affected;
 - c. Stream channel protection capability;
 - d. Design, construction, inspection, and maintenance costs of facility, considering the applicability of storage or on-site retrofits;
 - e. Ability to implement the project;
 - f. Potential for cumulative benefit; and
 - g. Infiltration capacity of the subsurface.

B. Stream, Channel, and/or Habitat Restoration in Areas of Existing Development

The Permittee should develop a planning process to evaluate opportunities for rehabilitation projects in areas of existing development. The planning process should consider:

1. Identify a rehabilitation strategy that addresses storm water runoff flows and durations that cause or contribute to hydromodification in receiving waters; rehabilitates channelized or hydromodified streams; restores wetlands and/or riparian habitats; restores watershed functions; and/or restores beneficial uses of receiving waters;
2. Develop an inventory of potential rehabilitation projects;
3. Establish a prioritization strategy to rank each project considering;
 - a. PWQCs;
 - b. Potential pollutant removal and drainage area affected;
 - c. Bank stabilization capability;
 - d. Design, construction, inspection, and maintenance costs, considering the applicability of storage or on-site retrofits;
 - e. Ability to implement the project; and
 - f. Potential for cumulative benefit.

J.18. Coordination, Enforcement and Tracking

- A. The Permittee shall provide for the review of proposed project plans and require measures to ensure that all applicable Priority Development Projects

will be in compliance with their storm water ordinances and development standards.

- B.** The Permittee shall develop a process by which development standards will be implemented and include that process within the SWMP. The process shall identify at what point in the planning process development projects will be required to meet development standards. The process shall also include identification of the roles and responsibilities of various municipal departments, as applicable, in implementing the development standards, as well as any other measures necessary for the implementation of development standards.
- C.** The Permittee shall develop a GIS or other electronic system for tracking projects that have been issued a permit for the construction of post-construction treatment control BMPs, including ownership information and responsibility and maintenance information and history.

J.19. Planning and Land Development Program Education and Training

- A.** The Permittee shall develop and implement a training program for key municipal staff and/or agency contracted staff involved in implementing the Planning and Land Development Program as specified in this Order.
- B.** The Permittee shall train municipal staff and/or agency contracted staff on how to incorporate low impact development, hydromodification, and other techniques into private and public projects.
- C.** All new hires whose jobs include implementation of Planning and Land Development Program shall receive this training within the first year of their hire date.
- D.** The training program shall include the following:
 - 1.** A focus on general storm water education, new methods or technologies, application of permit requirements and responsibilities, and the permit requirements that apply to the staff being trained.
 - 2.** Guidance on appropriate BMPs to apply to private and public projects.
 - 3.** An assessment of trained staff and contracted staff's knowledge of the Planning and Land Development Program.
 - 4.** Revisions to the training as needed.

J.20. Monitoring Requirements

A. Purpose

The monitoring program provides a framework for the adaptive management of the Permittee's storm water program. Each Permittee shall document their approach for complying with the monitoring program requirements in the SWMP and provide a detailed implementation schedule as a part of the Work Plan. For the purposes of this section, monitoring includes the collection of both programmatic and water quality data and information.

The primary objectives of the monitoring program may include, but are not limited to:

1. Assessing compliance with this Order;
2. Assessing the overall health of receiving waters and evaluating long-term trends in receiving water quality;
3. Characterizing urban runoff and evaluating the long-term trends;
4. Assessing the impacts on receiving waters resulting from urban runoff;
5. Identifying the likely sources of pollutants and PWQCs;
6. Assessing the effectiveness of specific storm water quality controls and/or management actions;
7. Supports the development of water quality models and/or other data assessment tools; and/or
8. Identifying modifications to improve the effectiveness of the SWMP.

Ultimately, the goal of the monitoring program is to inform the Permittee, to the extent feasible, about the nexus between the implementation of the storm water program, the quality of the discharges from the MS4, and the resulting impact, if any, on the receiving water. This goal shall be accomplished through monitoring, assessing, and reporting the conditions of the receiving waters, discharges from the MS4, pollutant sources, and the effectiveness of the water quality improvement strategies implemented as part of the SWMP and Work Plan.

B. Monitoring Study Design and Implementation Schedule

The Permittees shall include a Monitoring Study Design and Implementation Schedule with its SWMP that complies with the monitoring requirements provided in **Attachment G** (*Specific Provisions for Total Maximum Daily*

*Loads Applicable to Order R5-2026-0XXX) and **Attachment H** (Standard Permit Provisions and General Provisions) and address the following:*

1. Monitoring Approach

The SWMP shall specify the monitoring approach selected including a narrative summary outlining the rationale for selecting the approach. The monitoring approach shall include a periodic re-evaluation of constituents of concern in storm water (e.g. heavy metals, bacterial indicators, and current-use pesticides).

2. Monitoring Parameters, Types, and Methods

The SWMP shall specify:

- a. The parameters being sampled;
- b. Field and laboratory methods, including Reporting Limits, Method Detection Limits, and Minimum Levels¹⁴⁷ Reporting limits must be consistent with **Table E1 (Attachment E Monitoring Requirements)** unless alternate reporting limits are included in the approved SWMP.
- c. Sampling types and frequencies.

3. Monitoring Locations

The SWMP shall include the following to specify monitoring site locations:

- a. Justification for each monitoring/sampling location chosen.
- b. A map showing the following:
 - i. Surface water bodies within the Jurisdictional Runoff Area, including those that are CWA section 303(d) listed or where a TMDL has been developed;
 - ii. Identification of MS4 outfalls that discharge to surface water bodies located within the Jurisdictional Runoff Area;
 - iii. The location of monitoring/sampling locations within the Jurisdictional Runoff Area with station identification numbers and descriptions.

¹⁴⁷ For priority pollutants, MLs shall be used for all analyses, unless otherwise specified. Reporting Levels (RL) must be lower than or equal to the ML value. If a particular ML is not attainable in accordance with procedures set forth in 40 CFR 136, the lowest quantifiable concentration of the lowest calibration standard analyzed by a specific analytical procedure may be used instead.

4. Quality Assurance/Quality Control

- a.** The SWMP shall include a Quality Assurance Project Plan (QAPP), in accordance with the quality assurance/quality control (QA/QC) and other protocols (e.g., Standard Operating Procedures for bioassessment) established by the Surface Water Ambient Monitoring Program (SWAMP).
- b.** All samples shall be collected and analyzed in accordance with the methods specified in 40 CFR Part 136. Field testing, sample collection, preservation, laboratory testing, including quality control procedures and all record keeping shall comply with the most current version of the [SWAMP QAPP](https://www.waterboards.ca.gov/water_issues/programs/swamp/quality_assurance.html) (https://www.waterboards.ca.gov/water_issues/programs/swamp/quality_assurance.html)

[formatted Microsoft Word document](https://www.waterboards.ca.gov/water_issues/programs/swamp/quality_assurance.html) is also available at (https://www.waterboards.ca.gov/water_issues/programs/swamp/quality_assurance.html).

5. Local Water Quality Monitoring

Depending on the status of the current MS4 monitoring program (how long the monitoring program has been in place, what assessments have already been conducted, and the available data), the monitoring program described in the SWMP may include one or more of the following:

- a.** Receiving water monitoring
 - i.** Characterize and/or identify trends in receiving water conditions;
 - ii.** Identify water quality constituents of concern that are adversely impacting the beneficial uses of receiving waters and persistently exceeding water quality objectives;
- b.** Source characterization
 - i.** Identify and quantify (to the extent feasible) the likely sources of the water quality constituents of concern (e.g. pesticide applications, littering industrial facilities, atmospheric deposition, legacy pollutants, etc.) that may adversely affect the ability to meet applicable water quality objectives or impair the beneficial uses of the receiving waters;
- c.** Urban discharge monitoring
 - i.** Characterize and/or identify relevant trends in discharges from MS4 outfalls;

- ii. Identify pollutants from urban runoff that may cause water quality objective exceedances or adversely affect the beneficial uses of the receiving waters; and
 - d. Special studies
 - i. Evaluate the effectiveness of BMPs including, to the extent possible, quantifying the reductions of pollutants from the BMP, the reductions of pollutants in the outfall discharges, and/or the reductions of pollutants in the receiving waters that are attributable to the BMP(s).
 - e. TMDL monitoring
 - i. Each Permittee that is assigned a waste load allocation or identified as a responsible party in a TMDL approved by the U.S. EPA where urban runoff is listed as a source, shall comply with the corresponding TMDL implementation plan. To the extent that the TMDL implementation plan includes monitoring, these requirements must be addressed in the SWMP.
 - ii. The Permittees shall submit any collected monitoring data during the previous reporting year (July 1 through June 30) with each Annual Report.
 - iii. Collected monitoring data shall be uploaded to the California Environmental Data Exchange Network (CEDEN), or the Storm Water Multi-Application Reporting and Tracking System (commonly known as SMARTS) database when available. Data must be uploaded to CEDEN using the templates provided on the CEDEN website.
- 1. Toxicity Monitoring

If the Permittee conducts toxicity monitoring, toxicity monitoring shall be implemented as specified in **Attachment E**.
- 2. Regional Monitoring Program

If directed by the Executive Officer (see **Part 8**, below) or requested by the Permittee (and approved by the Executive Officer) the Permittee shall participate in a regional monitoring program (RMP) to address all or part of the local water quality monitoring requirements of this Order.

 - a. Permittees that participate in a RMP may request a reduction in some of the local water quality monitoring specified in the monitoring requirements of this Order. Participation in a RMP by a Permittee shall

consist of providing funds and/or in-kind services to the RMP at least equivalent to discontinued individual monitoring and study efforts.

- b.** If the Permittee proposes to reduce the local water quality monitoring in exchange for participation in a RMP, the Permittee shall submit a letter signed by an authorized representative to the Central Valley Water Board Executive Officer requesting to participate in a RMP, the date on which local water quality monitoring required under the monitoring requirements for this Order, would cease, or be modified, and specific monitoring locations and constituent combinations that would no longer be conducted individually. To ensure consistency with this Order, reductions in local water quality monitoring require the Executive Officer's prior written approval of the Permittee's request, including related SWMP modifications. Approval by the Executive Officer is not required prior to participating in the RMP, if the Permittee is not requesting reductions in local water quality monitoring.
- c.** If the Permittee is approved to participate in a RMP and reduce some local water quality monitoring, the Permittee shall continue to participate in a RMP until such time as the Permittee informs the Central Valley Water Board Executive Officer that participation in a RMP will cease and all local water quality monitoring will be reinstituted. To the extent approved by the Executive Officer, some local water quality monitoring and related monitoring identified in the SWMP, required under this Order may be discontinued so long as the Permittee adequately supports a RMP. If the Permittee fails to maintain adequate participation in a RMP by not providing funds and/or in-kind services, the Permittee shall reinstitute all previously required individual local water quality monitoring. During participation in the RMP, the Permittee shall conduct and submit any or part of the monitoring included in these monitoring requirements described in this Order that is deemed appropriate by the Permittee, provided the modified monitoring program approved by the Executive Officer is conducted at a minimum.
- d.** RMP data is not intended to be used directly to represent receiving water quality for purposes of determining if a discharge is causing or contributing to an exceedance of any applicable water quality standards. Thus, data from the RMP may be utilized as a preliminary step toward characterizing the receiving water. Alternatively, the Permittee may conduct any site-specific receiving water monitoring deemed appropriate by the Permittee and submit that monitoring data for characterization monitoring. RMP monitoring stations are established generally as "integrator sites" to evaluate the combined impacts on water quality of multiple sources; RMP monitoring stations would not normally be able to identify the source of any specific constituent but would be used to identify water quality issues needing

further evaluation. RMP monitoring data, along with local Permittee data, may be used to help establish ambient receiving water quality. In addition, RMP data, as with all environmental monitoring data, can provide an assessment of water quality at a specific location and time that can be used in conjunction with other information (i.e. other receiving water monitoring data, spatial and temporal distribution and trends of receiving water data, point and non-point source discharges, receiving water flow rate and velocity) to determine a potential source or sources of a constituent that contributed to an exceedance of any applicable water quality standards.

- e. During the period of participation in the RMP, the Permittee shall continue to report any individually conducted local water quality monitoring data in the Annual Report consistent with the monitoring requirements of this Order. In addition, with each submitted Annual Report, the Permittee shall include 1) a statement that the Permittee is participating in the RMP and have reduced some of the local water quality monitoring program required by the permit, and 2) the Permittee shall continue to attach a copy of the letter originally submitted to the Central Valley Water Board describing the monitoring location(s) and constituents that will no longer be sampled individually.

8. Delta Regional Monitoring Program

a. Permittees Within the Legal Delta Boundary

Permittees within the legal Delta boundary are required to maintain adequate participation in the Delta Regional Monitoring Program to address all or part of the local water quality monitoring requirements of this Order. Adequate participation in the Delta Regional Monitoring Program is determined by the program's steering committee. The Permittees shall maintain adequate participation in the Delta Regional Monitoring Program for the entire term of this Order. Permittees that maintain such adequate participation shall be deemed in compliance with the local water quality monitoring to the extent the Executive Officer has authorized Delta RMP participation to replace such monitoring.

b. Permittees Outside the Legal Delta Boundary

Permittees outside of the legal Delta boundary may be required to participate in the Delta Regional Monitoring Program or other regional monitoring program, as applicable, if directed and approved by the Executive Officer to address all or part of the local water quality monitoring requirements of this Order. Adequate participation in the Delta Regional Monitoring Program is determined by the program's

steering committee. Permittees that maintain such adequate participation shall be deemed in compliance with the local water quality monitoring to the extent the Executive Officer has authorized participation to replace such monitoring.

J.21. Trash Implementation

The Permittee shall implement the trash requirements in **Attachment N**.

J.22. Cost Reporting

The Permittee shall submit cost accounting information related to the implementation of this Order that complies with the State Water Board's Water Quality Control Policy to Standardize Cost Reporting in Municipal Stormwater Permits, adopted January 2025, or most recent version.

J.23. Asset Management

This Order encourages the Permittee to use effective asset management practices to implement their storm water program.

Attachment K – Prescriptive Requirements

If unsuccessful in complying with requirements described under the Pollutant Prioritization approach, **Attachment J** (*Pollutant Prioritization Approach Requirements*), as determined by the Executive Officer, the Permittee shall instead follow the Prescriptive approach described below.

GENERAL RESPONSIBILITIES

The Permittee shall include the following program elements in its SWMP and identify how each element will be implemented to address the PWQCs. Although the level of effort may be different for each program element depending on the PWQCs, each program element shall be implemented.

K.1. Program Management

A. Storm Water Management Plan (SWMP)

The Permittee shall include the following elements in its SWMP:

1. Jurisdictional Runoff Area Map, which shall include the following, as applicable:
 - a) MS4 permit boundary;
 - b) County boundary(ies);
 - c) Urban boundary;
 - d) City boundary(ies);
 - e) Boundaries of other Phase I and II MS4s, if applicable;
 - f) Main arterial streets and highways;
 - g) Water bodies receiving MS4 discharges, including CWA section 303(d) impaired water bodies or water body segments; and
 - h) MS4 outfalls.
2. Assessment and prioritization methodologies, including criteria relied on to identify WQCs and PWQCs;
3. Monitoring and assessment program meeting the requirements of Part **V**;
4. Description of the Permittee's Storm Water Management Program, including specific strategies and activities for addressing PWQCs, program management, and program elements required under this Order;
5. General schedule for implementation of identified strategies and activities;
6. Other required plans and analyses under this Order, including but not limited to RAAs;

7. Effectiveness assessment and reporting methodology used to demonstrate its Storm Water Management Program, as described in its SWMP, is achieving established goals and successfully implementing strategies and activities, including BMPs, interim milestones and final dates of achievement; and
8. Adaptive management methodology used to incorporate the iterative approach and improve its Storm Water Management Program.

B. Legal Authority

The Permittee shall review, revise, maintain, and enforce adequate legal authority to control pollutant discharges into their MS4 through ordinance, statute, permit, contract, or similar means (40 CFR 122.26(d)(2)(i)). This program element shall include the following: control of contributing pollutants in discharges associated with industrial and construction sites, effective prohibition of identified illegal discharges, prohibition and elimination of illegal connections, and requirement of BMPs to prevent or reduce the discharge of pollutants from MS4s to the MEP.

1. Enforcement Response Procedures

This Order requires the Permittee to develop and implement enforcement response procedures. A description of the enforcement response procedures shall be included with the Permittee's SWMP. The SWMP shall describe the applicable approaches and options to enforce its legal authority, as necessary, to achieve compliance with the requirements of this Order. The Permittee shall develop enforcement response procedures that include the following at a minimum:

a) Enforcement Response Procedure Components

The enforcement response procedures shall define the enforcement approach and options (below) for the following program elements:

- (1) Illegal Connection and Illicit Discharge Elimination Enforcement;
- (2) Construction Management Enforcement;
- (3) Existing Development Enforcement; and
- (4) Planning and Land Development Enforcement.

b) Enforcement Response Approaches and Options

The SWMP shall describe the enforcement response approaches that the Permittees will implement to compel compliance with its statutes, ordinances, permits, contracts, orders, or similar means, and the requirements of this Order. The description shall include the protocols for implementing progressively stricter enforcement responses. The enforcement response approaches shall include

appropriate sanctions to compel compliance, including, at a minimum, the following tools or their equivalent:

- (1) Verbal and written notices of violation;
- (2) Referral to Water Board for enforcement;
- (3) Fines;
- (4) Bonding requirements;
- (5) Administrative and criminal penalties;
- (6) Liens;
- (7) Stop work orders; and
- (8) Permit and occupancy denials.

c) Correction of Violations

- (1) The Permittee shall ensure that violations are corrected in a timely manner with the goal of correcting the violations within thirty (30) calendar days after the violations are discovered, or prior to the next predicted rain event, whichever is sooner.
- (2) If more than thirty (30) calendar days are required to achieve compliance, then a rationale shall be recorded in the applicable electronic database or tabular system used to track violations.

d) Progressive Enforcement

- (1) The enforcement response procedures shall include a definition of "progressive enforcement." The progressive enforcement approach shall, at a minimum, consider the environmental harm (including the violation of water quality standards) that has occurred as a result of the discharge. Additional considerations for enforcement may include event duration, event frequency, and the cooperation and intent of the responsible party. Progressive enforcement may be defined differently for development planning, construction sites, commercial facilities or areas, industrial facilities, municipal facilities, and/or residential areas.
- (2) Where the Permittee determines progressive enforcement is required, a rationale shall be recorded in the applicable electronic database or tabular system used to track violations.
- (3) Progressive enforcement actions shall continue to increase in severity, as necessary, to compel compliance as soon as possible.

e) Reporting of Non-Compliant Sites

- (1) The Permittee shall notify the Central Valley Water Board of non-filers under the Industrial General Permit and CGP within

one month of that determination, or [file a complaint on the State Water Board's website](#):

(<https://calepa.ca.gov/enforcement/complaints/>)

- (2) In making such referrals, at a minimum include the following documentation:
 - (a) Construction project or industrial facility location;
 - (b) Name or owner or operator;
 - (c) Estimated construction project size or type of industrial activity; and
 - (d) Records of communication with owner or operator regarding filing requirements.

c. Fiscal Analysis

The Permittee shall secure the resources necessary to meet the requirements of this Order and shall prepare a fiscal analysis to be submitted as part of the Mid-Term and End-Term Reports. This summary shall, for each fiscal year covered by the report, identify the expenditures spent on the implementation of the SWMP. Such summary shall include a description of the source(s) of funds that were used or are proposed to be used to meet the necessary expenditures, including legal restrictions on the use of such funds.

K.2. Program Elements

The Permittee shall implement the following program elements as described below:

- Illegal Connection and Illicit Discharge Elimination Program
- Construction Site Storm Water Runoff Control Program
- Industrial/Commercial Facilities Storm Water Runoff Control Program
- Municipal Operations Storm Water Runoff Control (Pollution Prevention/Good Housekeeping) Program
- Public Involvement and Participation Program
- Planning and Land Development/Post Construction Storm Water Runoff Control Program

A. Illegal Connection and Illicit Discharge Elimination Program

The Permittee shall develop, implement, and enforce an Illegal Connection and Illicit Discharge Elimination Program to detect, investigate, and eliminate illegal connections and illicit discharges (IC/IDs) to the MS4¹⁴⁸. The Permittee's program shall consist of at least the following major program components:

- Outfall Mapping
- Field Monitoring for Illicit Discharges
- Source Investigation and Elimination
- Identification and Response to Illegal Connections
- Public Reporting of Non-Storm Discharges and Spills
- Spill Response Plan
- Education and Training
- Enforcement, as discussed in **Section B**, Legal Authority.

As stated in this Order, the Permittee shall have adequate legal authority to effectively prohibit IC/IDs to the MS4 and enable enforcement capabilities to eliminate the source of IC/IDs.

1. Outfall Mapping

- a) The Permittee shall create and maintain an up-to-date and accurate outfall map¹⁴⁹. The map may be in hard copy and/or electronic form or within a geographic information system (GIS). The development of

¹⁴⁸ The Permittee shall use the Center for Watershed Protection's guide on *Illicit Discharge Detection and Elimination: [A Guidance Manual for Program Development and Technical Assessments](https://owl.cwp.org/mdocs-posts/idde-guidance-manual/)* available at (<https://owl.cwp.org/mdocs-posts/idde-guidance-manual/>) or equivalent when developing an [IC/ID program](https://www.epa.gov/npdes/national-menu-best-management-practices-bmps-stormwater-illicit-discharge-detection-and). Guidance can also be found at: (<https://www.epa.gov/npdes/national-menu-best-management-practices-bmps-stormwater-illicit-discharge-detection-and>).

¹⁴⁹ The Permittee may utilize existing forms such as the [Center for Watershed Protection Outfall Reconnaissance Inventory/Sample Collection Field Sheet](https://owl.cwp.org/mdocs-posts/ori_lab_form/) while conducting the mapping inventory and Field Sampling (https://owl.cwp.org/mdocs-posts/ori_lab_form/)

the outfall map shall include a visual outfall inventory involving a site visit to each outfall¹⁵⁰.

- b) The outfall map shall at a minimum show:
 - (1) The location of all outfalls that are operated by the Permittee within the urbanized area, drainage areas, and land use(s) contributing to those outfalls that are operated by the Permittee, and that discharge within the Permittee's Jurisdictional Runoff Area to a receiving water.
 - (2) The location (and name, where known to the Permittee) of all water bodies receiving direct discharges from those outfall pipes.
 - (3) Priority areas include, but are not limited to the following:
 - (a) Areas with older infrastructure that are more likely to have illegal connections and a history of sewer overflows or cross-connections;
 - (b) Industrial, commercial, or mixed use areas;
 - (c) Areas with a history of past illicit discharges;
 - (d) Areas with a history of illegal dumping; and
 - (e) Areas with onsite sewage disposal systems.
 - (4) A list of the priority areas shall be updated annually.

2. Field Monitoring for Illicit Discharges

- a) Field sampling for illicit discharges shall only occur during dry weather conditions (more than 3 days after the last rain event). The Permittee shall sample any outfalls that are flowing or ponding during dry weather conditions in response to complaints or in accordance with a field sampling schedule. The Permittee shall also conduct sampling during dry weather conditions of outfalls annually identified as priority areas.
- b) The Permittee shall:
 - (1) Conduct monitoring¹⁵¹ to help determine the source of the discharge, if necessary.
 - (2) Conduct follow up investigations, if necessary.

¹⁵⁰ Site visits are not required for submerged outfalls or other outfalls that may pose a threat to public safety and/or are inaccessible. A list of these outfalls shall be maintained.

¹⁵¹ A description of indicator parameter sampling equipment is described in Chapter 12: Indicator Monitoring in the Center for Watershed Protection's Illicit Discharge Detection and Elimination: A [Guidance Manual for Program Development and Technical Assessments](https://owl.cwp.org/mdocs-posts/idde-guidance-manual/) found at: (<https://owl.cwp.org/mdocs-posts/idde-guidance-manual/>). Sampling may be conducted using field test kits.

3. Source Investigation and Elimination

- a) The Permittee shall develop and implement written procedures for conducting investigations to identify the source of all suspected illicit discharges/illegal connections, including procedures to eliminate the discharge if the source is located.
- b) The Permittee shall initiate an investigation(s) to identify and locate the source within 72 hours of becoming aware of the suspected illicit discharge/illegal connection. Sanitary sewage and/or significant discharges shall be prioritized over lesser discharges.
- c) The Permittee shall track all investigations and document via an inspection report the date(s) the illicit discharge was observed; the results of the investigation; enforcement and/or corrective actions taken; and the date the investigation was closed. Records may be maintained in hardcopy and/or electronic form but shall be retained for three (3) years.
- d) When taking corrective action to eliminate illicit discharges, the Permittee shall comply with the following:
 - (1) If the source of the illicit discharge has been determined to originate within the Permittee's Jurisdictional Runoff Area, the Permittee shall immediately notify the responsible party/parties of the problem (if identified) and require the responsible party to initiate all necessary corrective actions to eliminate and clean-up the area impacted by the illicit discharge. Upon being notified that the discharge has been eliminated, the Permittee shall conduct a follow-up investigation to verify that the discharge has been eliminated and cleaned-up. The Permittee shall document its follow-up investigation. Resulting enforcement actions shall follow the program's enforcement response procedures.
 - (2) If the source of the illicit discharge has been determined to originate outside of the Permittee's Jurisdictional Runoff Area, the Permittee shall notify the entity having jurisdiction and the Central Valley Water Board within thirty (30) calendar days of such determination and provide all of the information collected regarding efforts to identify the source. The Permittee may seek recovery and remediation costs from responsible parties or require compensation for the cost of all inspection, investigation, cleanup and oversight activities. Resulting enforcement actions shall follow the program's enforcement response procedures.
 - (3) If the source of the illicit discharge cannot be traced to a suspected responsible party the Permittee shall notify the Central Valley Water Board in writing within thirty (30) calendar days of such determination and describe what actions have been taken.

4. Identification and Response to Illegal Connections

a) Investigation

The Permittee, upon discovery or upon receiving a report of a suspected illegal connection, shall initiate an investigation within twenty-one (21) calendar days, to determine the following, to the extent feasible: (1) source of the connection, (2) nature and volume of discharge through the connection, and (3) responsible party for the connection.

b) Elimination

The Permittee, upon confirmation of an illegal connection to the MS4, shall ensure that the connection is:

- (1) Permitted or documented, provided the connection will only discharge storm water and non-storm water allowed under this Order or other individual or general NPDES Permits/WDRs, or
- (2) Eliminated within 180 calendar days of completion of the investigation, using its formal enforcement authority, if necessary. If additional time is needed for elimination of the connection, the Permittee shall request an extension from the Central Valley Water Board in writing within thirty (30) calendar days of such determination and note what actions have been taken to date and the circumstances that will require additional time for elimination.

c) Documentation

- (1) Formal inspection reports and records shall be maintained for all illegal connection investigations as well as the formal enforcement taken to eliminate them.

5. Public Reporting of Illegal Connections and Illicit Discharges

a) The Permittee shall promote, publicize, and facilitate public reporting of IC/ID through a central contact point, including phone numbers and/or an internet site for complaints and spill reporting. The Permittee shall also provide the reporting hotline/website to Permittee staff to leverage the field staff that has direct contact with the MS4 in detecting and eliminating IC/ ID.

b) The Permittee shall implement the central point of contact and reporting hotline requirements listed in this part in one or more of the following methods:

- (1) By participating in the Permittee sponsored hotline/website; or
- (2) By participating in one or more watershed group sponsored hotlines/websites or implementing the hotline/website individually within its own jurisdiction.

- c) The Permittee shall ensure that where signage adjacent to open MS4 channels exists, that it includes information regarding dumping prohibitions and public reporting of IC/ ID.
- d) The Permittee shall develop and maintain written procedures that document how complaint calls are received, documented, and tracked to ensure that all complaints are adequately addressed. The procedures shall be evaluated at least once during the permit term to determine whether changes or updates are needed to ensure that the procedures accurately document the methods employed by the Permittee. Any identified changes shall be made to the procedures subsequent to the evaluation.
- e) The Permittee shall maintain documentation of the complaint calls and record the location of the reported spill or IC/ ID and the actions undertaken in response to all IC/ID complaints, **including** referrals to other agencies.

6. Spill Response Procedures

The Permittee shall develop and implement spill response procedures for all SSOs, and other spills that may discharge into its MS4. The spill response procedures shall clearly identify the agencies responsible for spill response and cleanup, telephone numbers and e-mail address for contacts, and shall contain at a minimum the following requirements:

- a) Coordination with spill response teams throughout all appropriate departments, programs and/or applicable agencies so that maximum water quality protection is provided.
- b) Initiate investigation of all public and employee spill complaints within three (3) business day of receiving the complaint to assess validity of the complaint.
- c) Spills that may endanger human health or the environment shall be reported to appropriate public health agencies and the Office of Emergency Services (OES) as soon as possible.
- d) The spill response procedures shall be evaluated at least once during the permit term to determine whether changes or updates are needed to ensure that the spill response procedures are accurately addressed and contact information is correct/current. Any identified changes shall be made to the procedures subsequent to the evaluation.

7. Illegal Connection and Illicit Discharge Education and Training

- a) The Permittee shall develop and implement a training program for all Permittee staff who as part of their normal job responsibilities, may

be notified of, come into contact with, or otherwise observe an illicit discharge or illegal connection to the MS4 conveyance system. Contact information, including the procedure for reporting an illicit discharge, shall be readily available to field staff. Training program documents shall be available for review by the Central Valley Water Board.

- b) The Permittee shall create a list of applicable positions and contractors which require IC/ID training and ensure that training is provided at least twice during the term of the Order. The Permittee shall maintain documentation of the training activities.
 - (1) The training program shall include at a minimum:
 - (2) Identification of an illicit discharge or illegal connection.
 - (3) Proper procedures for reporting and responding to the illicit discharge or illegal connection.
 - (4) An assessment of their trained staff's knowledge of illicit discharge response and refresher training as needed.
 - (5) Training for new staff that, as part of their normal job responsibilities may be notified of, come into contact with, or otherwise observe an illicit discharge or illegal connection shall be trained no later than one year after the start of employment.
 - (6) Contact information, including the procedure for reporting an illicit discharge, shall be included in each of the Permittee's fleet vehicles that are used by field staff.

K.3. Construction Site Storm Water Runoff Control Program

The Permittee shall develop, implement, and enforce a Construction Site Storm Water Runoff Control Program for all construction sites, public or private. The Permittee's construction program shall consist of the following components:

- BMP Requirements for All Construction Sites
- Construction Site Inventory
- Construction Plan Review and Approval Procedures
- Construction Site Inspection and Enforcement
- Construction Outreach, Education, and Training

As stated in this Order, the Permittee shall establish for its Jurisdictional Runoff Area an enforceable construction site storm water runoff control ordinance for all public and private construction sites that disturb soil.

A. Requirements for All Construction Sites

For public or private construction sites, the Permittee shall:

1. Through the use of the Permittee's construction site storm water runoff control ordinance or grading and/or building permit, require the implementation of an effective combination of erosion and sediment control BMPs to prevent erosion and sediment loss, and the discharge of construction wastes.
2. Possess the ability to identify all construction sites with soil disturbing activities that require a permit, regardless of size, and shall be able to provide a list of permitted sites upon request of the Central Valley Water Board. Permittees may use existing permit databases or other tracking systems to comply with these requirements.
3. Inspect construction sites on as needed based on the evaluation of the factors that are a threat to water quality. In evaluating the threat to water quality, the following factors shall be considered: soil erosion potential; site slope; project size and type; sensitivity of receiving water bodies; proximity to receiving water bodies; non-storm water discharges; past record of non-compliance by the operators of the construction site; and any water quality issues relevant to the particular MS4.
4. Implement the Permittee's Enforcement Response Plan to ensure that construction sites are brought into compliance with the erosion and sediment control ordinance or construction site storm water runoff control ordinance within a reasonable time period.

B. Construction Site Inventory

1. The Permittee shall maintain an inventory of all public or private projects subject to the local construction site storm water runoff control ordinance or State Water Board's General NPDES Permit for *Storm Water Discharges Associated with Construction and Land Disturbance Activities* (CGP) within its Jurisdictional Runoff Area.
2. The Permittee shall maintain an inventory of all construction projects and continuously update as new projects are permitted and projects are completed. The inventory shall address all projects subject to the local construction site storm water runoff control ordinance. For projects subject to the CGP the Permittee may obtain the inventory from the SMARTS database and shall supplement it as needed.
3. The inventory shall contain, at a minimum:
 - a) Relevant contact information for each project (e.g., name, address, phone, email, etc. for the owner and contractor);
 - b) The basic site information including location, status, size of the project and area of disturbance;
 - c) The location of the project with respect to all water bodies, water bodies listed as impaired by sediment-related pollutants, and water bodies listed

as impaired for sediment or turbidity under the CWA section 303(d) and approved by USEPA;

- d) Project threat to water quality;
- e) Current construction phase;
- f) The required inspection frequency per the local construction site storm water runoff control ordinance;
- g) The project start and completion dates; and
- h) The date the Permittee approved the Erosion and Sediment Control Plan (ESCP).

C. Construction Plan Review and Approval Procedures

1. The Permittee shall develop and implement procedures to review and approve relevant construction plan documents.
2. The review procedures shall meet the following minimum requirements:
 - a) Prior to issuing a grading or a building permit with soil disturbing activity, the Permittee shall require each operator of a construction activity within its Jurisdictional Runoff Area to prepare and submit an ESCP for the Permittee's review and written approval. The Permittee shall not approve any ESCP unless it contains appropriate site-specific construction site BMPs that meet the requirements of the Permittee's construction site storm water runoff control ordinance. If the ESCP is revised, the Permittee shall review and approve those revisions.
 - b) Require that the ESCP include the rationale used for selecting BMPs including supporting soil loss calculations, if necessary.
 - c) Require that the ESCP list applicable permits directly associated with the grading activity, including, but not limited to the CGP, 401 Water Quality Certification, United States Army Corps 404 permit, and/or California Department of Fish and Game 1600 Agreement. Include as a condition of the building or grading permit that the operator submit evidence to the MS4 that all necessary permits directly associated with the building or grading activity have been obtained prior to commencing the soil disturbing activities authorized by the building or grading permit.
 - d) Conduct and document review of each ESCP using a checklist or similar process.
 - e) Note whether the facility is known to maintain coverage under the CGP or other individual or general NPDES permits or any applicable

waiver issued by the Regional or State Water Board pertaining to storm water discharges.

- f) A SWPPP developed pursuant to the CGP may substitute for an ESCP. The Permittee is responsible for reviewing applicable portions of the SWPPP for compliance with the Permittee's construction site storm water runoff control ordinance.

D. Construction Site Inspection and Enforcement

1. The Permittee shall possess and use legal authority to implement procedures for inspecting public and private construction projects and conduct enforcement if necessary. The Permittee may leverage existing inspection procedures and personnel to conduct construction site inspections and enforcement.
2. The Permittee shall track all inspections to document at a minimum the inspection date(s); inspection results and follow-up, if applicable; and the construction completion date. Documentation shall be recorded in inspection reports. Records may be maintained in hardcopy and/or electronic form but shall be retained for three (3) years after the construction completion date. The inspection report shall also include any identified deficiencies and the actions taken to correct the deficiencies.
3. The inspection procedures shall be implemented to verify compliance with the Permittee's construction site storm water control ordinance. At a minimum, inspections shall be conducted at priority construction sites during active construction and following active construction. Prioritization criteria for construction sites shall be based on project threat to water quality. Project threat to water quality includes soil erosion potential, site slope, projects size and type, sensitivity of receiving water bodies, proximity to receiving water bodies, non-storm water discharges, projects more than one (1) acre that are not subject to the CGP (sites that have obtained an Erosivity Waiver) or possess a past record of non-compliance by the operator of the construction site. Inspection frequencies shall be conducted based on this prioritized criteria and the following requirements:
 - a) Construction site inspections shall include assessment of compliance with the Permittee's construction site storm water runoff control ordinance, and other applicable ordinances. The Permittee may propose, for Executive Officer's approval, an alternative approach for construction site oversight, provided the Permittee demonstrates the approach will be equally effective at reducing the discharge of pollutants from construction sites to the MEP.
 - b) During active construction, the Permittee shall conduct inspections, based on prioritization of construction sites. Active construction inspections shall include at a minimum: inspection of BMP

maintenance and effectiveness installed and verification that pollutants of concern are not discharged into receiving waters.

- c) At the conclusion of the project, the Permittee shall inspect to ensure that all disturbed areas have been stabilized and that all temporary erosion and sediment control measures that are no longer needed have been removed as required by the local construction site storm water control ordinance.

E. Construction Outreach, Education and Training

1. The Permittee shall ensure that all staff implementing the construction site storm water runoff control program are adequately trained.
2. The Permittee may conduct in-house training or contract with consultants. Training shall be provided to the following staff positions of the MS4:
 - a) Plan Reviewers and Permitting Staff - The Permittee shall ensure plan reviewers and permitting staff are qualified individuals, knowledgeable in the technical review of local ESCPs, (including proper control measure selection, installation, implementation, and maintenance), and are certified pursuant to a State Water Board sponsored program as a qualified SWPPP Developer (QSD), or a designated person on staff possesses the QSD credential either (1) a Qualified SWPPP Developer (QSD); (2) a Qualified SWPPP Practitioner (QSP); or (3) a designated person on staff possesses each credential (QSD to supervise plan review, QSP to supervise inspection operations).
 - b) Erosion Sediment Control/Storm Water Inspectors - The Permittee shall ensure inspectors are qualified individuals, knowledgeable in inspection procedures, and are certified pursuant to a State Water Board sponsored program as either a (1) QSD; (2) QSP; or (3) a designated person on staff possesses each credential (QSD to supervise plan review, QSP to supervise inspection operations).
 - c) Third-Party Plan Reviewers, Permitting Staff, and Inspectors - If the Permittee utilizes outside parties to review plans and/or conduct inspections, the Permittee shall ensure these staff are trained.
3. The Permittee shall develop and distribute educational materials to construction site operators.
4. The Permittee shall do the following:
 - a) Each year, provide information on training opportunities for construction operators on BMP selection, installation, implementation, and maintenance as well as overall program compliance.
 - b) Develop or utilize existing outreach tools (i.e. brochures, posters, etc.) aimed at educating construction operators on appropriate

selection, installation, implementation, and maintenance of storm water BMPs, as well as overall program compliance.

- c) Distribute appropriate outreach materials to all construction operators who will be disturbing land within the MS4 boundary. The Permittee's contact information and website shall be included in these materials.
- d) Update the existing storm water website, as necessary, to include information on appropriate selection, installation, implementation, and maintenance of BMPs.

K.4.Industrial/Commercial Facilities Storm Water Runoff Control Program

The Permittee shall develop and implement an Industrial/Commercial Facilities Storm Water Runoff Control Program that meets the requirements of this Order.

The Permittee's Industrial/Commercial program shall consist of the following components:

- Inventory Industrial/Commercial Sources
- Inspect Industrial/Commercial Sources
- Source Control BMPs for Industrial/Commercial Facilities
- Industrial/Commercial Facility Enforcement
- Industrial/Commercial Facilities Education and Training

The Permittee shall establish for its Jurisdictional Runoff Area an enforceable storm water runoff control ordinance for all industrial and commercial facilities.

A. Inventory Industrial/Commercial Sources

1. The Permittee shall develop and maintain an inventory or database containing the location of all industrial and commercial facilities within its Jurisdictional Runoff Area that are sources of storm water pollution, as defined below. The inventory or database shall be maintained in electronic format and incorporation of facility information into a GIS is recommended. Sources to be included within the inventory/database are:

a) Commercial Facilities

(1) Restaurants

(2) Automotive service facilities (including those located at automotive dealerships)

(3) Retail Gasoline Outlets

- (4) Nurseries and Nursery Centers (Merchant Wholesalers, Nondurable Goods, and Retail Trade)
 - b) USEPA “Phase I” Facilities [as specified in 40 CFR §122.26(b)(14)]
 - (1) facilities subject to storm water effluent limitation guidelines, new source performance standards, or toxic pollutant effluent standards (40 CFR N);
 - (2) manufacturing facilities;
 - (3) oil and gas/mining facilities;
 - (4) hazardous waste treatment, storage, or disposal facilities;
 - (5) landfills, land application sites, and open dumps;
 - (6) recycling facilities;
 - (7) steam electric power generating facilities
 - (8) transportation facilities;
 - (9) sewage of wastewater treatment works; and
 - (10) light manufacturing facilities.
 - c) Other federally-mandated facilities [as specified in 40 CFR §122.26(d)(2)(iv)(C)]
 - (1) Municipal landfills;
 - (2) Hazardous waste treatment, disposal, and recovery facilities;
 - (3) Industrial facilities subject to section 313 “Toxic Release Inventory” reporting requirements of the Emergency Planning and Community Right-to-Know Act of 1986 [42 USC § 11023]
 - d) All other commercial or industrial facilities that the Executive Officer or the Permittee determines may contribute a substantial pollutant load to the MS4.
2. The Permittee shall include the following fields of information for each source industrial and commercial facility identified in its inventory or database:
- i. Name of facility
 - ii. Name of owner/ operator and contact information

- iii. Address of facility (physical and mailing)
 - iv. North American Industry Classification System (NAICS) code
 - v. Standard Industrial Classification (SIC) code
 - vi. A narrative description of the activities performed and/or principal products produced
 - vii. Status of exposure of materials to storm water
 - viii. Name of receiving water
 - ix. Identification of whether the facility is tributary to a CWA section 303(d) listed water body segment or water body segment subject to a TMDL, where the facility generates pollutants for which the water body segment is impaired.
 - x. Notation whether the facility is known to maintain coverage under the State Water Board's General NPDES Permit for *Storm Water Discharges Associated with Industrial Activities* (Industrial General Permit) or other individual or general NPDES permits or any applicable waiver issued by the Regional or State Water Board pertaining to storm water discharges.
 - xi. Notation whether the facility has filed a No Exposure Certification (NEC), Notice of Non-Applicability (NONA), or Notice of Termination (NOT) with the State Water Board.
3. The Permittee shall update its inventory of sources at least annually. The update shall be accomplished through collection of new information obtained through field activities or through other readily available inter- and intra-agency informational databases (e.g., business licenses, pretreatment permits, sanitary sewer connection permits, and SMARTS database).

B. Inspect Commercial Sources

The Permittee shall conduct commercial facility compliance inspections as specified below. Records may be maintained in hardcopy and/or electronic form but shall be retained for 3 years. The inspection report shall also include any identified deficiencies and the corrective actions taken to correct the deficiencies.

1. Frequency of Commercial Facility Inspections

The Permittee shall inspect all inventoried commercial facilities twice during the 5-year term of the Order, provided that the first compliance inspection occurs no later than two (2) years after the Permittee receives its Notice of Applicability. A minimum interval of six (6) months between the first and the second mandatory compliance inspection is required.

2. Scope of Commercial Facility Inspections

The Permittee shall inspect all commercial facilities to confirm that BMPs are being effectively implemented in compliance with municipal ordinances. At each facility, inspectors shall verify that the operator is implementing effective source control BMPs for each corresponding activity.

c. Inspect Industrial Sources

The Permittee shall conduct industrial facility compliance inspections as specified below. Records may be maintained in hardcopy and/or electronic form but shall be retained for three (3) years. The inspection report shall also include any identified deficiencies and the corrective actions taken to correct the deficiencies.

1. Frequency of Industrial Facility Compliance Inspections

a) Minimum Inspection Frequency

The Permittee shall perform an initial compliance inspection at all inventoried industrial facilities no later than 2 years after the effective date of this Order. A minimum interval of 6 months between the first and the second compliance inspection is required. A facility need not be inspected more than twice during the term of the Order.

2. Scope of Industrial Facility Inspections

The Permittee shall confirm that each industrial facility:

- a) Has a current Waste Discharge Identification (WDID) number for coverage under the Industrial General Permit, and that a Storm Water Pollution Prevention Plan (SWPPP) is available on-site; *or*
- b) Has applied for, and has received a current No Exposure Certification for facilities subject to this requirement;
- c) Is effectively implementing BMPs in compliance with municipal ordinances. Facilities shall implement effective source control BMPs, unless the pollutant generating activity does not occur. If the BMPs are not adequately protective, the Permittee may require additional site-specific controls.
- d) Applicable industrial facilities identified as not having either a current WDID or No Exposure Certification shall be notified that they shall obtain coverage under the Industrial General Permit and shall be referred to the Central Valley Water.

D. Source Control BMPs for Industrial and Commercial Facilities

Effective source control BMPs for the activities shall be implemented at commercial and industrial facilities, unless the pollutant generating activity does not occur. Pollutant generating activities include unauthorized non-storm water discharges; accidental spills/leaks, vehicle or equipment fueling, cleaning or repair; outdoor liquid storage, equipment operations, or storage of raw materials; storage and handling of solid waste, building and grounds maintenance; parking or storage area maintenance; and storm water conveyance system maintenance practices.

E. Industrial Site Inspection and Enforcement

1. The Permittee shall use their legal authority to implement procedures for inspecting industrial sites and conduct enforcement if necessary. The Permittee may leverage existing inspection procedures and personnel to conduct industrial site inspections and enforcement that meet the requirements of this Order.
2. The Permittee shall track all inspections to document at a minimum the inspection date(s); inspection results and follow-up, if applicable. Documentation shall be recorded in inspection reports. Records may be maintained in hardcopy and/or electronic form but shall be retained for three (3) years. The inspection report shall also include any identified deficiencies and the corrective actions taken to correct the deficiencies.
3. The inspection procedures shall be implemented to verify compliance with the Permittee's storm water control ordinance. The Permittee shall inspect all inventoried commercial facilities twice during the 5-year term of the Order, provided that the first mandatory compliance inspection occurs no later than 2 years after the effective date of this Order. A minimum interval of 6 months between the first and the second mandatory compliance inspection is required. Prioritization criteria for industrial sites shall be based on project threat to water quality. Site threat to water quality includes sensitivity of receiving water bodies, proximity to receiving water bodies, non-storm water discharges, projects that are not subject to the IGP. Inspection frequencies shall be conducted based on these prioritized criteria and the following requirements:
 - a) Industrial site inspections shall include assessment of compliance with the Permittee's site storm water runoff control ordinance, and other applicable ordinances. The Permittee may propose, for Executive Officer's approval, an alternative approach for industrial site oversight, provided the Permittee demonstrates the approach will be equally effective at reducing the discharge of pollutants from industrial sites to the MEP.

- b) Active industrial site inspections shall include at a minimum: inspection of maintenance of BMPs, and effectiveness installed and verification that pollutants of concern are not discharged into receiving water bodies.
4. The Permittee shall determine if the facilities that are required to be covered under the Statewide Industrial General Permit have done so. Upon discovering any facilities requiring permit coverage but are not yet permitted, the Permittee shall notify the Central Valley Water Board and include documentation of the notifications in the Mid-term and End-term Reports.

F. Industrial/Commercial Facilities Education and Training

At least once during the term of this Order, the Permittee shall notify the owner/operator of each of its inventoried commercial and industrial sites identified of the BMP requirements applicable to the site/source.

K.5. Municipal Operations Storm Water Runoff Control Program

The Permittee shall develop and implement a Municipal Operations Storm Water Runoff Control Program that meets the requirements of this Order. The Municipal Operations Program shall consist of the following components:

- Inventory of Permittee-Owned and Operated Facilities
- Facility Assessment
- Storm Water Pollution Prevention Plans
- Inspections, Visual Monitoring and Remedial Action
 - a. MS4 conveyance system Assessment and Prioritization
 - b. Maintenance of MS4 conveyance system
 - c. Permittee Operations and Maintenance Activities
- Municipal Operations/Pollution Prevention and Good Housekeeping Education and Training

A. Inventory of Permittee-Owned and Operated Facilities

1. The Permittee shall develop and maintain an inventory of Permittee-owned or operated facilities within their Jurisdictional Runoff Area that are a threat to water quality, if applicable.
2. The inventory shall include all Permittee-owned or operated facilities within their Jurisdictional Runoff Area that are potential significant sources of pollution in storm water, including the following if applicable:

- a) Airports
- b) Animal control facilities
- c) Chemical storage facilities
- d) Composting facilities
- e) Equipment storage and maintenance facilities (including landscape-related operations)
- f) Fuel farms
- g) Hazardous waste disposal facilities
- h) Hazardous waste handling and transfer facilities
- i) Incinerators
- j) Landfills
- k) Materials storage yards
- l) Pesticide storage facilities
- m) Public parking lots
- n) Public golf courses
- o) Public swimming pools
- p) Public parks
- q) Public works yards
- r) Public marinas
- s) Public roads
- t) Recycling facilities
- u) Salt or de-icing storage facilities
- v) Solid waste handling and transfer facilities
- w) Transportation hubs (e.g. bus transfer stations)
- x) Vehicle storage and maintenance areas
- y) Vehicle fueling facilities

z) Other (as directed Central Valley Water Board)

B. Facility Assessment

1. For all the inventoried Permittee-owned or operated facilities, the Permittee shall conduct a comprehensive inspection and assessment of pollutant discharge potential and identification of priority areas.
2. Conduct an initial review and assessment of all municipally owned or operated facilities to determine their potential to impact surface waters. The assessment shall include the following:
 - a) Based on the initial assessment, the Permittee shall identify those facilities that have a high potential to generate storm water and non-storm water pollutants as pollutant priority areas and assign them a high priority. Among the factors to be considered are the type and volume of pollutants stored at the site, the presence of improperly stored materials, activities that should not be performed outside (e.g., changing automotive fluids, vehicle washing), proximity to water bodies, poor housekeeping practices, and the discharge of pollutant(s) of concern to receiving water(s). Pollutant priority areas shall include, at a minimum, the Permittee's maintenance yards, hazardous waste facilities, fuel storage and/or dispensing locations, airports, marinas, and any other facilities at which chemicals or other materials have a high potential to be discharged in storm water and are located within the Permittee's Jurisdictional Runoff Area.
 - b) The Permittee shall document implemented procedures to conduct the comprehensive assessment along with a copy of any site evaluation checklists used to conduct the comprehensive assessment.

C. Storm Water Pollution Prevention Plans

1. The Permittee shall develop and implement SWPPPs for priority facilities. If the Permittee has an existing document such as Hazardous Materials Business Plan, Spill Prevention Plan, facility pollution prevention plan, or other equivalent document for a priority facility, the Permittee is not required to develop a SWPPP for that facility.
2. The Permittee shall implement the following:
 - a) The Permittee shall develop and implement a site-specific SWPPP that identifies existing storm water BMPs and a set of storm water

BMPs to be installed, implemented, and maintained as needed to minimize the discharge of pollutants to protect water quality.¹⁵²

- b) The SWPPP(s) shall be kept on-site at each of the Permittee-owned or operated facilities' offices for which it was completed. The SWPPP shall be updated as necessary.
- c) At a minimum the SWPPP will address the following:
 - (1) Facility specific information (location, owner, address, etc.)
 - (2) Purpose of the document
 - (3) Key staff/contacts at the facility
 - (4) Site map with drainage identified
 - (5) Identification of significant materials that are handled and stored at the facility that may be exposed to storm water
 - (6) Description of potential pollutant sources
 - (7) Facility BMPs
 - (8) Spill control and cleanup – response to spills
 - (9) Inspection schedule
 - (10) Inspection procedures and checklist for inspections conducted to ensure proper selection, implementation, and maintenance of all BMPs.

D. Inspections, Visual Monitoring and Remedial Action

- 1. The Permittee shall conduct regular inspections of Permittee-owned and operated facilities. Records may be maintained in hardcopy or electronic form but shall be retained for three (3) years.
- 2. Inspections shall be conducted as follows:
 - a) Annual Priority Facility inspections – At least once per year, the Permittee shall conduct a comprehensive inspection of each priority facility, including all storm water BMPs, in accordance with the facility-specific inspection procedures and inspection checklist. The Permittee shall pay specific attention, without limiting its attention, to: waste storage areas, dumpsters, vehicle and equipment

¹⁵² The Permittee may utilize the Center for Watershed Protection guide on Urban Subwatershed and Site Reconnaissance, or equivalent, as guidance.

maintenance/fueling areas, material handling areas, and similar potential pollutant-generating areas. The annual inspection results shall be documented and records kept with the SWPPP. The inspection report shall also include any identified deficiencies and the corrective actions taken to correct deficiencies.

- b) Non-Priority Facility Inspection. At a minimum, inspect each inventoried municipal facility that is not a priority facility, once per five (5) years.

E. MS4 Conveyance System Assessment and Prioritization

1. The Permittee shall develop and implement procedures to assess and prioritize MS4 conveyance system maintenance, including catch basins, detention basins, pump stations, and above-ground conveyances within the Permittee's urbanized area.
2. The Permittee shall assess and prioritize MS4 conveyance system facilities for cleanout. The Permittee shall assign a priority to MS4 storm drain facilities within the Permittee's urbanized areas based on accumulation of sediment, trash and/or debris. In particular, assign high priority to catch basins meeting any of the following criteria:
 - a) Catch basins known to accumulate a significant amount of sediment, trash, and/or debris;
 - b) Catch basins collecting large volumes of runoff;
 - (1) Catch basin collecting runoff from area that do not receive regular street sweeping;
 - (2) Catch basins collecting runoff from drainage areas with exposed or disturbed soil; or
 - (3) Catch basins that receive citizen complaints/reports.

F. Maintenance of MS4 Conveyance System

1. The Permittee shall begin maintenance of all high priority MS4 conveyance systems on an ongoing schedule.
2. The Permittee shall begin maintenance of MS4 conveyance systems according to the procedures and priorities developed according to this Order. At a minimum the Permittee shall:
 - a) Inspect MS4 conveyance systems – Develop and implement a strategy to inspect MS4 conveyance systems within the Permittee's Jurisdictional Runoff Area. At a minimum, inspect all high priority catch basins and systems annually.

- b) Clean catch basins – Develop and implement a schedule to clean high priority catch basins and other systems. Cleaning frequencies shall be based on priority areas, with higher priority areas receiving more frequent maintenance.
- c) Labeling catch basins – Ensure that each catch basin in high foot traffic areas includes a legible storm water awareness message (e.g., a label, stencil, marker, or pre-cast message such as “drains to the creek” or “only rain in the drain”). Drop inlets/ with illegible or missing labels shall be recorded and re-labeled within one month of receiving a report of a damaged or missing label.
- d) Maintain surface drainage structures – High priority facilities, such as those with recurrent illegal dumping, shall be reviewed and maintained annually as needed. Non-priority facilities shall be reviewed as needed. Removal of trash and debris from high priority areas shall occur annually prior to the rainy season.
- e) Dispose of waste materials – Develop and implement a procedure to dewater and dispose of materials extracted from catch basins. This procedure shall ensure that water removed during the catch basin cleaning process and waste material will not reenter the MS4.

G. Permittee Operations and Maintenance (O&M) Activities

- 1. The Permittee shall assess their O&M activities for potential to discharge pollutants in storm water and inspect all O&M BMPs on a regular basis.
- 2. The Permittee shall:
 - a) Develop and implement a program to assess O&M activities and subsequently develop applicable BMPs. The following Permittee O&M activities shall be included in the assessment for their potential to discharge pollutants in storm water:
 - (1) Road and parking lot maintenance, including sidewalk repair, curb and gutter repair, pothole repair, pavement marking, sealing, and re-paving
 - (2) Bridge maintenance, including re-chipping, grinding, saw cutting, and painting
 - (3) Cold weather operations (as applicable), including plowing, sanding, and application of deicing compounds and maintenance of snow disposal areas

- (4) Right-of-way maintenance, including mowing, herbicide and pesticide application, and planting vegetation
- (5) Storm water relevant Permittee-sponsored or sanctioned events such as large outdoor festivals, parades, or street fairs (e.g., Earth Day, Coastal Cleanup Day, Creek Week)
- (6) Green waste deposited in the street
- (7) Discharges from potable water sources not regulated by other NPDES permit.

H. Municipal Operations/Pollution Prevention and Good Housekeeping Education and Training

1. The Permittee shall develop and implement a training program for key employees involved in implementing pollution prevention and good housekeeping practices as specified in this Order. The Permittee shall train employees on how to incorporate pollution prevention/good housekeeping techniques into Permittee operations. All new hires whose jobs include implementation of pollution prevention and good housekeeping practices shall receive this training within the first year of their hire date.
2. The training program shall include the following:
 - a) Training for the key employees implementing this program element. This training shall include a general storm water education component, discussion of new technologies, operations, or responsibilities, and the permit requirements that apply to the staff being trained. Employees shall receive clear guidance on appropriate storm water BMPs to use at municipal facilities and during typical O&M activities.
 - b) An assessment of trained staff's knowledge of pollution prevention and good housekeeping, as needed.

K.6. Public Involvement and Participation Program

The objectives of the Public Involvement and Participation Program are as follows:

- Involve the public in the development and implementation of the Permittee's Storm Water Management Program; and
 - Involve a diversity of socio-economic groups and ethnic communities in their respective jurisdictions to participate in implementation of the storm water program.
1. The Permittee shall develop and implement a comprehensive storm water education and outreach program. The education and outreach program

shall be designed to reduce pollutant discharges in storm water runoff and non-storm water discharges to the MS4 through increased storm water knowledge and awareness in target communities. The Education and Outreach Program shall be designed to measurably increase the knowledge and awareness of targeted audience regarding the municipal MS4 conveyance system, impacts of urban runoff and non-storm water discharges on receiving waters, and potential BMP solutions for the target audiences, thereby reducing pollutant releases to the MS4 and the environment. The Permittee shall, at a minimum:

- a. Develop and implement an education strategy that establishes education tasks based on water quality problems, target audiences, and anticipated task effectiveness. The strategy shall include identification of who is responsible for implementing specific tasks and a schedule for task implementation. The strategy shall demonstrate how specific high priority storm water quality issues in the community or local pollutants of concern are addressed.
- b. Implement surveys at least twice every five years to gauge the level of awareness in target audiences and effectiveness of education tasks.
- c. Develop and convey a specific storm water message that focuses on the following:
 - i. Local pollutants of concern;
 - ii. Target audiences; and
 - iii. Regional water quality issues.
- d. Develop and disseminate appropriate educational materials to target audiences and translate into applicable languages when appropriate (e.g. the materials can utilize various media such as printed materials, billboard and mass transit advertisements, signage at select locations, stenciling at storm drain inlets, radio advertisements, television advertisements, and websites).
- e. Utilize public input (e.g., the opportunity for public comment, or public meetings) in the development of the program.
- f. Distribute the educational materials, using whichever methods and procedures determined appropriate during development of the public education strategy.

- g. Convey messages to explain the benefits of water-efficient and storm water-friendly landscaping¹⁵³, using existing information if available.
 - h. Develop and convey messages specific to reducing illicit discharges with information about how the public can report incidents to the appropriate authorities. The Permittee shall promote, publicize, and facilitate public reporting of illicit discharges or water quality impacts associated with discharges into or from MS4s through a central contact point, including phone numbers for complaints and spill reporting, and publicize to both internal Permittee staff and the public.
 - i. Develop and convey messages specific to proper application of pesticides, herbicides, and fertilizers.
 - j. Develop (or coordinate with existing, effective programs) and convey messages specific to reducing discharges from organized car washes, mobile cleaning and pressure washing operations, and landscape irrigation.
 - k. Conduct storm water-friendly education for organized car wash participants and provide information pertaining to car wash discharge reduction.¹⁵⁴
 - l. Develop and convey messages specific to mobile cleaning and pressure wash businesses.
2. The Permittee shall involve the public in the development and implementation of activities related to the program. The public participation and involvement program shall encourage volunteerism, public comment and input on policy, and activism in the community.
3. Develop a public involvement and participation strategy that establishes who is responsible for specific tasks and goals.
- a. Consider development of a citizen advisory group (either a stand-alone group or utilize an existing group or process). The advisory group may consist of a balanced representation of all affected parties, including residents, business owners, and environmental organizations in the MS4 service area and/or affected watershed. The Permittee may invite the citizen advisory group to participate in the development and implementation of all parts of the community's storm water program.

¹⁵³ For example, Sacramento Stormwater Quality Partnership's River Friendly Landscaping (<http://www.ecolandscaping.org/riverfriendly/>) and the Water Efficient Landscape Ordinance (WELO)

¹⁵⁴ The Permittee may use the Sacramento Stormwater Quality Partnership's River Friendly Carwash Program, or equivalent, for guidance.

- b. Create opportunities for citizens to participate in the implementation of BMPs through sponsoring activities (e.g., stream/river/lake clean-ups, storm drain stenciling, volunteer monitoring and educational activities).
- c. Ensure the public can easily find information about the Permittee's storm water program.

K.7.Planning and Land Development/Post Construction Storm Water Management Program

The Permittee shall develop and implement the Planning and Land Development/Post Construction program to minimize the short- and long-term impacts on receiving water quality from new development and redevelopment.

The objectives of the Planning and Land Development program are to:

- Incorporate water quality and watershed protection principles into the Permittee's policies, planning procedures (e.g., General Plan, CEQA analyses, planning/entitlement processes, etc.) and development permit approval process;
- Develop and implement planning and land development standards;
- Ensure that post-construction storm water quality controls are required and properly selected during the development approval process to minimize storm water quality impacts to the MEP for both private priority development projects and Permittee-owned development projects;
- Ensure that post-construction storm water quality controls are selected based on project- and site-specific conditions and land use characteristics, as well as receiving water impacts;
- Ensure that selected post-construction storm water quality controls will remain effective upon project completion by requiring appropriate maintenance provisions and/or agreements and/or establishment of a maintenance district for all priority development projects;
- Develop and/or maintain a tracking system to track the ownership and maintenance history of selected post-construction storm water quality controls to ensure adequate long-term maintenance; and
- Provide regular internal training to key staff on applicable components of the Planning and Land Development program.

The Permittee shall review, update as needed, and continue to implement its Planning and Land Development program. Any new or updated Planning and Land Development Program components shall be included in the SWMP. The

Planning and Land Development/Post Construction¹⁵⁵ program shall incorporate the following components:

A. Priority Development Projects¹⁵⁶

The Permittee shall define the criteria and thresholds for the Priority Development Projects that will be subject to the requirements specified as a part of this program. A Permittee may propose criteria that differ from those listed in the definition of “Priority Development Project” in **Attachment C** as long as its SWMP demonstrates that the criteria are designed to achieve equivalent protection of water quality that would be achieved by the criteria listed in **Attachment C**. If a Permittee has already received prior board approval of alternate criteria for defining Priority Development Projects, the Permittee’s SWMP need only reference the Central Valley Water Board order providing such approval, or else append a copy of the board decision approving the alternate criteria to the SWMP. However, the Executive Officer retains the discretion to require a Permittee to revisit and justify either its existing criteria or revised criteria.

In addition, the Permittee shall develop policies to define and promote preferred types of development (infill, redevelopment). These policies may include less stringent criteria for preferred priority projects.

B. Site Design Measures

Each Permittee shall require priority new development and redevelopment projects to assess the possibility of integrating Site Design strategies. Site Design is a storm water management strategy that emphasizes conservation and use of existing natural site features integrated with distributed, small-scale storm water controls to more closely mimic natural hydrologic patterns in residential, commercial, and industrial settings.

C. Source Control Measures

The Permittee shall develop strategies that control the sources of pollutants or constituents (i.e., the point where water initially meets the ground) to minimize

¹⁵⁵ *Post-Construction Performance Standards & Water Quality-Based Requirements, A Compendium of Permitting Approaches, Municipal Separate Storm Sewer System Permits*, EPA 833-R-14-003, USEPA, June 2014.

¹⁵⁶ For categories of priority development projects, see the definition in **Attachment C (Acronyms, Abbreviations, and Definitions)** which is based on State Water Board Order WQ-2000-11, approved on 5 October 2000 and State Water Board Memorandum dated 26 December 2000 pertaining to the decision in State Water Board Order WQ-2000-11 to use Standard Urban Storm Water Mitigation Plans (SUSMPs) in Phase I MS45 Permits.

the transport of urban runoff and pollutants offsite and into the Permittee MS4. Source controls are intended to keep pollutants from mixing with runoff. All development projects shall require permanent markers discouraging dumping to be applied to storm drain inlets. In addition, source control measures shall be required for the following areas:

1. Fueling areas
2. Loading areas
3. Outdoor material storage areas
4. Outdoor work areas (e.g., processing, manufacturing)
5. Vehicle and equipment wash areas
6. Waste management areas (garbage, recycling, restaurant food waste)

The Permittee's development standards shall require new development and redevelopment projects to incorporate applicable source controls.

D. Treatment Control Measures

The Permittee shall require Priority Development Projects to assess the feasibility and necessity of incorporating treatment control measures. Storm water quality treatment control measures are engineered technologies designed to remove pollutants from site runoff. Treatment control measures may include but are not limited to: bioretention planters, vegetated filter strips and swales, infiltration trenches and basins, sand filters, detention basins and select proprietary devices.

The Permittee's development standards shall require Priority Development Projects to incorporate treatment control measures as needed and feasible. The Permittee shall also consider that the required treatment volume or flow can be reduced or met through the use of LID measures.

E. Numeric Sizing Criteria

Where utilized, the Permittee shall require the implementation of storm water quality treatment control measures and applicable LID strategies to be designed to treat either the water quality flow (WQF) or water quality volume (WQV) as follows:

1. WQF-based measures shall be designed to treat:
 - a) The maximum (peak) flow rate of runoff produced by the 85th percentile hourly precipitation intensity, based on historical rainfall records, multiplied by a factor of two.

- b) The maximum flow rate of runoff as determined from local historical rainfall records, that achieves approximately the same reduction in pollutant loads and flows as achieved by mitigation of the 85th percentile hourly rainfall intensity multiplied by a factor of two; or
 - c) The Permittee justified maximum flow rate that is determined as part of the Development Standards (submitted as a part of the SWMP) that achieves approximately the same reduction in pollutant loads and flows as achieved by mitigation of the 85th percentile hourly rainfall intensity multiplied by a factor of two.
2. WQV-based measures shall be designed to capture and treat either:
- a) The maximized storm water quality capture volume for the area, based on historical rainfall records, determined using the formula and volume capture coefficients set forth in *Urban Runoff Quality Management (WEF Manual of Practice No. 23/ASCE Manual of Practice No. 87, (1998), pages 175-178)* or equivalent method; or
 - (1) The volume of runoff produced from a 85th percentile, 24-hour storm event, as determined for the local historical rainfall records; or
 - (2) Eighty (80) percent of the volume of annual runoff, determined in accordance with the methodology set forth in Appendix D of the California Storm Water Best Management Practices Handbook (Stormwater Quality Task Force, 1993), using local historical rainfall records; or
 - (3) The Permittee justified design storm volume that is determined as part of the Development Standards (submitted as a part of the SWMP). The treatment of this volume shall achieve approximately the same reduction in pollutant loads achieved by treatment of the 85th percentile, 24-hour storm event.

Selected sizing criteria shall be incorporated into the Permittee's development standards. Storm flows above these values shall be considered compliant with the Order as the levels of dilution available in such flows reduce concentrations accordingly.

F. Infiltration BMPs

The Permittee shall consider the type of development and resulting storm water discharge and, if appropriate, consider the use of structural BMPs that are designed to primarily function as infiltration devices (e.g., infiltration trenches,

infiltration basins, bioretention planters, porous pavement, dry wells¹⁵⁷) so long as the devices will not adversely impact groundwater quality. These restrictions and when they should be applied shall be described in the Permittee's Development Standards.

G. Maintenance Agreement and Transfers

The Permittee shall require Priority Development Projects to ensure selected post-construction storm water quality controls will remain effective upon project completion by requiring legal agreements, covenants, or CEQA mitigation requirements, and/or conditional use permits.

H. Low Impact Development Strategies

The Permittee shall require Priority Development Projects to assess the possibility of integrating Low Impact Development (LID) strategies. LID is a storm water management strategy that emphasizes conservation and use of existing natural site features integrated with distributed, small-scale storm water controls to more closely mimic natural hydrologic patterns in residential, commercial, and industrial settings. LID employs a variety of natural and structural features that reduce the rate of runoff, filter out its pollutants, and facilitate the infiltration of water into the ground. Furthermore, Senate Bill 985 and the State Water Resources Control Board's Storm Water Strategy encourage the use of storm water as a resource to augment water supply.

LID measures may include but are not limited to: stream setbacks and buffers, soil amendments, tree planting and preservation, rooftop and impervious area disconnection, porous pavement, eco roofs, bioretention planters, and rain barrels or cisterns. The Permittee's development standards shall require Priority Development Projects to integrate LID strategies where feasible to do so.¹⁵⁸ This Order encourages the Permittees to develop storm water management programs that promote the use of storm water as a resource.

This Order requires the Permittee to incorporate Low Impact Development into the Planning and Land Development program.

I. Hydromodification Management Plan

The Permittees shall require Priority Development Projects, not otherwise exempted, that will discharge into natural drainage systems, to implement

¹⁵⁷ The Regional and/or State Boards are in the process of developing guidelines specific to the design and siting of dry wells that should be followed when established.

¹⁵⁸ The *California Phase II LID Sizing Tool*, a web-based tool, may assist Permittees in the selection and sizing of LID BMPs. <http://owp-web1.saclink.csus.edu/LIDTool/Start.aspx>

hydrologic control measures to prevent accelerated downstream erosion and to protect stream habitat.

1. This Order requires the Permittees to develop and implement a Hydromodification Management Plan (HMP). The HMP shall include measures that manage the increases in the magnitude (e.g., flow control), frequency, volume and duration of runoff from development projects in the range of flows to control in order to protect natural drainage systems from increased potential for erosion. The HMP may include one (or more) of the following management strategies:
 - a) Erosion Potential: Hydromodification control in natural drainage systems shall be achieved by maintaining the Erosion Potential (Ep) in streams at a value of approximately 1, unless an alternative value can be shown to be protective of the natural drainage systems from erosion, incision, and sedimentation that can occur as a result of flow increases from impervious surfaces and prevent damage to stream habitat in natural drainage system tributaries (**Attachment I, Determination of Erosion Potential**).
 - b) Flow Duration Control: post-project runoff shall not exceed estimated pre- project rates and/ or durations (At least 90% of the flows must not have discharge frequencies (% of time) that exceed the pre-project discharge frequencies in the range of flows to control. Those flows that have frequencies that exceed pre-project discharge frequencies may not exceed it by more than 10%.) where the increased storm water discharge rates and/or durations will result in increased potential for erosion.
 - c) Other equivalent design criteria that is equally protective of natural drainage systems. This method will be subject to approval by the Executive Officer.

Natural drainage systems that are subject to the hydromodification assessments and controls include all drainages that have not been improved (e.g., channelized or armored with concrete, shotcrete, or rip-rap) or drainage systems that are tributary to a natural drainage system, except as provided below (Exemptions to Hydromodification Controls). The clearing or dredging of a natural drainage system does not constitute an "improvement."

2. Exemptions to Hydromodification Controls: The Permittees may exempt the following Priority Development Projects from implementation of hydromodification controls where assessments of downstream channel conditions and proposed discharge hydrology indicate that adverse hydromodification effects to beneficial uses of natural drainage systems are unlikely:

- a) Projects that are replacement, maintenance or repair of the Permittees' existing flood control facilities, storm drains, public utilities, or transportation network.
- b) Redevelopment Projects (e.g., infill) that do not increase the effective impervious area or decrease the infiltration capacity of pervious areas compared to the pre-project conditions.
- c) Construction of infill projects in highly developed watersheds, where the potential for single-project and/or cumulative impacts is minimal.
- d) Projects that have any increased discharge directly or via a storm drain to a sump, drainage pump station, lake, area under tidal influence, or into a waterway (e.g., perennial river) that is not susceptible to hydromodification impacts.
- e) Projects that discharge directly or via a storm drain into concrete or otherwise engineered (not natural) channels (e.g., channelized or armored with rip rap, shotcrete, concrete lined, etc.), which, in turn, discharge into a receiving water that is not susceptible to hydromodification impacts.

Hydromodification controls may include one, or a combination of onsite, regional or sub-regional hydromodification control measures, LID strategies, or stream and riparian buffer restoration measures. Any in-stream restoration measure shall not adversely affect the beneficial uses of the natural drainage systems. LID BMPs implemented on single family homes are sufficient to comply with Hydromodification criteria.

The HMP shall be developed no later than 1-year after the approval of the SWMP by the Regional Board. If a Permittee or group of Permittees has already developed, or is in the process of developing, a HMP, they may assess the HMP and the method in which it was developed to determine what modifications (if any) are necessary to comply with this provision.

The Permittees' development standards shall require Priority Development Projects to integrate hydromodification strategies, as needed. LID strategies and treatment controls may simultaneously address the hydromodification management requirements.

J. Technical Guidance

The Permittee shall develop and maintain a Technical Guidance manual of development standards consistent with the requirements of the provisions in this program element. The Technical Guidance shall include site design measures, source controls, treatment controls, LID, hydromodification, and erosion and sediment control strategies, if not already included in other applicable technical guidance. The schedule for development, modification and implementation of

the Technical Guidance manual shall be included in the Permittee's SWMP. The Permittee may adopt existing technical guidance manuals/standards to assist in meeting the intent of this Order.

The Permittee's development standards shall require Priority Development Projects to integrate LID and hydromodification strategies to meet the requirements of this Order.

K. Mitigation Funding

The Permittee may propose a management framework, for approval by the Executive Officer, to support regional or sub-regional solutions to storm water pollution, where any of the following situations occur:

1. A waiver for impracticability is granted; or
2. Legislative funds become available; or
3. Off-site mitigation is required because of loss of environmental habitat; or
4. An approved watershed management plan or a regional storm water mitigation plan exists that incorporates an equivalent or improved strategy for storm water mitigation.

L. Regional Storm Water Mitigation

The Permittee may propose an existing or new regional or sub-regional storm water mitigation program as a part of the SWMP to substitute completely or in part for the development standards requirements. The Executive Officer may approve such a program if the Permittee can demonstrate that its implementation will:

1. Result in equivalent or improved storm water quality;
2. Protect stream habitat;
3. Promote cooperative problem solving by diverse interests;
4. Be fiscally sustainable and have secure funding;
5. Be completed in five years, or as soon as possible if an extraordinarily large or phased in project, including the construction and start-up of treatment facilities.

M. Alternative Compliance Program to Onsite LID and Hydromodification Implementation

At the discretion of the Permittee, Priority Development Projects may be allowed to participate in an alternative compliance program in lieu of requiring the implementation of LID and hydromodification measures onsite.¹⁵⁹ The alternative compliance program is available to a Priority Development Project only if the Priority Development Project applicant enters into a voluntary agreement with the Permittee authorizing this arrangement. In addition to the voluntary agreement, relief from implementing LID and hydromodification measures onsite may be authorized by the Permittee under the following conditions for candidate projects:

1. The Priority Development Project applicant agrees to fund, contribute funds to, or implement a candidate project;
2. The Permittee shall determine that implementation of the candidate project will have an equal or greater overall water quality benefit than requiring implementation of LID and hydromodification measures onsite;
3. If the Priority Development Project applicant chooses to fully or partially fund a candidate project, then the Permittee shall ensure that the funds to be obtained from the Priority Development Project applicant are sufficient to mitigate for impacts caused by not fully implementing LID and hydromodification measures onsite;
4. The voluntary agreement to fund, partially fund, or implement a candidate project shall include reliable sources of funding and a plan for operation and maintenance of the candidate project. Reliable sources of funding may include escrow accounts, bonds, letters of credit, or other such mechanisms;
5. Design of the candidate project shall be conducted under an appropriately qualified engineer, geologist, architect, landscape architect, or other professional, licenses where applicable, and competent and proficient in the fields pertinent to the candidate project design;
6. The candidate project shall be constructed as soon as possible, but no later than four (4) years after the certificate of occupancy is granted for the first Priority Development Project that contributed funds toward the construction of the candidate project, unless a longer period of time is authorized by the Executive Officer; and

¹⁵⁹ Such as the [National Fish and Wildlife Foundation's In-Lieu Fee Program](https://www.nfwf.org/mitigating-impacts/sacramento-district-california-lieu-fee-program) or other similar mitigation bank that provides a mitigation option alternative. (<https://www.nfwf.org/mitigating-impacts/sacramento-district-california-lieu-fee-program>)

7. If the candidate project is constructed after the Priority Development Project is constructed, the Permittee shall require temporal mitigation for pollutant loads and altered flows that are discharged from the Priority Development Project.

N. Alternative Compliance In-Lieu Fee Structure

If the Permittee chooses to allow a Priority Development Project applicant to fund or partially fund a candidate project or an alternative compliance project, then the Permittee shall develop and implement an in-lieu fee structure. This may be developed individually or with other Permittees and/or entities, as a means for designing, developing, constructing, operating, and maintaining offsite alternative compliance projects. The in-lieu fee shall be transferred to the Permittee (for public projects) or an escrow account (for private projects) prior to the construction of the Priority Development Project. Any in-lieu fee structure that the Permittee chooses to implement shall be submitted to the Central Valley Water Board for review and acceptance as part of the SWMP.

O. Alternative Compliance Water Quality Credit System Option

The Permittee may develop and implement an alternative compliance water quality credit system option, individually or with other Permittees and/or entities, provided that such a credit system clearly exhibits that it will not allow discharges from Priority Development Projects to cause or contribute to a net impact over and above the impact caused by projects meeting the onsite LID and hydromodification implementation requirements. Any credit system that the Permittee chooses to implement shall be submitted to the Central Valley Water Board for review and acceptance as part of the SWMP.

P. Retrofitting and Rehabilitation

1. Retrofitting Areas of Existing Development

The Permittee should develop a planning process that will incorporate consideration of storm water retrofit projects¹⁶⁰ to address existing development that are identified as significant contributors of PWQCs. The planning process should consider the following:

- a) A storm water retrofit strategy that corrects prior design or performance deficiencies; disconnects impervious areas; storm

¹⁶⁰ Schuler, T., Hirschmann, D., Novotney, M., and J. Zilinski. *Urban Watershed Restoration Manual No. 3: Urban Stormwater Retrofit Practices*, [Center for Watershed Protection](https://owl.cwp.org/mdocs-posts/urban-subwatershed-restoration-manual-series-manual-3/), prepared for Office of Wastewater Management, USEPA, July 2007, (<https://owl.cwp.org/mdocs-posts/urban-subwatershed-restoration-manual-series-manual-3/>).

water capture¹⁶¹ to mitigate drought conditions, improves groundwater recharge and/or infiltration performance; addresses PWQCs; demonstrates new technologies; and/or supports stream restoration activities;

- b) Develop an inventory of potential retrofit projects;
 - c) Establish a prioritization strategy to rank each project considering;
 - (1) PWQCs;
 - (2) Potential pollutant removal and drainage area affected;
 - (3) Stream channel protection capability;
 - (4) Design, construction, inspection, and maintenance costs of facility, considering the applicability of storage or on-site retrofits;
 - (5) Ability to implement the project;
 - (6) Potential for cumulative benefit; and
 - (7) Infiltration capacity of the subsurface.
2. Stream, Channel, and/or Habitat Restoration in Areas of Existing Development

The Permittee should develop a planning process to evaluate opportunities for rehabilitation projects in areas of existing development. The planning process should consider:

- a) Developing a rehabilitation strategy that addresses storm water runoff flows and durations that cause or contribute to hydromodification in receiving waters; rehabilitates channelized or hydromodified streams; restores wetlands and/or riparian habitats; restores watershed functions; and/or restores beneficial uses of receiving waters;
- b) Develop an inventory of potential rehabilitation projects;
- c) Establish a prioritization strategy to rank each project considering;
 - (1) PWQCs;

¹⁶¹ *Stormwater Capture Potential in Urban and Suburban California*, Issue Brief, Natural Resources Defense Council, June 2014.

- (2) Potential pollutant removal and drainage area affected;
- (3) Bank stabilization capability;
- (4) Design, construction, inspection, and maintenance costs, considering the applicability of storage or on-site retrofits;
- (5) Ability to implement the project; and
- (6) Potential for cumulative benefit.

Q. Coordination, Enforcement and Tracking

1. The Permittee shall provide for the review of proposed project plans and require measures to ensure that all applicable Priority Development Projects will be in compliance with their storm water ordinances, and development standards.
2. The Permittee shall develop a process by which development standards will be implemented and include that process within the SWMP. The process shall identify at what point in the planning process development projects will be required to meet development standards. The process shall also include identification of the roles and responsibilities of various municipal departments, as applicable, in implementing the development standards, as well as any other measures necessary for the implementation of development standards.
3. The Permittee shall develop a GIS or other electronic system for tracking projects that have been issued a permit for the construction of post-construction treatment control BMPs, including ownership information and responsibility and maintenance information and history.

R. Planning and Land Development Program Education and Training

The Permittee shall develop and implement a training program for key municipal staff and/or agency contracted staff involved in implementing the Planning and Land Development Program as specified in this Order. The Permittee shall train municipal staff and/or agency contracted staff on how to incorporate low impact development, hydromodification, and other techniques into private and public projects. All new hires whose jobs include implementation of Planning and Land Development Program shall receive this training within the first year of their hire date. The training program shall include the following:

1. A focus on general storm water education, new methods or technologies, application of permit requirements and responsibilities, and the permit requirements that apply to the staff being trained.
2. Guidance on appropriate BMPs to apply to private and public projects.

3. An assessment of trained staff and contractor's knowledge of the Planning and Land Development Program.
4. Revisions to the training as needed.

K.8. Monitoring Requirements

A. Purpose

The monitoring program provides a framework for the adaptive management of the Permittee's storm water program. Each Permittee will document their approach for complying with the monitoring program requirements in the SWMP and provide a detailed implementation schedule as a part of the Work Plan. For the purposes of this section, monitoring includes the collection of both programmatic and water quality data and information.

The primary objectives of the monitoring program may include, but are not limited to:

1. Assessing compliance with this Order;
2. Assessing the overall health of receiving waters and evaluating long-term trends in receiving water quality;
3. Characterizing urban runoff and evaluating the long-term trends;
4. Assessing the impacts on receiving waters resulting from urban runoff;
5. Identifying the likely sources of pollutants and PWQCs;
6. Assessing the effectiveness of specific storm water quality controls and/or management actions;
7. Supports the development of water quality models and/or other data assessment tools; and/or
8. Identifying modifications to improve the effectiveness of the SWMP.

Ultimately, the goal of the monitoring program is to inform the Permittee, to the extent feasible, about the nexus between the implementation of the storm water program, the quality of the discharges from the MS4, and the resulting impact, if any, on the receiving water. This goal will be accomplished through monitoring, assessing, and reporting the conditions of the receiving waters, discharges from the MS4, pollutant sources, and the effectiveness of the water quality improvement strategies implemented as part of the SWMP and Work Plan.

B. Monitoring Study Design and Implementation Schedule

The Permittees shall include a Monitoring Study Design and Implementation Schedule with its SWMP that complies with the monitoring requirements provided in **Attachment G** (*Specific Provisions for Total Maximum Daily Loads Applicable to Order R5-2026-0XXX*) and **Attachment H** (*Standard Permit Provisions and General Provisions*) and address the following:

1. Monitoring Approach

The SWMP should specify the monitoring approach selected including a narrative summary outlining the rationale for selecting the approach. The monitoring approach shall include a periodic re-evaluation of constituents of concern in storm water (e.g., heavy metals, bacterial indicators, and current-use pesticides).

2. Monitoring Parameters and Methods

The SWMP shall specify:

- a) The parameters being sampled, including those required parameters specified in **Attachment E**, *Monitoring Requirements*;
- b) Field and laboratory methods, including Reporting Limits, Method Detection Limits, and Minimum Levels¹⁶²; and
- c) Sampling types and frequencies.

3. Monitoring Locations

The SWMP shall include the following to specify monitoring site locations:

- a) Justification for each monitoring/sampling location chosen.
- b) A map showing the following:
 - (1) Surface water bodies with the Jurisdictional Runoff Area, including those that are CWA section 303(d) listed or where a TMDL has been developed;
 - (2) Identification of MS4 outfalls that discharge to surface water bodies located within the Jurisdictional Runoff Area; and

¹⁶² For priority pollutants, MLs shall be used for all analyses, unless otherwise specified. If a particular ML is not attainable in accordance with procedures set forth in 40 CFR 136, the lowest quantifiable concentration of the lowest calibration standard analyzed by a specific analytical procedure may be used instead.

- (3) The location of monitoring/sampling locations within the Jurisdictional Runoff Area with station identification numbers and descriptions.

4. Quality Assurance/Quality Control

The SWMP shall include a Quality Assurance Project Plan (QAPP), in accordance with the quality assurance/quality control (QA/QC) and other protocols (e.g., Standard Operating Procedures for bioassessment) established by the Surface Water Ambient Monitoring Program (SWAMP). All samples should be collected and analyzed in accordance with the methods specified in 40 CFR Part 136. Field testing, sample collection, preservation, laboratory testing, including quality control procedures and all record keeping shall comply with the most current version of the [SWAMP QAPP](#) which is available at:

(https://www.waterboards.ca.gov/water_issues/programs/swamp/quality_assurance.html)

A formatted Microsoft Word document that includes [guidelines and boilerplate language for developing the QAPP](#) is available at:

(https://www.waterboards.ca.gov/water_issues/programs/swamp/quality_assurance.html)

5. Local Water Quality Monitoring Requirements

a) Type of monitoring:

- (1) dry weather screening;
- (2) wet¹⁶³ and dry weather events, including rainfall data, hydrographs, and a narrative description of the storm or dry weather event;
- (3) MS4 discharge, collected within six (6) hours of receiving water sampling event and includes the first flush event, and other sampling events spread over a wet weather season, and dry weather sampling events;
- (4) receiving water, collected within six (6) hours of MS4 discharge sampling event and includes the first flush event, and other

¹⁶³ A wet weather event has 0.25 inches accumulated rainfall over the past 24-hours with a 50-percent (50%) chance of precipitation reported by the National Weather Service.

sampling events spread over a wet weather season, and dry weather sampling events;

- (5) bioassessment;
 - (a) The following bioassessment samples and measurements must be collected at least once during a dry weather sampling event during the term of this Order:
 - (i) Macroinvertebrate samples must be collected in accordance with the “Reachwide Benthos (Multihabitat) Procedure” in the most current Surface Water Ambient Monitoring Program (SWAMP) Bioassessment Standard Operating Procedures (SOP), and amendments, as applicable;¹⁶⁴
 - (ii) The “Full” suite of physical habitat characterization measurements must be collected in accordance with the most current SWAMP Bioassessment SOP, and as summarized in the SWAMP Stream Habitat Characterization Form – Full Version;¹⁶⁵ and
 - (iii) Freshwater algae samples must be collected in accordance with the SWAMP Standard Operating Procedures for Collecting Algae Samples.¹⁶⁶ Analysis of samples must include algal taxonomic composition (diatoms and soft algae) and algal biomass.
 - (b) The bioassessment samples, measurements, and appropriate water chemistry data must be used to calculate the following:

¹⁶⁴ Ode, P.R.. 2007. Standard operating procedures for collecting macroinvertebrate samples and associated physical and chemical data for ambient bioassessments in California. California State Water Resources Control Board [Surface Water Ambient Monitoring Program \(SWAMP\) Bioassessment SOP 001](https://www.waterboards.ca.gov/water_issues/programs/swamp/bioassessment/sops.html) (https://www.waterboards.ca.gov/water_issues/programs/swamp/bioassessment/sops.html).

¹⁶⁵ Available at: https://www.waterboards.ca.gov/water_issues/programs/swamp/bioassessment/sops.html

¹⁶⁶ Fetscher et al. 2009. Standard Operating Procedures for Collecting Stream Algae Samples and Associated Physical Habitat and Chemical Data for Ambient Bioassessments in California.

- (i) An Index of Biological Integrity (IBI) for macroinvertebrates for each monitoring station where bioassessment monitoring was conducted, based on the most current calculation method;¹⁶⁷ and
 - (ii) An IBI for algae for each monitoring station where bioassessment monitoring was conducted, when a calculation method is developed.¹⁶⁸
 - (6) CWA section 303(d) Listed impairments and TMDL (Water Quality Based Plans), including total suspended solids and suspended sediment concentration¹⁶⁹ monitoring;
 - (7) sediment and water column toxicity (e.g., aquatic toxicity) in receiving waters during wet weather, including:
 - (a) Toxicity monitoring specified in **Attachment E**.
6. The Permittees shall submit any collected monitoring data during the previous reporting year (July 1 through June 30) with each Annual Report. Collected monitoring data shall be uploaded to the California Environmental Data Exchange Network (CEDEN)¹⁷⁰, or the Storm Water Multi-Application Reporting and Tracking System (commonly known as SMARTS) database when available.

K.9.Regional Monitoring Program

If directed by the Executive Officer (see **Part D**, below) or requested by the Permittee (and approved by the Executive Officer), the Permittee shall participate in a regional monitoring program (RMP) to address all or part of the local water quality monitoring requirements of this Order.

- A. Permittees that participate in a RMP may request a reduction in some of the local water quality monitoring specified in the monitoring requirements of this

¹⁶⁷ The most current calculation method at the time the Order was adopted is outlined in “A Quantitative Tool for Assessing the Integrity of Southern California Coastal Streams” (Ode, et al. 2005. Environmental Management. Vol. 35, No. 1, pp. 1-13). If an updated or new calculation method is developed, either both (i.e. current and updated/new) methods must be used, or historical IBIs must be recalculated with the updated or new calculation method.

¹⁶⁸ When a calculation method is developed, IBIs must be calculated for all available and appropriate historical data.

¹⁶⁹ Suspended sediment concentration (SSC) must be analyzed per American Society for Testing and Materials (ASTM) Standard Test Method D-3977-97

¹⁷⁰ Data must be uploaded to CEDEN using the templates provided on the CEDEN website.

Order. Participation in a RMP by a Permittee shall consist of providing funds and/or in-kind services to the RMP at least equivalent to discontinued individual monitoring and study efforts.

- B. If the Permittee proposes to reduce the local water quality monitoring in exchange for participation in a RMP, the Permittee shall submit a letter signed by an authorized representative to the Central Valley Water Board Executive Officer requesting to participate in a RMP, the date on which local water quality monitoring required under the monitoring requirements for this Order, would cease, or be modified, and specific monitoring locations and constituent combinations that would no longer be conducted individually. To ensure consistency with this Order, reductions in local water quality monitoring require the Executive Officer's prior written approval of the Permittee's request, including related SWMP modifications. Approval by the Executive Officer is not required prior to participating in the RMP if the Permittee is not requesting reductions in local water quality monitoring.
- C. If the Permittee is approved to participate in a RMP and reduce some local water quality monitoring, the Permittee shall continue to participate in a RMP until such time as the Permittee informs the Central Valley Water Board Executive Officer that participation in a RMP will cease and all local water quality monitoring will be reinstituted. To the extent approved by the Executive Officer, some local water quality monitoring and related monitoring identified in the SWMP, required under this Order may be discontinued so long as the Permittee adequately supports a RMP. If the Permittee fails to maintain adequate participation in a RMP by not providing funds and/or in-kind services, the Permittee shall reinstitute all previously required individual local water quality monitoring. During participation in the RMP, the Permittee shall conduct and submit any or part of the monitoring included in these monitoring requirements described in this Order that is deemed appropriate by the Permittee, provided the modified monitoring program approved by the Executive Officer is conducted at a minimum.
- D. RMP data is not intended to be used directly to represent receiving water quality for purposes of determining if a discharge is causing or contributing to an exceedance of any applicable water quality standards. RMP monitoring stations are established generally as "integrator sites" to evaluate the combined impacts on water quality of multiple sources; RMP monitoring stations would not normally be able to identify the source of any specific constituent but would be used to identify water quality issues needing further evaluation. Thus, data from the RMP may be utilized as a preliminary step toward characterizing the receiving water. Alternatively, the Permittee may conduct any site-specific receiving water monitoring deemed appropriate by the Permittee and submit that monitoring data with this characterization monitoring. RMP monitoring data, along with local Permittee data, may be used to help establish ambient receiving water quality. RMP data, as with all environmental monitoring data, can provide an assessment of water quality at

a specific location and time that can be used in conjunction with other information (i.e. other receiving water monitoring data, spatial and temporal distribution and trends of receiving water data, point and non-point source discharges, receiving water flowrate and velocity) to determine a potential source or sources of a constituent that contributed to an exceedance of any applicable water quality standards.

- E. During the period of participation in the RMP, the Permittee shall continue to report any individually conducted local water quality monitoring data in the Annual Report consistent with the monitoring requirements of this Order. In addition, with each submitted Annual Report, the Permittee shall include 1) a statement that the Permittee is participating in the RMP have reduced some of the local water quality monitoring program required by the permit, and 2) the Permittee shall continue to attach a copy of the letter originally submitted to the Central Valley Water Board Executive Officer describing the monitoring location(s) and constituents that will no longer be sampled individually.

K.10. Delta Regional Monitoring Program

A. Permittees Within the Legal Delta Boundary

Permittees within the legal Delta boundary are required to maintain adequate participation in the Delta Regional Monitoring Program to address all or part of the local water quality monitoring requirements of this Order. Adequate participation in the Delta Regional Monitoring Program is determined by the program's steering committee. The Permittees shall maintain adequate participation in the Delta Regional Monitoring Program for the entire term of this Order. Permittees that maintain such adequate participation shall be deemed in compliance with the local water quality monitoring to the extent the Executive Officer has authorized Delta RMP participation to replace such monitoring.

B. Permittees Outside the Legal Delta Boundary

Permittees outside of the legal Delta boundary may be required to participate in the Delta Regional Monitoring Program or other regional monitoring program, as applicable, if directed and approved by the Executive Officer to address all or part of the local water quality monitoring requirements of this Order. Adequate participation in the Delta Regional Monitoring Program is determined by the program's steering committee. Permittees that maintain such adequate participation shall be deemed in compliance with the local water quality monitoring to the extent the Executive Officer has authorized Delta RMP participation to replace such monitoring.

K.11. Trash Implementation

The Permittee shall implement the trash requirements in **Attachment N**.

K.12. Cost Reporting

The Permittee shall submit cost accounting information related to the implementation of this Order that complies with the State Water Board's *Water Quality Control Policy to Standardize Cost Reporting in Municipal Stormwater Permits*, 22 January 2025.

K.13. Asset Management

This Order encourages the Permittee to use effective asset management practices to implement their storm water program.

**Attachment L – Notice of Intent
For New Enrollees or Change of Information/Ownership**

ORDER R5-2026-0XXX

NPDES No. CAS0085324

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

AND WASTE DISCHARGE REQUIREMENTS GENERAL PERMIT

FOR

DISCHARGES FROM MUNICIPAL SEPARATE STORM SEWER SYSTEMS

I. NOTICE OF INTENT STATUS (see Instructions)

- Mark one item: ☐ A. New Permittee: _____
- ☐ B. Change of Information: WDID# _____
- ☐ C. Change of ownership or responsibility: _____

II. PERMITTEE CONTACT INFORMATION

A. Duly Authorized Representative (First and Last Name)			
B. Title of Duly Authorized Representative			
C. Mailing Address			
D. City	E. County	F. State	G. Zip
H. E-mail address		I. Phone (XXX-XXX-XXXX)	
J. Secondary Contact Person (First and Last Name)			
H. E-mail address		I. Phone (XXX-XXX-XXXX)	

III. BILLING CONTACT INFORMATION (Complete this Information *only* if different from Section II.)

A. Name (First and Last Name)			
B. Billing Address			
C. City	D. County	E. State	F. Zip
G. E-mail address		H. Phone (XXX-XXX-XXXX)	

IV. RECEIVING WATER INFORMATION

A. Name of Receiving water body(ies): _____

B. Name of major downstream water body(ies): _____

V. STORM WATER MANAGEMENT PLAN STATUS

Has a Storm Water Management Plan been prepared and is the MS4 operator and/or owner familiar with its contents?

Yes ☐

No ☐

If yes, date the Central Valley Water Board last approved the Storm Water Management Plan:

Date: _____

If not, when will it be prepared (date)? _____

VI. FEES

For new Permittees, has a payment of the filing fee been included with this submittal?

Yes ☐

No ☐

N/A ☐

Information concerning the [applicable fees](http://www.waterboards.ca.gov/resources/fees/water_quality/) can be found at (http://www.waterboards.ca.gov/resources/fees/water_quality/). Checks must be made payable to the State Water Resources Control Board (see **Part V.B.2**).

VII. CERTIFICATION

This Certification must be signed by a duly authorized representative consistent with the requirements contained in 40 CFR 122.22(a)(3).

"I certify under penalty of law that this document and all attachments were prepared under my direction and supervision in accordance with a system designed to ensure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment for knowing violations. Additionally, I certify that the provisions of the General Permit, including developing and implementing a monitoring program, will be complied with."

A. Printed Name: _____

B. Signature: _____

C. Title: _____

Date: _____

VIII. FOR CENTRAL VALLEY WATER BOARD STAFF USE ONLY

WDID#	Date NOI Received	Date NOI Processed
Staff Initials	Fee Amount Received	Check #
	\$	

INSTRUCTIONS FOR COMPLETING NOTICE OF INTENT

These instructions are intended to help you, the Permittee, to complete the Notice of Intent (NOI) form for the Region-wide MS4 Permit (General Permit). **Please type or print clearly when completing the NOI form.** For any field, if more space is needed, submit a supplemental letter with the NOI.

Send the completed and signed form along with the filing fee, if applicable, and supporting documentation to:

MS4 Program
Central Valley Regional Water Quality Control Board
11020 Sun Center, Suite 200
Rancho Cordova, 95670

Section I – Notice of Intent Status

Indicate whether this request is for the first-time coverage under this General Permit or a change of information for the discharge already covered under this General Permit. Permittees that are covered under previous MS4 permits issued by the Central Valley Water Board or State Water Board before the effective date of this General Permit should check the box for change of information. For a change of information or ownership and/or owner, please supply the eleven-digit Waste Discharge Identification (WDID) number for the discharge.

Section II – Permittee Contact Information

Complete this section with the following Permittee information:

- a. Enter the First and Last Name of the Duly Authorized Representative.
- b. Enter the title of the Duly Authorized Representative.
- c. Enter the street number and street name where general correspondence should be mailed to. A post office box is acceptable.
- d. Enter the city that applies to the mailing address given.
- e. Enter the county that applies to the mailing address given.
- f. Enter the state that applies to the mailing address given.
- g. Enter the zip code that applies to the mailing address given.
- h. Enter the email address of the Duly Authorized Representative.
- i. Enter the daytime telephone number of the Duly Authorized Representative.
- j. Enter the First and Last Name of a secondary contact person.
- k. Enter the email address of the secondary contact person.
- l. Enter the daytime telephone number (XXX-XXX-XXXX) of the secondary contact person.

Section III – Billing Contact Information

Complete this section **only** if different from Section II.

- A. Enter the First and Last Name of the person responsible for billing.
- B. Enter the street number and street name where billing correspondence should be mailed to. A post office box is acceptable.
- C. Enter the city that applies to the billing address.
- D. Enter the county that applies to the billing address.
- E. Enter the state that applies to the billing address.
- F. Enter the zip code that applies to the billing address.
- G. Enter the e-mail address of the person responsible for billing.
- H. Enter the daytime telephone number (XXX-XXX-XXXX) of the person responsible for billing.

Section IV – Receiving Water Information

List each receiving water body the MS4 discharges into, and all downstream water bodies for each receiving water.

Section V – Storm Water Management Plan Status

In this section, the Permittee should indicate whether or not a Storm Water Management Plan (SWMP) has been developed and that plan has been approved by the Central Valley Water Board.

Under this Order, the Permittee must prepare and submit a SWMP in accordance with the SWMP development timeframes described in **Part V.G.2**. The requirements for developing a Storm Water Management Plan are specified under **Part V. F.3**.

Section VI – Fees

The amount of Annual fee shall be based on the annual fee schedules specified in Title 23, California Code of Regulations, section 2200. [Fee information](http://www.waterboards.ca.gov/resources/fees/water_quality/) can be found at (http://www.waterboards.ca.gov/resources/fees/water_quality/).

New Permittees should check the YES box if an annual fee payment has been included. Permittees covered by previous individual permits issued by the Central Valley Water Board or State Water Board will continue to be billed annually.

Section VII – Certification

- A. Enter the First and Last Name of the Duly Authorized Representative.
- B. Enter the signature for the Duly Authorized Representative.
- C. Enter the title of the Duly Authorized Representative.
- D. Enter the date the NOI was signed by the Duly Authorized Representative.

Attachment M – Notice of Termination

ORDER R5-2026-0XXX

NPDES No. CAS0085324

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

AND WASTE DISCHARGE REQUIREMENTS GENERAL PERMIT

FOR

DISCHARGES FROM MUNICIPAL SEPARATE STORM SEWER SYSTEMS

I. WDID

WDID#: _____

II. DISCHARGER INFORMATION

A. Name			
B. Mailing Address			
C. City	D. County	E. State	F. Zip
G. Contact Person	H. E-mail address	I. Title	J. Phone

III. BASIS FOR TERMINATION

IV. CERTIFICATION

"I certify under penalty of law that 1) I am not required to be permitted under this General Permit No. CAS0085324, and 2) this document and all attachments were prepared under my direction and supervision in accordance with a system designed to ensure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment. Additionally, I understand that the submittal of this Notice of Termination does not release an operator and/or owner of a Municipal Separate Storm Sewer System (MS4) from liability for any violations of the Clean Water Act."

A. Printed Name:_____

B. Signature:_____

C. Title:_____

Date:_____

V. FOR CENTRAL VALLEY WATER BOARD USE ONLY

- ☐ **Approved for Termination**
- ☐ **Denied and Returned to the Discharger**

A. Printed Name:_____

B. Signature:_____

C. Date:_____

NOT Effective Date:_____

Attachment N – Trash Implementation

N1. If not completed previously, Permittees with regulatory authority over Priority Land Uses (PLUs),¹⁷¹ designated land uses,¹⁷² and Equivalent Alternate Land Uses¹⁷³ shall comply with the following requirements, as applicable:

A. Selection of Compliance Method:

Within 60 days of a Notice of Applicability, the Permittee shall select a Compliance Method (Track 1 or Track 2) and provide written notification to the Central Valley Water Board Executive Officer. Permittees who have already submitted this to the Executive Officer or the State Water Board do not need to resubmit.¹⁷⁴

1. Compliance Methods - The Permittee shall comply with the prohibition in **Part II.C** by installing, operating, and maintaining either:

- a. **Track 1:** A *Certified Trash Full Capture system*¹⁷⁵ for all storm drains that capture runoff from the PLUs, designated land uses, and equivalent alternate land uses in the Permittee's jurisdiction; or

¹⁷¹ Priority Land Uses as defined in Attachment C of this Order.

¹⁷² Designated land uses is a terminology used in this Order to refer to specific land uses or locations outside of Priority Land Uses that the Central Valley Water Board determines generate substantial amounts of Trash (see Attachment C for definition). Pursuant to the Trash Amendments, the Central Valley Water Board may determine that other specific land uses or locations generate substantial amounts of Trash and the time schedule for full compliance at these specific land uses or locations. In no case may the final compliance date be later than ten (10) years from the determination.

¹⁷³ Equivalent alternate land uses as defined in Attachment C of this Order. A Permittee may request authorization from the Central Valley Water Board Executive Officer to substitute one or more PLUs with equivalent alternate land uses that generate rates of trash equivalent to or greater than the PLU(s) being substituted.

¹⁷⁴ Permittees either selected a compliance method in response to the Central Valley Water Board's 1 June 2017, Water Code section 13383 Order to Submit Method to Comply with Statewide Trash Provisions: Requirements for Phase I Municipal Separate Storm Sewer Permittees in the Central Valley Region, State Water Board's 1 June 2017 section 13383 Order to Submit Method to Comply with Statewide Trash Provisions; Requirements for Traditional Small Municipal Separate Storm Sewer System Permittees, or State Water Board's 1 June 2017 section 13383 Order to Submit Method to Comply with Statewide Trash Provisions; Requirements for Non-Traditional Small Municipal Separate Storm Sewer System Permittees.

¹⁷⁵ Certified Trash Full Capture System as defined in Attachment C of this Order. A list of Trash Full Capture System Treatment Control Devices Certified by the State Water Board is available on the [State Water Board's Stormwater Program – Trash](#)

- b. **Track 2:** Any combination of *Certified Trash Full Capture Systems, multi-benefit projects, other treatment control measures, and/or institutional controls*, including trash cleanup activities expressed as trash capture credits. The Permittee may determine the locations or land uses to implement any combination of controls. Each Permittee shall demonstrate that such combination achieves Full Capture System Equivalency (FCSE).¹⁷⁶ Each Permittee may determine which controls to implement to achieve compliance with the FCSE requirements.

B. Modification of Compliance Method

The Permittee may change its compliance method using the following procedure:

1. Enter the new compliance Track via SMARTS, when available;
2. Submit a written notification to the Central Valley Water Board's Executive Officer along with any additional documentation required by the selected compliance method, consistent with the requirements specified in **N1.C** and **N1.D** if not previously submitted to the Executive Officer or State Water Board.
3. Comply with the requirements of the selected compliance track; and
4. A Permittee first electing to follow Track 1 and then modifying the compliance method to Track 2 must submit a Trash Implementation Plan that complies with **N1.D** within 6 months after notifying the Central Valley Water Board of the proposed change.

C. Track 1

The following requirements apply to Permittees that chose Track 1.

1. Permittees must install, operate, and maintain Certified Trash Full Capture Systems for all storm drains that capture runoff from the priority land uses, designated land uses (if required by the Executive Officer), and equivalent alternate land use areas (if approved by the Executive Officer) in each Permittee's jurisdiction.
2. Permittees must demonstrate achievement of interim milestones such as average load reductions per year or other progress to full implementation.

[Implementation Storm Water Program](https://www.waterboards.ca.gov/water_issues/programs/stormwater/trash_implementation.html) page at (https://www.waterboards.ca.gov/water_issues/programs/stormwater/trash_implementation.html).

¹⁷⁶ Full Capture System Equivalency as defined in Attachment C of this Order. The Permittee's Trash Implementation Plan includes FCSE rationale and the Baseline Trash Generation level.

3. Permittees may request Equivalent Alternate Land Uses to substitute one or more of the Priority Land Uses with alternate land uses within their jurisdiction that generate(s) rates of trash equivalent to or greater than the Priority Land Use(s) being substituted prior to installation and implementation of Certified Trash Full Capture Systems trash controls. The request must be made in writing and is subject to the Executive Officer's approval. Permittees must demonstrate in the request that the total trash generated in the Equivalent Alternate Land Use Area(s) is equivalent to or greater than the total trash generated from the Priority Land Use(s) being substituted. Comparative trash generation rates shall be established through the reporting of quantification measures such as street sweeping and catch basin cleanup records; mapping; visual trash presence surveys, such as the "Keep America Beautiful Visible Litter Survey"; or other relevant or applicable information.
4. The Permittee may coordinate activities with the California Department of Transportation to install, operate, and maintain Certified Trash Full Capture Systems, or other treatment control systems, and institutional controls in mutually impacted areas. Mutually impacted areas are those areas where the jurisdictions and trash generation of the Permittee and the California Department of Transportation overlap.
5. Permittees must include the following information in the Trash Implementation Annual Report:
 - a. The type and location of all Certified Trash Full Capture Systems installed for the control of trash within their jurisdiction;
 - b. A summary of the inspection and maintenance activities related to the Certified Trash Full Capture Systems, including the results of any investigations due to third party complaints;
 - c. Report on interim milestone achievement such as average load reductions per year or other progress to full implementation.;
 - d. A Geographic Information System (GIS) map with the following information:
 - i. Priority Land Uses
 - ii. Designated Land Uses (if any)
 - iii. Equivalent Alternative Land Uses (if any)
 - iv. Drainage Areas
 - v. Total Area and Percentage Area served by Certified Trash Full Capture Systems
 - vi. Type and Location of Proposed Certified Trash Full Capture Systems

D. Track 2

The following requirements apply to Permittees that chose Track 2.

1. Permittees must install, operate, and maintain any combination of Certified Trash Full Capture Systems, multi-benefit projects, other treatment control measures, and/or institutional controls, including trash cleanup activities expressed as trash capture credits. The Permittee may determine the locations, or land uses to implement any combination of controls. Each Permittee shall demonstrate that such combinations achieve FCSE. Each Permittee may determine which controls to implement to achieve compliance with the FCSE requirements.
2. Permittees must evaluate FCSE using an approach, and technically acceptable and defensible assumptions and methods for applying the approach. For example, using the Visual Trash Assessment Approach to evaluate changes or measuring trash removed via conversion rates such as the following:
 - a. One (1) cubic yard of uncompacted mixed municipal solid waste = 300 pounds.¹⁷⁷
 - b. One (1) 30-gallon bag of litter – 20 pounds of trash.¹⁷⁸
3. Permittees must demonstrate achievement of interim milestones such as average load reductions per year or other progress to full implementation.
4. Permittees may request Equivalent Alternate Land Uses to substitute one or more of the Priority Land Uses with alternate land use areas within their jurisdiction that generate(s) rates of trash equivalent to or greater than the Priority Land Use(s) being substituted prior to installation and implementation Certified Trash Full Capture Systems or Full Capture System Equivalency trash controls. The request must be made in writing and is subject to the Executive Officer's approval. The Permittees must demonstrate in the request that the total trash generated in the Equivalent Alternate Land Use(s) is equivalent to or greater than the total trash generated from the Priority Land Use(s) being substituted. Comparative trash generation rates shall be established through the reporting of quantification measures such as street sweeping and catch basin cleanup records; mapping; visual trash presence surveys, such as the "Keep America Beautiful Visible Litter Survey"; or other relevant or applicable information.
5. The Permittee may coordinate activities with the California Department of Transportation to install, operate, and maintain Certified Trash Full

¹⁷⁷ Volume-to-Weight Conversion Factors U.S. Environmental Protection Agency Office of Resource Conservation and Recovery April 2016.

¹⁷⁸ Approximate Average Weight of Items Commonly Found and Their Unit Weight Conversion Keep Arkansas Beautiful (Accessed July 2024) [Note there are some variations on the weight conversions.]

Capture Systems, or other treatment control systems, and institutional controls in mutually impacted areas. Mutually impacted areas are those areas where the jurisdictions and trash generation of the Permittee and the California Department of Transportation overlap.

6. **Trash Implementation Plan.** Each Permittee shall develop and implement a Trash Implementation Plan. Permittees who have already submitted a Trash Implementation Plan do not need to resubmit. Permittees who have submitted a Trash Implementation Plan via SMARTS or directly to the Central Valley Water Board prior to the effective date of the Order shall continue implementing the submitted Trash Implementation Plan. Trash Implementation Plans shall include the following:
- a. A description of the combination of controls selected by the Permittee and the rationale for the selection;
 - b. The rationale for how the combination of controls is designed to achieve Full Capture System Equivalency;
 - c. The rationale for how Full Capture System Equivalency will be demonstrated; and
 - d. **Jurisdictional Map** –A GIS-based jurisdictional Map identifying the following:
 - i. All PLUs, designated land uses and Equivalent Alternate Land Uses discharging to the storm drain network;
 - ii. The corresponding storm drain network;
 - iii. Proposed locations of all Certified Trash Full Capture Systems and where any combination of controls will be implemented that will achieve Full Capture System Equivalency; and
 - iv. Trash levels, using the methodology described in the Visual Trash Assessment Approach¹⁷⁹ or other equivalent trash assessment methodology, for all Priority Land Uses, and for other selected locations or land uses within the Permittee's MS4 jurisdiction if proposing to implement any combination of controls in locations other than the Priority Land Uses.

7. Trash Capture Credits

Permittees may include Trash Capture Credits for trash cleanup activities as a component of Track 2 compliance.

a. Trash Capture Credits Program Overview

Trash capture credits may be applied against FCSE implementation requirements otherwise applicable to the Permittee in accordance with

¹⁷⁹ On-Land Visual Trash Assessments Approach - EOA, Inc. On-Land Visual Trash Assessments [EOA, Inc.](http://eoainc.com) (eoainc.com).

the conditions below. The Central Valley Water Board may reject a portion or all trash capture credits if it is determined that a trash cleanup activity does not meet the requirements in **N1.D.7.b.**

b. Trash Capture Credits Program Conditions

The Permittee must meet all the following conditions to receive trash capture credits:

- i. The Permittee must describe the approach used for determining FCSE, as described in **Attachment C**, and quantify the trash load reduction target that the Permittee must achieve by **2 December 2030** and annually thereafter.
- ii. Trash capture credit can be claimed for participation in waterbody trash cleanup activities within the Jurisdictional Runoff Area (JRA) or if outside the JRA, the [HUC-10](#)¹⁸⁰ watersheds adjacent to the JRA. Participation can be in the form of providing financial, personnel, equipment, or other logistical support for the trash cleanup activity.
- iii. A waterbody trash cleanup proposal does not need to be submitted to the Central Valley Water Board prior to conducting the trash cleanup activities. However, prior to conducting waterbody trash cleanup activities for which trash capture credits will be requested, the Permittee must submit a written notification to Central Valley Water Board MS4 staff (WB-RB5_MS4_stormwater@waterboards.ca.gov) at least ten (10) days prior to the start of cleanup to allow Central Valley Water Board MS4 staff the opportunity to inspect the area where credits will be claimed;
- iv. Trash collected in a waterbody or within 250 feet of a waterbody's top of bank or Ordinary High-Water Mark (OHWM) may be included in the tabulation for trash capture credits. Any trash outside of 250 feet is to be excluded from trash capture credits tabulation.
- v. Trash collected for trash capture credits does not include uncontaminated vegetative debris or soil/sediment not attached to trash, or incidental to the trash removal process;
- vi. Trash capture measurement is to be in units of volume (e.g., cubic yards);
- vii. Trash capture credits are calculated at a 5 to 1 ratio, where every five (5) cubic yards of trash captured will receive one (1) cubic yard

¹⁸⁰ [Link to Water Boards HUC-10 GIS Map:](#)

(<https://gispublic.waterboards.ca.gov/portal/home/webmap/viewer.html?layers=b6c1bab9acc148e7ac726e33c43402ee>)

FCSE credit. If appropriate, the conversion factor for trash capture credits to FCSE must be stated;

- viii. The maximum trash capture credit a Permittee may claim is fifty percent (50%) of FCSE per reporting year;
- ix. Waterbody trash cleanup activities are to be conducted and claimed within the same reporting year (i.e., no “rollover banking”); and
- x. A Permittee’s participation in waterbody trash cleanup activities conducted by other parties may receive trash capture credits provided the waterbody trash cleanup activities otherwise meet the conditions described in this section, and provided that the pro rata share of participation can be clearly accounted for in the reporting requirements prescribed below.
- xi. Photos documenting the physical site(s) conditions before and after a cleanup activity and trash collected shall be retained and available for Central Valley Water Board to review upon request.

c. Monitoring and Reporting Requirements (Trash Capture Credits)

Any permittee requesting trash capture credits shall include the following in the Trash Implementation Annual Report.

- i. The date, GPS location, and the description of the location of the cleanup event, including a map identifying the location of the cleanup, and confirmation that the cleanup event meets **N1.7.b.iv.**;
- ii. Demonstration of the link to watershed with respect to MS4’s Jurisdictional Runoff Area and proximity to the waterbody described in the conditions above;
- iii. A list of the organizations participating in the trash cleanup event with a summary of the Permittee’s and all other organizations’ level of participation;
- iv. The total volume of trash captured/removed during the trash cleanup event and the calculation methodology used;
- v. a tabulation of the amount of trash collected for trash capture credit and trash collected that is not eligible for trash capture credit consistent with calculation methodology of trash capture credits as specified in the Trash Implementation Plan; the tabulation shall include landfill receipts or alternative documentation showing weight or volume of disposal.
- vi. If use of trash capture credits was not included in the Permittee’s Trash Implementation Plan, then appropriate revisions to the Trash Implementation Plan shall be submitted in the next trash implementation annual report.

6. Trash Implementation Annual Report. The Permittees must include the following information in the Trash Implementation Annual Report:

- a. The type and number of treatment control measures, institutional control measures, and/or multi-benefit projects have been used and their locations;
- b. The number of Certified Trash Full Capture Systems installed (if any), their locations, and the individual and cumulative area served by them;
- c. The effectiveness of the total combination of treatment control measures, institutional control measures, and multi-benefit projects employed to achieve Full Capture System Equivalency;
- d. A summary of the inspection and maintenance activities related to the Certified Trash Full Capture Systems, including the results of any investigations due to third party complaints;
- e. Report on interim milestone achievement such as average load reductions per year or other progress to full implementation.
- f. If claiming trash capture credits, the trash implementation annual report must include the information as specified in **N1.D.7.c**; and
- g. A GIS map with the following information:
 - i. Priority Land Uses
 - ii. Designated Land Uses (if any)
 - iii. Equivalent Alternative Land Uses (if any)
 - iv. Drainage Areas
 - v. Total area and percentage area served by Certified Trash Full Capture Systems, multi-benefit projects, other treatment control measures, and/or institutional control measures; and
 - vi. Type and location of proposed Certified Trash Full Capture Systems, multi-benefit projects, other treatment control measures, and/or institutional control measures.

E. Trash Implementation Modifications

1. Modifications to the Permittee's Trash Implementation shall be made in writing and submitted to the Central Valley Water Board Executive Officer for review and approval, as applicable, for items a–e listed below. A modification request shall become effective upon (1) approval by the Executive Officer, or (2) ninety (90) days after submittal if the Executive Officer expresses no objections.

- a. Equivalent Alternative Land Uses (for Track 1 or 2):
 - i. Summary of acreage and associated methodology used to substitute one or more PLUs with equivalent alternate land uses

that generate rates of trash equivalent to or greater than the PLU(s) consisted with N1.C.3 or N1.D.4.

- b. Certified Trash Full Capture System Alternative Hydraulic Calculation Methods or Models (for Track 1 or 2);
 - c. Trash Capture Credits Approach (for Track 2 only);
 - d. Full Trash Capture Equivalency approach (for Track 2 only);
 - i. Including conversion factors and technically acceptable and defensible assumptions and methods for applying the approach to quantify full capture system equivalency.
 - e. Modifications to the Trash Implementation Plan, including interim milestones (for Track 2 only)
- 2.A modification request shall become effective upon (1) approval by the Executive Officer, or (2) ninety (90) days after submittal if the Executive Officer expresses no objections.
- 3.If a Permittee is implementing Track 2 and requesting a modification, then the Permittee must submit an amended TIP with the modifications with the next Trash Implementation Annual Report.

F. Trash Implementation Schedule

The Permittee shall achieve full compliance with the requirements of **Attachment N** as follows:

- 1. **Final Compliance Deadline** –No later than **2 December 2030** or date amended, if amended by the State Water Resources Control Board for the Trash Provisions.
- 2. In the event the Central Valley Water Board's Executive Officer determines that specific land uses or locations generate substantial amounts of trash, the Central Valley Water Board's Executive Officer shall establish a time schedule for full compliance at the designated land use in conjunction with that determination. In no case may the final compliance date in a time schedule for a designated land use be longer than **ten (10) years** from the determination by the Central Valley Water Board Executive Officer to designate a land use or locations as a designated land use.
- 3. For New Permittees, who are not previously covered under a Central Valley Water Board or State Water Board MS4 Permit, after the effective date of the Order, full compliance shall occur within **ten (10) years** of the effective date of designation.
- 4. After the First Compliance Deadline in **N1.F**, each Permittee shall demonstrate attainment of the selected compliance method in the associated Trash Implementation Annual Report for the reporting period.

- a. **Track 1 only:** Confirmation that the Permittee has installed, operated, and maintained Certified Trash Full Capture Systems for all storm drains that capture runoff from the priority land uses, designated land uses (if required by the Executive Officer) and equivalent alternative land use areas (if approved by the Executive Officer) in each Permittee's jurisdiction.
- b. **Track 2 only:** Following the Compliance Deadline, Permittees shall demonstrate compliance, which may be assessed on a five-year average, with FCSE in the End-Term Report.

Attachment O – Notice of Intent to Re-Enroll

ORDER R5-2026-0XXX

NPDES No. CAS0085324

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

AND WASTE DISCHARGE REQUIREMENTS GENERAL PERMIT

FOR

DISCHARGES FROM MUNICIPAL SEPARATE STORM SEWER SYSTEMS

I. PERMITTEE CONTACT INFORMATION (see Instructions)

A. Duly Authorized Representative (First and Last Name)			
B. Title of Duly Authorized Representative			
C. Mailing Address			
D. City	E. County	F. State	G. Zip
H. E-mail address		I. Phone (XXX) XXX-XXXX	
J. Primary Contact Person (First and Last Name)			
K. Title of Primary Contact Person			
L. Mailing Address			
M. City	N. County	O. State	P. Zip
Q. E-mail address		R. Phone (XXX) XXX-XXXX	

II. BILLING CONTACT INFORMATION (Complete this Information **only** if different from Section II.)

A. Name (First and Last Name)			
B. Billing Address			
C. City	D. County	E. State	F. Zip
G. E-mail address		H. Phone (XXX) XXX-XXXX	

III. STORM WATER MANAGEMENT PLAN STATUS

What step (outlined in **Table 3** under **Part V.G.2**) in the development of the Storm Water Management Plan is the MS4 Operator in?

- ☐ Preliminary Prioritization Approach (Step 1b)
- ☐ Assessment & Prioritization/ Methodology Proposed for Reasonable Assurance Analysis (Step 2a)
- ☐ Meet & Confer with Central Valley Water Board staff to provide comments to Permittees (Step 2b)
- ☐ Identifying Strategies & Milestones and Run RAA (Step 3a)
- ☐ Meet & Confer with Central Valley Water Board staff to provide comments to Permittees (Step 3b)
- ☐ Submittal of Draft SWMP (Step 4a)
- ☐ Meet & Confer with Central Valley Water Board staff to provide comments to Permittees (Step 4b)

Date the Central Valley Water Board last approved the Storm Water Management Plan:

Date: _____

IV. 2025-2026 ANNUAL REPORT STATUS

Has the 2025-2026 Annual Report been previously submitted? ☐ Yes ☐ No

If submitted, date the Central Valley Water Board received the 2025-2026 Annual Report.

Date: _____

NOTE: If not submitted, the 2025-2026 Annual Report must be submitted with the NOI to Re-Enroll.

V. CERTIFICATION

This Certification must be signed by a duly authorized representative consistent with the requirements contained in 40 CFR 122.22(a)(3).

"I certify under penalty of law that this document and all attachments were prepared under my direction and supervision in accordance with a system designed to ensure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment for knowing violations. Additionally, I certify that the provisions of the General Permit, including developing and implementing a monitoring program, will be complied with."

A. Printed Name: _____

B. Signature: _____

C. Title: _____

D. Date: _____

VI. FOR CENTRAL VALLEY WATER BOARD STAFF USE ONLY

WDID#	Date NOI Received	Date NOI Processed	Staff Initials
-------	-------------------	--------------------	----------------

**INSTRUCTIONS FOR COMPLETING THE
NOTICE OF INTENT TO RE-ENROLL**

These instructions are intended to help you, the Existing Permittee, to complete the Notice of Intent (NOI) to Re-Enroll form for the Region-wide MS4 Permit (General Permit). **Please type or print clearly when completing the NOI TO Re-Enroll form.** For any field, if more space is needed, submit a supplemental letter with the NOI to Re-Enroll.

Send the completed and signed form to:

Attn: MS4 Program
Central Valley Regional Water Quality Control Board
centralvalleysacramento@waterboards.ca.gov

Section I – Permittee Contact Information

Complete this section with the following Existing Permittee information:

- A. Enter the First and Last Name of the Duly Authorized Representative.
- B. Enter the title of the Duly Authorized Representative.
- C. Enter the street number and street name where general correspondence should be mailed to. A post office box is acceptable.
- D. Enter the city that applies to the mailing address given.
- E. Enter the county that applies to the mailing address given.
- F. Enter the state that applies to the mailing address given.
- G. Enter the zip code that applies to the mailing address given.
- H. Enter the email address of the Duly Authorized Representative.
- I. Enter the daytime telephone number of the Duly Authorized Representative.
- J. Enter the First and Last Name of a Primary Contact.
- K. Enter the title of the Primary Contact.
- L. Enter the street number and street name where general correspondence should be mailed to. A post office box is acceptable.
- M. Enter the city that applies to the mailing address given.
- N. Enter the county that applies to the mailing address given.
- O. Enter the state that applies to the mailing address given.
- P. Enter the zip code that applies to the mailing address given.
- Q. Enter the email address of the Primary Contact.
- R. Enter the daytime telephone number of the Primary Contact.

Section II – Billing Contact Information

Complete this section **only** if different from Section II.

- A. Enter the First and Last Name of the person responsible for billing.
- B. Enter the street number and street name where billing correspondence should be mailed to. A post office box is acceptable.
- C. Enter the city that applies to the billing address.
- D. Enter the county that applies to the billing address.
- E. Enter the state that applies to the billing address.
- F. Enter the zip code that applies to the billing address.
- G. Enter the e-mail address of the person responsible for billing.
- H. Enter the daytime telephone number (XXX-XXX-XXXX) of the person responsible for billing.

Section III – Storm Water Management Plan Status

In this section, the Existing Permittee should indicate whether a Storm Water Management Plan (SWMP) has been developed and that plan has been approved by the Central Valley Water Board.

Under this Order, the Existing Permittee must prepare and submit a SWMP in accordance with the SWMP development timeframes described in **Part V.G.2**. The requirements for developing a Storm Water Management Plan are specified under **Part V. F.3**.

Section IV – 2025-2026 Annual Report Status

In this section, the Existing Permittee should indicate whether the 2025-2026 Annual Report has been submitted to the Central Valley Water Board. If the 2025-2026 Annual Report has been submitted, indicate the date it was submitted. If the 2025-2026 Annual Report has **not** been submitted, it must be submitted with the NOI to Re-Enroll.

Section V – Certification

- A. Enter the First and Last Name of the Duly Authorized Representative.
- B. Enter the signature for the Duly Authorized Representative.
- C. Enter the title of the Duly Authorized Representative.
- D. Enter the date the NOI to Re-Enroll was signed by the Duly Authorized Representative