



California Regional Water Quality Control Board

Los Angeles Region



Linda S. Adams
Cal/EPA Secretary

Recipient of the 2001 Environmental Leadership Award from Keep California Beautiful

320 W. 4th Street, Suite 200, Los Angeles, CA 90013
Phone (213) 576-6600 FAX (213) 576-6640 - Internet Address: <http://www.waterboards.ca.gov/losangeles>

Arnold Schwarzenegger
Governor

June 29, 2009

Mr. Tom Fox
Public Works Director
City of Camarillo
601 Carmen Drive
Camarillo, CA 93010

Dear Mr. Foxx:

GENERAL WASTE DISCHARGE REQUIREMENTS (ORDER NO. 93-010) FOR SPECIFIED DISCHARGES TO GROUNDWATER – CITY OF CAMARILLO, CALIFORNIA (CI-9514, File No. 09-067)


We have completed our review of your application, which includes the May 5, 2009 Report of Waste Discharge (ROWD) submitted by Blois Construction, Incorporated on behalf of the City of Camarillo (hereafter the Discharger) for the discharge of groundwater produced during the Springville 54" Irrigation Waterline Relocation Project.

The project consists of building a new diversion water pipeline running approximately parallel to the existing pipeline to accommodate a future freeway off-ramp. The project is located south of the 101 Freeway alongside Ventura Boulevard between Bajo Aqua Avenue and the Camarillo Town Center in Camarillo, California (Figure 1). The property is currently undeveloped land that is used in general as agricultural land for crops and the surface gently slopes to the southwest at about 0.007 feet/feet. The installation of a new pipeline requires excavation below the local water table. The trenches to be excavated will be about 9 feet wide and vary in depth from 12 to 14 feet. The new pipeline will be approximately 3,500 feet long and will be the same size (54") and elevation (10 to 11 feet below ground level) as the existing pipeline.

The construction dewatering will be achieved by a well point dewatering system. Shallow dewatering wells will be placed along the trench 10 feet apart for the length of approximately 600 feet. They will be activated as the trenching progresses to depress groundwater to eight inches below the trench sub-grade in the pipeline area. Each dewatering well will be about 20 feet deep, and will flow between three to four gallons per minute depending on the location of the well. Roughly 50 wells will be connected together by a vacuum manifold and will be pumped in concert. The dewatering discharge will be continuously during the six month life of the project. The maximum estimated total flow rate of the dewatering is 90 gallons per minute (gpm) continuously. The groundwater will be discharged to a 17-acres undeveloped former agriculture site. As construction progresses, the dewatering wells from the start will be removed while new wells will be jetted ahead of the progress.

California Environmental Protection Agency

*** The energy challenge facing California is real. Every California needs to take immediate action to reduce energy consumption***
For a list of simple ways to reduce demand and cut your energy costs, see the tips at: <http://www.swrdb.ca.gov/news/echalleng.html>



Our mission is to preserve and enhance the quality of California's water resources for the benefit of present and future generations.

Wastewater from the sub-grade of the trench will be handled by a sump pump. A sump within the trench will be over excavated and a submersible pump in the sump will pump out water from the trench. The dewatering activity is estimated to last approximately six months beginning in June and ending in December of 2009.

The pumped groundwater from the wells and the sump pump will be collectively discharged to a settlement tank for primary settling to remove suspended solids. Then it will be discharged through a sprinkler system onto an adjacent site (approximately 17 acres) south of the pipeline.

Blois Construction Inc. will be the construction company that will execute the project. Based on a letter, dated June 22, 2009, from the construction company, Blois Construction field superintendent will continuously monitor the discharge throughout the construction and take action to modify the dewatering activities and implemented Storm Water pollution Prevention Plan as necessary to prevent any run-off from the discharge site at all time, including raining season.

This 17-acres site was previously used for discharge of groundwater from other project (Ventura Boulevard Extension Project). The Project Extension utilized 50-60 wells at a depth of 30 feet which produced up to 400 gallons per minute. No run-off has been reported or observed during the May 29, 2009 inspection.

The Water Quality Control Plan, Los Angeles Region, has established groundwater quality objectives for the Oxnard Plain, Confined Aquifer. The water quality objectives are 1,200 milligram per liter (mg/L) for total dissolved solids (TDS), 600 mg/L for sulfate, 150 mg/L for chloride, and 1.0 mg/L for boron.


Groundwater samples collected at boring GW1 on June 13, 2008 indicated that the total TDS is 2,620 mg/L, sulfate 1,600 mg/L, chloride 170 mg/L, boron 1.72 mg/L, and nitrate 45 mg/L.

Waste Discharge Requirement (E.6.) of Board Order No 93-010 states: "Wastewater discharged to groundwater shall maintain the existing water quality, even if that existing water quality exceeds established objectives. A determination shall be made by the Executive Officer as to the applicability of water quality standards with regard to the "Statement of Policy with Respect to Maintaining High Quality of Water in California", with each discharge, on a site – specific basis".

Based on the results of the site specific groundwater samples collected from boring GW1, it is expected that the proposed discharge will exceed the water quality objectives for TDS, sulfate, chloride, and boron at the subject area. The exceedance of water quality objectives is attributed to the natural water quality of the Confined Aquifer. During the dewatering activity the Discharger will not be using groundwater in any activity that will result in the addition or incorporation of new pollutants. Groundwater will be pretreated to remove settleable and suspended solids and discharges will be controlled through sprinkler system irrigation. The groundwater will be discharged over the same aquifer where the naturally occurring TDS, sulfate, chloride and boron exceed water quality objectives. As a result, the discharge is not

California Environmental Protection Agency

*** The energy challenge facing California is real. Every California needs to take immediate action to reduce energy consumption***
For a list of simple ways to reduce demand and cut your energy costs, see the tips at: <http://www.swrdb.ca.gov/news/echalleng.html>



Our mission is to preserve and enhance the quality of California's water resources for the benefit of present and future generations.

Mr. Tom Fox
City of Camarillo

- 3 -

June 29, 2009
CI-9514

considered to be a threat to existing water quality, will not threaten existing beneficial uses of the local groundwater, and will be returned to the same formation from which it was withdrawn.

The discharge of groundwater to surface waters under a National Pollutant Discharge Elimination System permit is not possible because the Discharger will not be able to meet effluent limits for surface water discharge. In addition, there is no sanitary sewer available in close proximity to the site. Finally, this is considered to be a short term duration discharge that will last for approximately six months.

Therefore, based on the information provided and information gathered during the site inspection on May 29, 2009, Regional Board Executive Officer has determined that the proposed discharge meets the conditions specified in Order No. 93-010 "General Waste Discharge Requirements for Specified Discharges to Groundwater in Santa Clara River and Los Angeles River Basins" adopted by this Board on January 25, 1993.

Enclosed are your Waste Discharge Requirements consisting of Regional Board Order No. 93-010, and Monitoring and Reporting program No. CI-9514. The Monitoring and Reporting Program requires you to implement the monitoring program on the effective date of this Order. All monitoring reports should be sent to the Regional Board, ATTN: Information Technology Unit. When submitting monitoring and technical reports to the Regional Board per these requirements, please include a reference to "Compliance File No. CI-9514", which will assure that the reports are directed to the appropriate file and staff. Do not combine other reports with your monitoring reports. Submit each type of report as a separate document.

We are sending Board Order No. 93-010 only to the applicant. A copy of the Order will be furnished to anyone who requests it.

If you have any questions regarding this matter, please contact Project Manager, Mr. Orlando H. Gonzalez at (213) 620-2267 or Unit Chief, Dr. Rebecca Chou at (213) 620-6156.

Sincerely,




Tracy J. Egoscue
Executive Officer

Enclosures:

1. General WDR Board Order No. 93-010
2. Monitoring and Reporting Program No. CI-9514
3. Priority Pollutants list

California Environmental Protection Agency

*** The energy challenge facing California is real. Every California needs to take immediate action to reduce energy consumption***
For a list of simple ways to reduce demand and cut your energy costs, see the tips at: <http://www.swrdb.ca.gov/news/echalleng.html>



Our mission is to preserve and enhance the quality of California's water resources for the benefit of present and future generations.

Mr. Tom Fox
City of Camarillo


- 4 -

June 29, 2009
CI-9514

cc: Mr. Kurt Souza, Cal. DPH, Region 5 - So Cal. Branch, Drinking Water Field Operation
Mr. Jeffrey L. Stone, Cal. DPH, Division of Drinking Water and Environmental
Management, Recycled Water Unit
Mr. Ronald C. Coons, Director, Ventura County Public Works Agency
Mr. James Evans, Ventura County Environmental Health Division, Liquid Waste
Ms. Melinda Talent, Ventura County Environmental Health Division, Land Use Unit
Mr. Ken Matsuoka, City of Camarillo
Mr. Dave Mirones, Blois Construction, Inc.
Mr. Craig Blois, Blois Construction, Inc.


California Environmental Protection Agency

****** The energy challenge facing California is real. Every California needs to take immediate action to reduce energy consumption******
******For a list of simple ways to reduce demand and cut your energy costs, see the tips at: <http://www.swrdb.ca.gov/news/echalleng.html>******

 Recycled Paper

Our mission is to preserve and enhance the quality of California's water resources for the benefit of present and future generations.


VICINITY MAP – Springville Irrigation Water Main Relocation

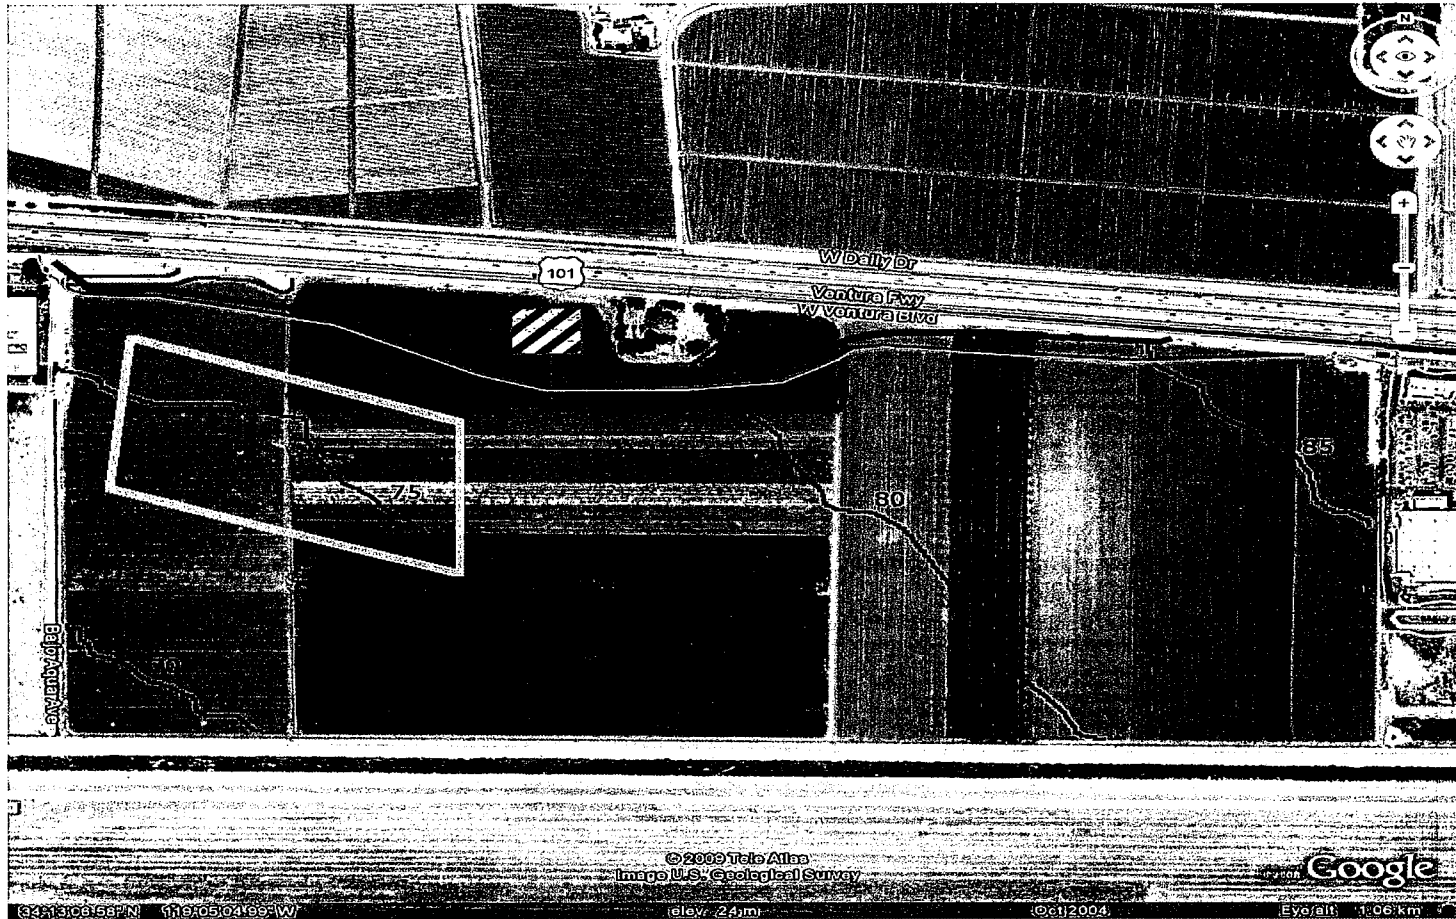


LEGEND:


 - Construction Site Perimeter

 - Existing Drainage Channel

 - Proposed Irrigation Water Main

 - Contour Lines

 - Silt Fence

 - Sand Bags

 - Dewatering Discharge Area

 - Staging Area

Blois Construction, Inc - Springville Irrigation Waterline Project

Camarillo, California, United States

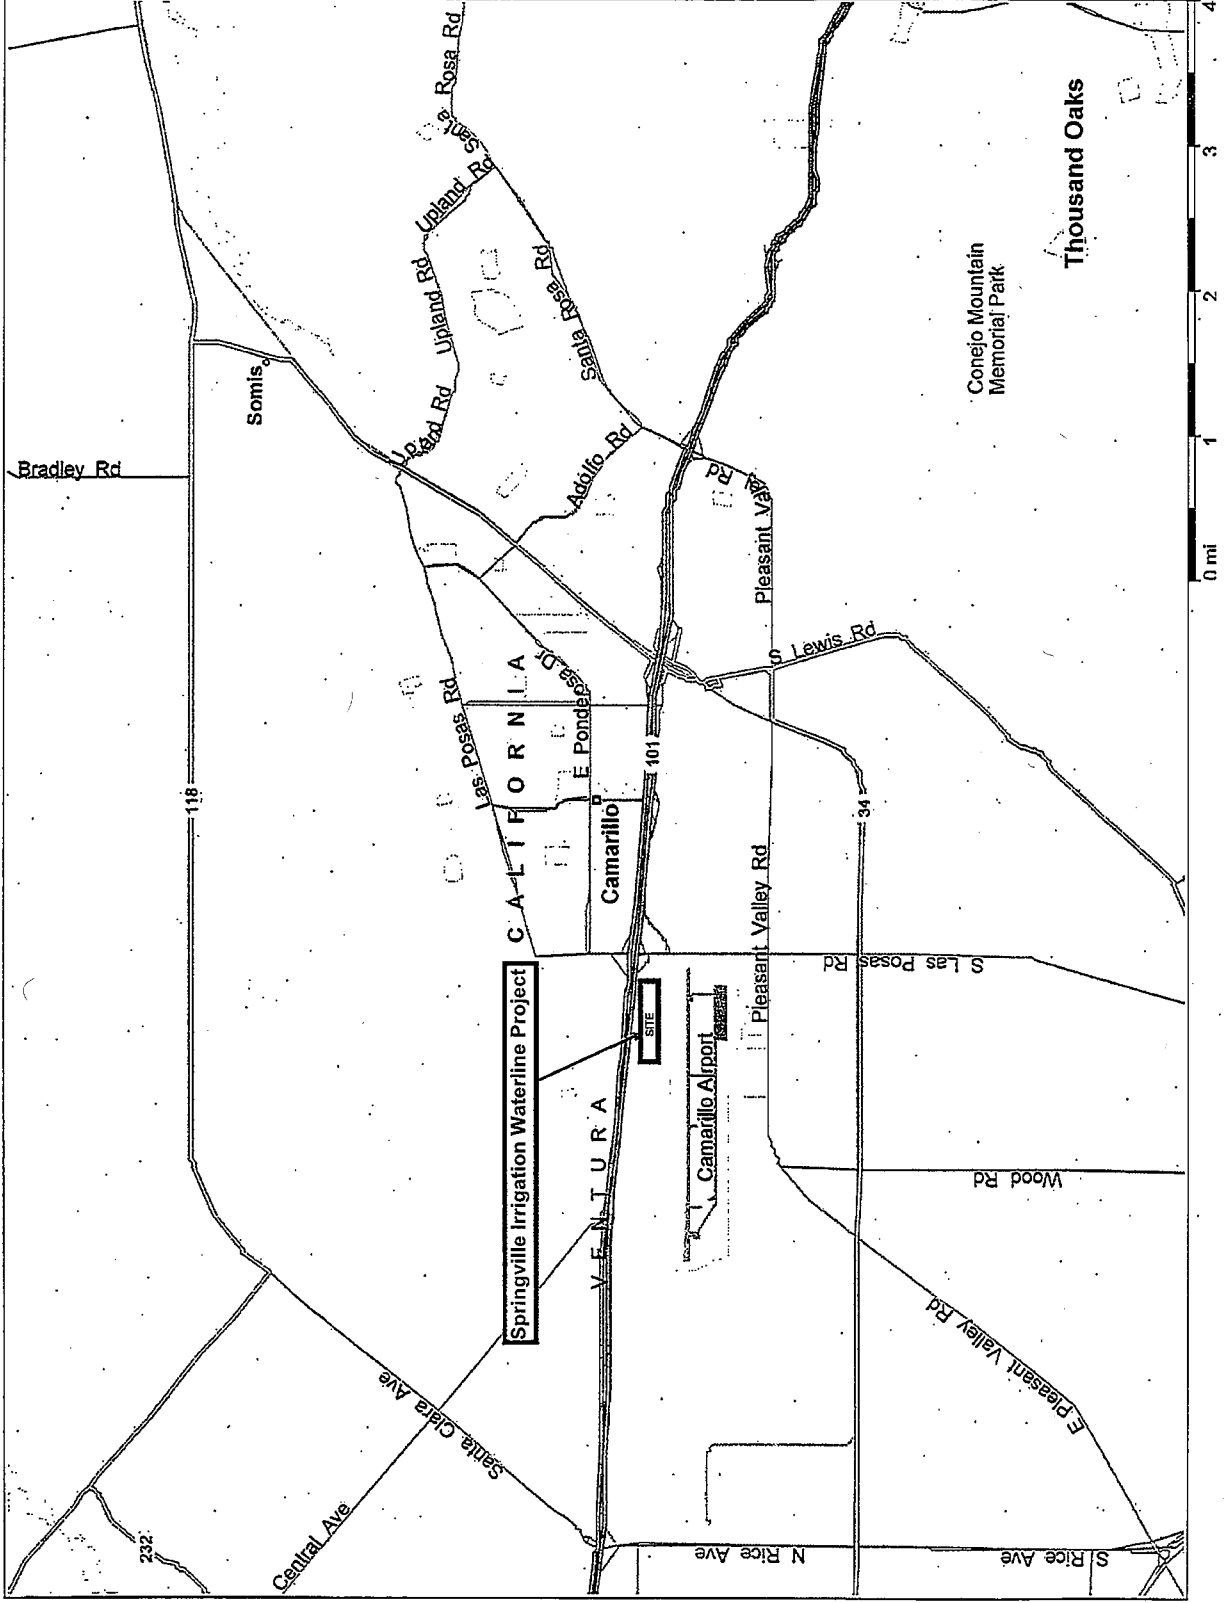


Figure 1

**State of California
CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
LOS ANGELES REGION**

ORDER NO. 93-010

**GENERAL WASTE DISCHARGE REQUIREMENTS
FOR SPECIFIED DISCHARGES TO GROUNDWATER
IN
SANTA CLARA RIVER AND LOS ANGELES RIVER BASINS
File No. 92-60**

The California Regional Water Quality Control Board, Los Angeles Region (hereinafter Regional Board), finds:

1. The California Water Code, Section 13260 of Chapter 4, Article 4, requires that any person discharging wastes, or proposing to discharge wastes, which could affect the quality of the waters of the State, shall file a Report of Waste Discharge with the Regional Board. The Regional Board will then prescribe requirements as to the nature of the proposed or existing discharge.
 2. A number of activities carried on within the Region result in the discharge of water that, because of its characteristics, results in little or no pollution when discharged to groundwater. Examples of these activities include:
 - a) hydrostatic testing of tanks, pipes, and storage vessels;
 - b) construction dewatering;
 - c) dust control application;
 - d) water irrigation storage systems;
 - e) subterranean seepage dewatering;
 - f) well development and test pumping;
 - g) aquifer testing; and
 - h) monitoring well construction.
- The following discharges are specifically excluded from this list: water produced from seawater extraction or wastewater treatment, reclaimed water, and water to be injected directly into an aquifer.
3. The water discharged from these activities results in discharges of relatively "clean" wastewater, containing few pollutants. For the purposes of this Order, "wastewater" is defined as high quality wastewater, produced as a result of the above-listed specified activities, and other similar activities. It is of a quality acceptable for use under State Department of Health Services standards and the Regional Board's Water Quality Control Plan.
 4. These discharges occur in a manner where they will likely, through recharge or percolation, enter the groundwater and may therefore, be considered a waste discharge which could affect the quality of the waters of the State, and for which a Report of Waste Discharge must be filed under Water Code Section 13260.

January 6, 1993

5. Each month, this Regional Board receives a large number of requests to discharge water from the activities listed in Finding 2 above, and for other similar activities. For each such request, staff must determine the absence or presence of significant pollutants in the discharge, the regulatory limits for the pollutants, and the potential impact of the discharge on the waters of the State, and then prepare individual Waste Discharge Requirements.
6. It is anticipated that the large number of such requests will continue to be filed, and far exceed the capacity of staff to review applications and prepare individual Waste Discharge Requirements to bring to the Board for consideration, in a timely manner. These circumstances create the need for an expedited system for processing the numerous requests for discharge to groundwater.
7. The adoption of General Waste Discharge Requirements will:
 - a) simplify the application process for the Discharger,
 - b) expedite the issuance of Waste Discharge Requirements and decrease the regulatory burden on the regulated community,
 - c) free up Board staff for higher priority work, and
 - d) reduce the Board's time involved by enabling the Executive Officer to notify the Discharger, in appropriate cases, of the applicability of these general requirements adopted by the Regional Board.

These General Waste Discharge Requirements would benefit the public, the Board, and Board staff by accelerating the review process without loss of regulatory jurisdiction or oversight.

8. The beneficial uses of groundwater in the Los Angeles River and Santa Clara River Basins may include municipal and domestic supply, agricultural supply, industrial service and process supply, and freshwater replenishment.
9. The Board adopted revised Water Quality Control Plans for the Santa Clara River Basin and Los Angeles River Basin on October 22, 1990, and June 3, 1991, respectively. These Water Quality Control Plans contain water quality objectives for groundwater within the Basins. The requirements contained in this Order, as they are met, will be in conformance with the goals of these Water Quality Control Plans.
10. The State Water Resources Control Board adopted Resolution 68-16, "Statement of Policy With Respect to Maintaining High Quality of Waters in California", on October 28, 1968. This Policy states that wherever the existing quality of water is better than the quality established as objectives or adopted policies, such existing quality shall be maintained.

11. The issuance of General Waste Discharge Requirements for the discharges subject to these general requirements is exempt from the provisions of Chapter 3 (commencing with Section 21100) of Division 13 of the Public Resources Code pursuant to one or more of the following:
- a) The lead agency has prepared an Environmental Impact Report or a negative declaration based on findings pursuant to California Code of Regulations (CCR), Title 14, Chapter 3, Section 15070, which show that there will be no significant impact on water quality.
 - b) The replacement or reconstruction of existing structures will have substantially the same purpose and capacity as the structure replaced as defined in CCR, Title 14, Section 15302.
 - c) The construction of new structures or the conversion of existing small structures will have only minor modifications in the exterior of the structure as defined in CCR, Title 14, Section 15303.
 - d) The activity will cause only minor alterations to land as defined in CCR, Title 14, Section 15304.
 - e) Minor alterations in land use will not result in any changes in land use or density as defined in CCR, Title 14, Section 15305.
12. These General Waste Discharge Requirements are not intended to alter or supersede existing restrictions or conditions imposed by other government agencies.

The Board has notified interested agencies and concerned persons of its intent to adopt General Waste Discharge Requirements for specified discharges to groundwater, and has provided them with an opportunity to submit their written views and recommendations.

The Board, in a public meeting, heard and considered all comments pertaining to the tentative requirements.

IT IS HEREBY ORDERED that the Dischargers authorized under this order shall comply with the following:

A. ELIGIBILITY

1. The General Waste Discharge Requirements, contained in this Order, will regulate discharges to groundwater from: hydrostatic testing of tanks, pipes and storage vessels; construction dewatering; dust control application; water irrigation storage systems; subterranean seepage dewatering; well development and test pumping; aquifer testing; monitoring well construction; and other similar discharges, in accordance with the California Code of Regulations.

To qualify for coverage under this Order, the Discharger may be required to:

- a) submit specific hydrogeological site studies summarizing the following: regional and local hydrogeology, a site plan designating structures and operations, descriptions and details of representative water supply and monitoring wells, and water conveyance systems, soil engineering analyses of representative earth materials including site lithology, permeability, infiltration data, and any potential adverse impacts on groundwater.
 - b) demonstrate that the discharge meets the criteria set forth herein, and that specified discharges to groundwater will not adversely impact the overall quality of the regional and local groundwater basin(s), and is in accordance with the appropriate Basin Plan Water Quality Objectives, State Department of Health Services (DHS) Primary and Secondary Drinking Water Standards, and all water quality standards associated with Priority Pollutants.
 - c) demonstrate that disinfectants, if used, will not adversely impact water quality in the groundwater basin(s).
2. The discharge must not adversely impact the overall quality of the regional and local groundwater basins, must not adversely affect beneficial uses, and must have water quality characteristics in accordance with Basin Plan Water Quality Objectives, State Department of Health Services' (DHS) Primary and Secondary Drinking Water Standards, and all water quality standards associated with Priority Pollutants.

B. APPLICABILITY

1. This Order will serve as General Waste Discharge Requirements for specified discharges to groundwater.
2. Upon receipt of the Report of Waste Discharge describing such discharge, the Executive Officer shall determine, as applicable, if such discharge,

- a) involves wastewater at limits lower than, or equal to, the acceptable levels of the Basin Plan Water Quality Objectives, the State DHS Primary and Secondary Drinking Water Standards, and all water quality standards associated with Priority Pollutants,
 - b) will be completed within a time frame stated by the Discharger and approved by the Executive Officer,
 - c) has been adequately characterized by hydrogeologic assessment,
 - d) is not a threat to water quality,
 - e) does not cause the degradation of groundwater, and
 - f) does not threaten or impair any designated beneficial uses of such waters.
3. In the event the Executive Officer so finds, he shall notify the Discharger, in writing, that the proposed wastewater discharge to groundwater is subject to this Order. Appropriate cases may also be brought to the Board for adoption of individual requirements when the Executive Officer deems it desirable or necessary.
4. Should individual Waste Discharge Requirements with more specific requirements be issued to a Discharger, the applicability of these general requirements to the individual will be automatically terminated on the effective date of the individual Waste Discharge Requirements.

C. REPORT OF WASTE DISCHARGE

1. Deadline for Submission

All Dischargers shall file a Report of Waste Discharge at least 120 days before start of the discharge. The Executive Officer will determine the applicability of General Waste Discharge Requirements.

2. Failure to Submit a Report of Waste Discharge

Dischargers who fail to file a Report of Waste Discharge under Section 13260 of the California Water Code are guilty of a misdemeanor and may be liable civilly in accordance with Section 13261(b) of the California Water Code.

D. PROHIBITION

1. Discharge of wastewater is prohibited, except as specified in the Report of Waste Discharge.

E. WASTE DISCHARGE REQUIREMENTS

IT IS HEREBY ORDERED that the Discharger shall comply with the following:

1. Only those types of discharges specifically listed in the Report of Waste Discharge are authorized to be discharged by the General Waste Discharge Requirements.
2. Wastewater shall be analyzed, prior to discharge, to determine if it contains constituents in excess of the appropriate Basin Plan Water Quality Objectives, as listed in Tables 1 and 2 of Attachment "A".

Hydrologic and groundwater basin boundaries are included in Figures 1 and 2 of Attachment "A".
3. Wastewater shall be analyzed, prior to discharge, to determine that it does not contain constituents in excess of the Maximum Contaminant Levels (MCL) as listed in the State DHS Primary and Secondary Drinking Water Standards in Attachment "B".
4. Wastewater shall be analyzed, prior to discharge, to determine the concentrations of the chemical constituents listed in the Priority Pollutants exhibited in Attachment "B".
5. Wastewater which contains any constituent in excess of the MCL's, the Drinking Water Standards, or the Priority Pollutant standards, listed herein, shall not be discharged to groundwater.
6. Wastewater discharged to groundwater shall maintain the existing water quality, even if that existing water quality exceeds established objectives. A determination shall be made by the Executive Officer as to the applicability of water quality standards with regard to the "Statement of Policy With Respect to Maintaining High Quality of Waters in California", with each discharge, on a site-specific basis.
7. Neither the treatment nor discharge of wastewater shall cause a condition of pollution or nuisance.

8. The pH of wastewater discharged to groundwater, under this Order, shall at all times be within the range of 6.0 and 9.0 pH units.
9. Wastewater to be discharged to groundwater, under this Order, shall be retained on the areas of use, and shall not be allowed to escape as surface flow, except as provided in a National Pollutant Discharge Elimination System (NPDES) permit uniquely applicable to the specified discharge. For the purpose of this requirement, however, minor amounts of irrigation return water from peripheral areas shall not be considered a violation of this Order.
10. Wastewater discharged to groundwater shall be discharged at the site in accordance with these requirements, and only on property owned or controlled by the Discharger.
11. Wastewater which does not meet each of the foregoing requirements shall be held in impervious containers, and if transferred elsewhere, the final discharge shall be at a legal point of disposal, and in accordance with the provisions of Division 7.5 of the California Water Code. For the purpose of these requirements, a legal point of disposal is defined as one for which Waste Discharge Requirements have been established by a California Regional Water Quality Control Board, and which is in full compliance therewith.
12. Wastewater discharged to groundwater shall not contain any substance in concentrations toxic to human, animal, plant, or aquatic life.
13. Wastewater discharged to groundwater shall not impart tastes, odors, color, foaming, or other objectionable characteristics to the receiving groundwater.
14. Neither disposal nor handling of wastes shall cause a condition of pollution or nuisance or problems due to breeding of mosquitos, gnats, midges, flies or other pests.
15. The temperature of discharged wastewater shall not exceed 100°F.

F. PROVISIONS

1. A copy of this Order shall be maintained at the discharge facility and shall be available at all times to operating personnel.

2. In the event the Discharger is unable to comply with any of the conditions of this Order due to:
 - (a) Breakdown of equipment,
 - (b) Accidents caused by human error or negligence,
 - (c) Other causes such as acts of nature,
 - (d) Facility operations,the Discharger must notify this Board, by telephone, within 24 hours of the incident, and confirm it in writing within one week of the telephone notification.
3. In accordance with Section 13260(c) of the California Water Code, the Discharger shall file a report with this Regional Board of any material change or proposed change in the character, location and/or volume of the discharge.
4. In accordance with Section 13267(b) of the California Water Code, the Discharger shall furnish, under penalty of perjury, technical monitoring program reports; such reports shall be submitted in accordance with specifications prepared by the Executive Officer.
5. The Regional Board and other authorized representatives shall be allowed:
 - (a) Entry upon premises where a regulated facility or activity is located or conducted, or where records are kept under the conditions of this Order;
 - (b) Access to copy any records that are kept under the conditions of this Order;
 - (c) To inspect any facility, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Order; and
 - (d) To photograph, sample, and monitor for the purpose of assuring compliance with this Order, or as otherwise authorized by the California Water Code.
6. In accordance with Section 13263(e) of the California Water Code, these Waste Discharge Requirements are subject to periodic review and revision by this Regional Board.
7. These requirements, prescribed herein, do not authorize the commission of any act, by the Discharger, which causes injury to the property of another, do not protect the Discharger from his/her liabilities under Federal, State, or local laws, and do not guarantee the Discharger a capacity right in the receiving groundwater.

8. If hazardous or toxic materials or hydrocarbons are stored at the facility and the facility is not monitored at all times, a 24-hour emergency response telephone number shall be prominently posted where it can be easily discerned.

G. MONITORING REQUIREMENTS

1. The Executive Officer may prescribe a Monitoring and Reporting Program for each authorized Discharger; applicable parameters limited in the discharge shall be monitored as specified by the Executive Officer in the Monitoring and Reporting Program.
2. The Discharger shall retain records of all monitoring information and data used to complete the Report of Waste Discharge for at least three years from the date of sampling, measurement, report, or application. The retention period shall be extended during the course of any unresolved litigation regarding the discharge, or when requested by the Regional Board.
3. The Discharger shall maintain all sampling, measurement and analytical results, including: the date, exact place, and time of sampling or measurement; the individual(s) who performed the sampling or measurement; the date(s) analyses were performed; analysts' names; and analytical techniques or methods used.
4. Representative samples of the discharge shall be taken prior to discharging to the groundwater.
5. All chemical and bacteriological analyses shall be conducted at a laboratory certified for such analyses by the State of California Department of Health Services. The laboratory performing the analyses must follow all applicable QA/QC protocols.
6. The Discharger shall calibrate and perform maintenance procedures on all monitoring instruments and equipment to insure accuracy of measurements, or shall insure that both activities will be conducted.

H. REPORTING REQUIREMENTS

1. The Discharger shall file with the Regional Board (Attention: Technical Support Unit) technical reports on self-monitoring work performed according to the Monitoring and Reporting Program specified by the Executive Officer, and submit other reports as requested by the Regional Board.

2. In reporting the monitoring data, the Discharger shall arrange the data in tabular forms such that the date, constituents, and concentrations are readily discernable. The data shall be summarized to demonstrate compliance with Waste Discharge Requirements.
3. All records and reports submitted to the Regional Board are public documents and will be made available for inspection by the public during normal business hours at the Regional Board office located at 101 Centre Plaza Drive in Monterey Park.
4. For every item where the requirements are not met, the Discharger shall submit a statement of the actions undertaken, or proposed, which will bring the discharge into full compliance with requirements at the earliest time, and submit a timetable for correction.
5. Each monitoring report must affirm in writing that:
"All analyses were conducted at a laboratory certified for such analyses by the State of California Department of Health Services, and in accordance with current EPA guideline procedures or as specified in this Monitoring Program."
6. Each report shall contain the following completed declaration:
"I declare under penalty of law that I have personally examined, and am familiar with, the information submitted in this document and all attachments, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. [CWC Sections 13263, 13267, and 13268]"
7. In the event that wastes, associated with the discharge under this Order, are transported to a different disposal site, the following shall be reported in the monitoring report: type and quantity of wastes; name and address of hauler (or method of transport if other than by hauling); and, location of the final point(s) of disposal.
8. In the event of any changes of subject land ownership or subject waste discharge facility currently owned or controlled by the Discharger, the Discharger shall notify the succeeding owner or operator of the existence of this Order in writing. A copy of the document shall be signed by the new owner accepting responsibility for this Order and shall be forwarded to this Regional Board.

General Waste Discharge Requirements
Discharge to Groundwater
Order No. 93-010

File No. 92-60

9. The Discharger shall notify this Regional Board, within 24 hours, by telephone, of any adverse condition resulting from this discharge, and such notification shall be affirmed in writing within seven calendar days.

I. EXPIRATION DATE AND CONTINUATION OF EXPIRED GENERAL WASTE DISCHARGE REQUIREMENTS

It is the Board's intent to review this Order within five (5) years of its adoption.

I, Robert P. Ghirelli, Executive Officer, do hereby certify that the foregoing is a full, true and correct copy of an Order adopted by the California Regional Water Quality Control Board, Los Angeles Region, on January 25, 1993.



ROBERT P. GHIRELLI, D.Env.
Executive Officer

Attachment "A"

**Groundwater Water Quality Objectives
Santa Clara River (4A)
Los Angeles River (4B)**

**Hydrologic Boundaries, CRWQCB-LA
Fig 1, Principal Surface Waters
Fig 2, Principal Ground Waters**

Water Quality Objectives for Ground Waters Santa Clara River Basin (4A)				
Area	Objective in mg/L			
	TDS	Sulfate	Chloride	Boron
Rincon Creek Hydrologic Unit ^a	None Specified (n/s)			
Ventura River Hydrologic Unit	None Specified (n/s)			
Ojai Hydrologic Area (HA)				
Upper Ojai Hydrologic Subarea (HSA)				
West of Sulphur Mtn Rd	1,000	300	200	1.0
East of Sulphur Mtn Rd	700	50	100	1.0
Ojai HSA ^b				
West of San Antonio-Senior Cyn Creek	1,000	300	200	0.5
East of San Antonio-Senior Cyn Creek	700	200	50	0.5
Upper Ventura River HA				
San Antonio Creek Area	1,000	300	100	1.0
Remainder of ground water basin	800	300	100	0.5
Lower Ventura River HA ^c	None Specified			
Santa Clara-Calleguas Hydrologic Unit				
Upper Santa Clara HA				
Acton HSA	600	150	100	1.0
Eastern HSA				
Above Bouquet Cyn ^d	800	150	150	1.0
Above Castaic Creek to Bouquet Cyn ^e	900	300	150	1.0
South Fork of Santa Clara River Area	1,300	800	100	0.5
Placerita Cyn Area	700	150	100	0.5
Castaic Creek to Blue Cut ^f	1,500	700	150	1.0
Bouquet HSA	400	50	30	0.5
Mint Cyn HSA	700	150	100	0.5
Sierra Pelona HSA	600	100	100	0.5
Piru HA				
Santa Felicia HSA (Piru Subarea)				
East of Piru Creek ^g	2,500	1,200	200	1.5
West of Piru Creek ^h	1,200	600	100	1.5
Upper Piru HSA	1,100	400	200	2.0
Hungry Valley HSA	500	150	50	1.0
Stauffer HSA	1,000	300	20	2.0
Sespe HA				
Fillmore HSA				
Pole Creek Fan underlying City of Fillmore	2,000	800	100	1.0
South Side of Santa Clara River	1,500	800	100	1.1
Remainder of ground water basin	1,000	400	50	0.7
Topa Topa HSA (Sespe Subarea)	900	350	30	2.0
Santa Paula HA				
Santa Paula HSA				
East of Peck Rd	1,200	600	100	1.0
West of Peck Rd	2,000	800	110	1.0
Sisar HSA	700	250	100	0.5
Oxnard Plain HA				
Oxnard HSA				
Oxnard Forebay	1,200	600	150	1.5
Deep aquifers underlying pressure area	1,200	600	150	1.5
Semiperched aquifer ⁱ	3,000	1,000	500	n/s

<u>Water Quality Objectives for Ground Waters</u> <u>Santa Clara River Basin (4A)</u>				
<u>Area</u>	<u>Objective in mg/L</u>			
	<u>TDS</u>	<u>Sulfate</u>	<u>Chloride</u>	<u>Boron</u>
Oxnard Plain HA (continued from previous page)				
Pleasant Valley HSA				
Fox Cyn Aquifer	1,200	600	150	1.0
Grimes Cyn Aquifer	1,200	600	150	1.0
Upper Aquifer ^l	None Specified			
Calleguas-Conejo HA				
West Las Posas HSA	900	350	150	1.0
East Las Posas HSA ^k				
NW of Grimes Cyn Rd, L.A. Avenue and Somis Rd	700	300	100	0.5
East of Grimes Cyn Rd and Hitch Blvd	2,500	1,200	400	3.0
South of L.A. Ave between Somis Rd and Hitch Blvd	1,500	700	250	1.0
Isolated basin near Grimes Cyn Rd and Broadway Rd	250	30	30	0.2
Arroyo Santa Rosa HSA	900	300	150	1.0
Conejo Valley HSA	800	250	150	1.0
Tierra Rejada Valley HSA	700	250	100	0.5
Gillibrand HSA	900	350	50	1.0
Simi Valley HSA				
Deep aquifers	1,200	600	150	1.0
Shallow aquifer ^l	None Specified			
Thousand Oaks HSA	1,400	700	150	1.0

..... Endnotes

- a. Upper aquifers are of very poor quality and not used for domestic, agricultural, or industrial water supply in any significant quantity. Water quality in shallow aquifers shall be maintained at existing levels in accordance with "Resolution 68-16". This is to be accomplished on case-by-case basis as part of the requirements imposed upon dischargers to the shallow aquifers.
- b. Excludes aquifer in Bouquet Canyon and tributaries.
- c. Shallow alluvial aquifer is of very poor quality and not used. Water quality in shallow aquifer shall be maintained at existing levels in accordance with "Resolution 68-16". This is to be accomplished on a case-by-case basis as part of the requirements imposed upon dischargers to the shallow aquifer.
- d. See endnote b.
- e. Includes aquifer in Bouquet Canyon and tributaries but excludes aquifer in Castaic Creek and the South Fork of Santa Clara River and tributaries.
- f. Includes aquifer in Castaic Creek and tributaries.
- g. Includes aquifer in Piru Creek and tributaries.
- h. Excludes aquifer in Piru Creek and tributaries.
- i. Semiperched aquifer is generally of poor quality, but locally may be used for agricultural and domestic purposes in northwestern parts of the Oxnard Plain. Where shallow well or drainage ditch waters clearly exceed these objectives, requirements should be set on a case-by-case basis according to "Resolution 68-16".
- j. See endnote a.
- k. Some isolated wells along Los Angeles Avenue in the Arroyo Las Posas flood plain have higher mineral levels. Requirements for these areas should be set on a case-by-case basis according to "Resolution 68-16".
- l. See endnote a.

Water Quality Objectives for Ground Waters Los Angeles River Basin (4B)				
Area	Objective in mg/L			
	TDS	Sulfate	Chloride	Boron
<u>Malibu Hydrologic Unit</u>				
Topanga Hydrologic Area (HA)	2,000	500	500	2.0
Malibu Creek Hydrologic Subarea (HSA)	2,000	500	500	2.0
Las Virgenes HSA	2,000	500	500	2.0
Lindero Canyon HSA	2,000	500	500	2.0
Triunfo Canyon HSA	2,000	500	500	2.0
Russell Valley HSA	1,500	500	250	1.0
Sherwood HSA	1,000	250	250	1.0
Point Dume HA	1,000	250	250	1.0
Camarillo HA	1,000	250	250	1.0
<u>Los Angeles-San Gabriel River Hydrologic Unit</u>				
<u>Coastal Plain HA</u>				
West Coast Basin	800	250	250	1.5
Santa Monica Basin	1,000	250	250	0.5
Hollywood Basin	750	100	100	1.0
Central Basin	700	250	250	1.0
<u>San Fernando HA</u>				
Sylmar Basin	600	150	100	0.5
Eagle Rock Basin	800	150	100	0.5
Verdugo Basin	600	150	100	0.5
San Fernando Basin-Overall	800	300	100	1.5
Narrows Area ^a	900	300	150	1.5
Foothill Wells Area ^b	400	100	50	1.0
Headworks Area ^c	700	300	100	1.5
North Hollywood-Burbank Area ^d	600	250	100	1.5
<u>Raymond HA</u>				
Monk Hill HSA	450	100	100	0.5
Pasadena HSA	450	100	100	0.5
Santa Anita HSA	450	100	100	0.5
<u>San Gabriel Valley HA</u>				
Puente Basin ^e	1,000	300	150	1.0
Main San Gabriel Basin-Overall	550	150	100	1.0
Westerly Portion ^f	450	100	100	0.5
Easterly Portion ^g	600	100	100	0.5
<u>Spadra Hydro HA</u>				
Spadra HSA	550	200	120	1.0
Pomona HSA	300	100	50	0.5
Live Oak HSA	450	150	100	0.5
Anaheim HA	1,000	250	250	1.0
<u>San Pedro Channel Island Hydrologic Unit</u>				
Santa Catalina HA	1,000	250	250	1.0
San Clemente Island HA	no significant sources			
Santa Barbara Island HA	no significant sources			
<u>Santa Ana River Hydrologic Unit</u>				
Middle Santa Ana River HA	220	50	50	0.5

.....Endnotes

- a. Narrows Area is defined as that area of the San Fernando Basin adjacent to the Los Angeles River lying south of Verdugo Wash.
- b. Foothill Wells is the main extraction area in the Sudiand-Tujunga Area.
- c. Headworks Area is that area lying adjacent to the Los Angeles River upstream of the confluence with Verdugo Wash encompassing in general the City of Los Angeles' Headworks, Crystal Springs, and Verdugo wells and the City of Glendale's wells among others.
- d. The North Hollywood-Burbank Area refers to the principal extraction area which includes the City of Burbank's wells, and the City of Los Angeles, North Hollywood, Erwin, and Whitnall wells among others.
- e. The Puente Basin lies adjacent to San Jose Creek upstream of the Puente Narrows. The Puente Basin and the Puente Narrows are described in the Judgment of the Upper San Gabriel Valley Municipal Water District versus City of Alhambra et al No.924128.
- f. The westerly portion of the Main San Gabriel Basin which lies west of Walnut Creek, Big Dalton Wash, and Little Dalton Wash.
- g. The easterly portion of the Main San Gabriel Basin which lies east of Walnut Creek, Big Dalton Wash, and Little Dalton Wash but does not include the Puente Basin.


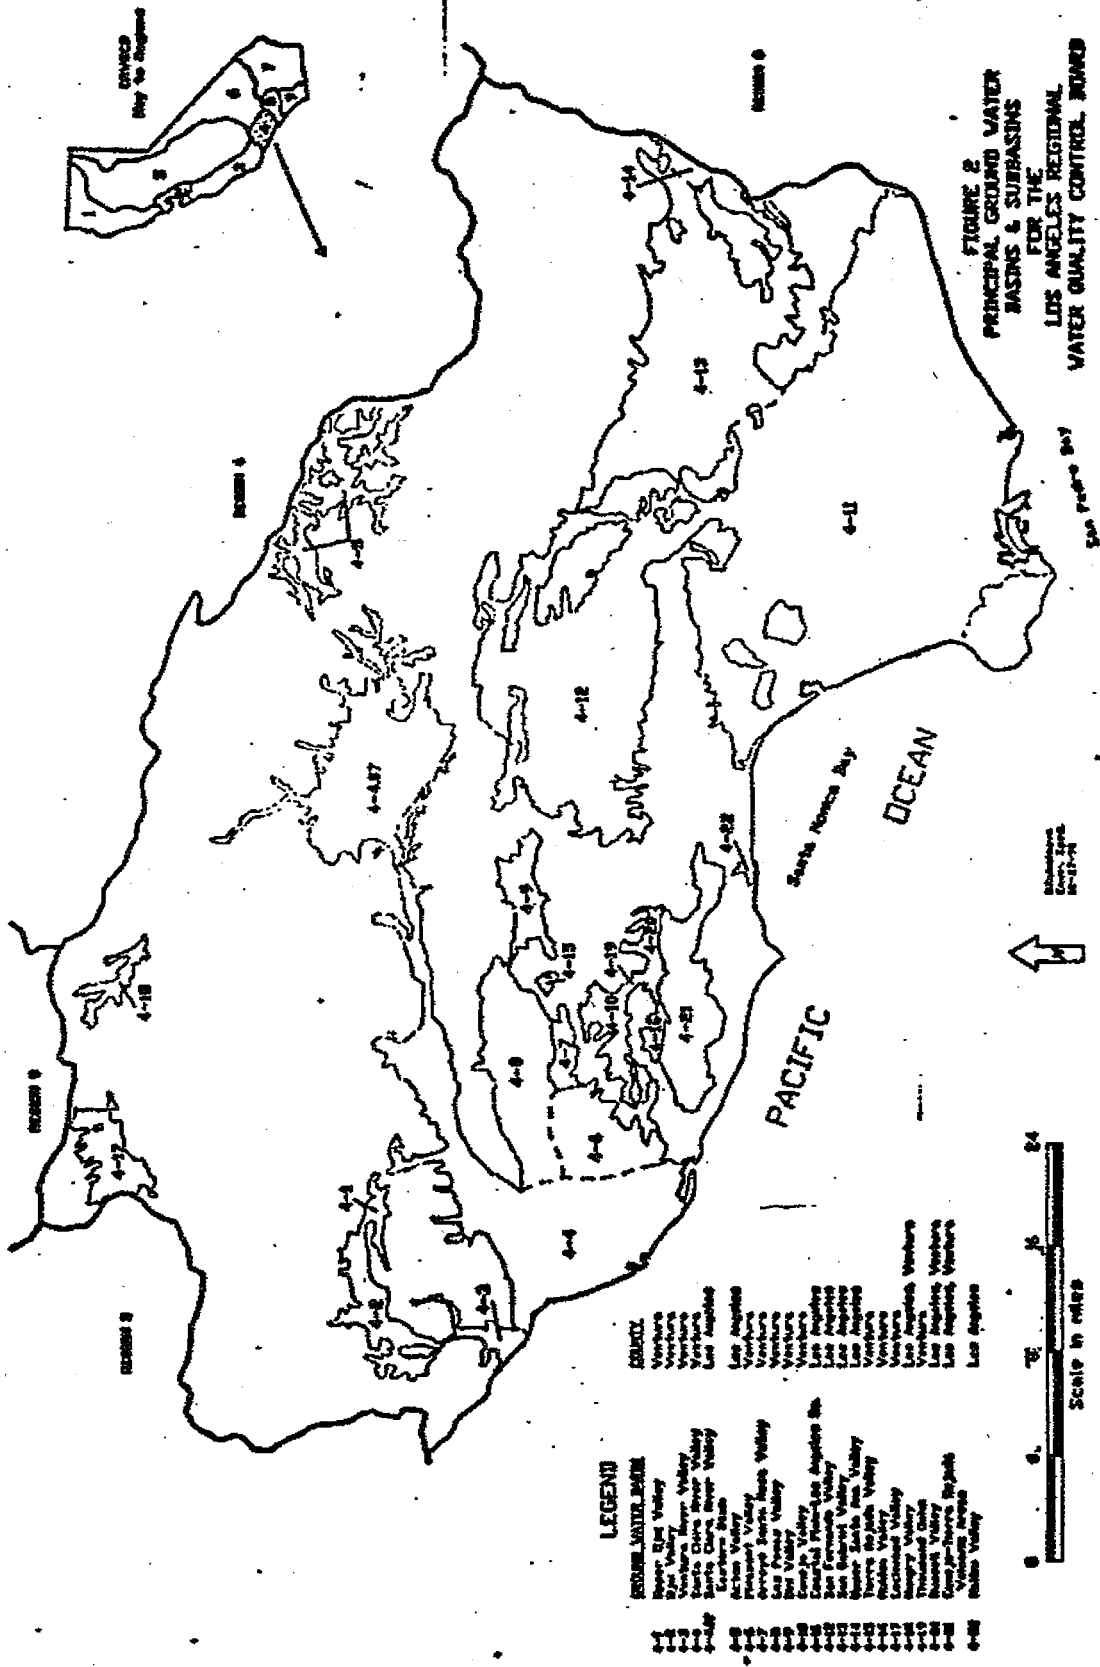


FIGURE 2
PRINCIPAL GROUND WATER
BASINS & SUBBASINS
FOR THE
LOS ANGELES REGIONAL
WATER QUALITY CONTROL BOARD


LEGEND

- | | | | |
|------|--------------------|-------|-------------|
| 4-1 | San Gabriel Valley | 4-101 | Los Angeles |
| 4-2 | San Gabriel Valley | 4-102 | Los Angeles |
| 4-3 | San Gabriel Valley | 4-103 | Los Angeles |
| 4-4 | San Gabriel Valley | 4-104 | Los Angeles |
| 4-5 | San Gabriel Valley | 4-105 | Los Angeles |
| 4-6 | San Gabriel Valley | 4-106 | Los Angeles |
| 4-7 | San Gabriel Valley | 4-107 | Los Angeles |
| 4-8 | San Gabriel Valley | 4-108 | Los Angeles |
| 4-9 | San Gabriel Valley | | |
| 4-10 | San Gabriel Valley | | |
| 4-11 | San Gabriel Valley | | |
| 4-12 | San Gabriel Valley | | |
| 4-13 | San Gabriel Valley | | |
| 4-14 | San Gabriel Valley | | |
| 4-15 | San Gabriel Valley | | |
| 4-16 | San Gabriel Valley | | |
| 4-17 | San Gabriel Valley | | |
| 4-18 | San Gabriel Valley | | |



PACIFIC OCEAN
 San Pedro Bay
 Santa Monica Bay

UNITED
 States of America

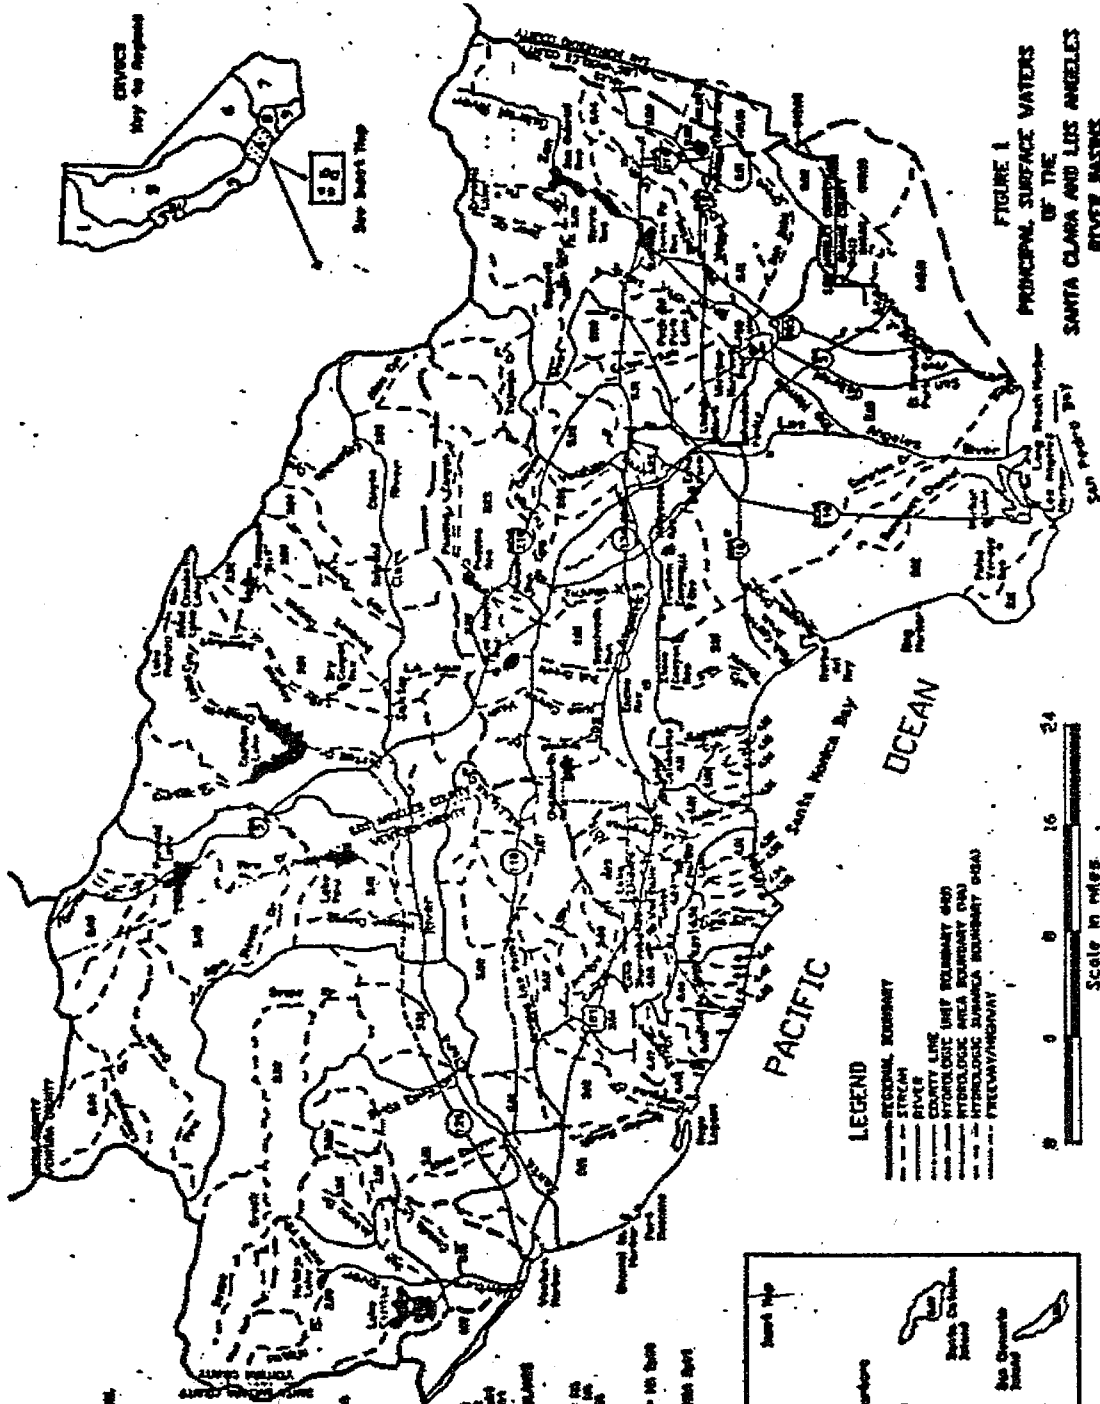

REGION 4 INDEX

- 0400 SAN JOAQUIN RIVER BASIN
- 0401 San Joaquin River
- 0402 San Joaquin River
- 0403 San Joaquin River
- 0404 San Joaquin River
- 0405 San Joaquin River
- 0406 San Joaquin River
- 0407 San Joaquin River
- 0408 San Joaquin River
- 0409 San Joaquin River
- 0410 San Joaquin River
- 0411 San Joaquin River
- 0412 San Joaquin River
- 0413 San Joaquin River
- 0414 San Joaquin River
- 0415 San Joaquin River
- 0416 San Joaquin River
- 0417 San Joaquin River
- 0418 San Joaquin River
- 0419 San Joaquin River
- 0420 San Joaquin River
- 0421 San Joaquin River
- 0422 San Joaquin River
- 0423 San Joaquin River
- 0424 San Joaquin River
- 0425 San Joaquin River
- 0426 San Joaquin River
- 0427 San Joaquin River
- 0428 San Joaquin River
- 0429 San Joaquin River
- 0430 San Joaquin River
- 0431 San Joaquin River
- 0432 San Joaquin River
- 0433 San Joaquin River
- 0434 San Joaquin River
- 0435 San Joaquin River
- 0436 San Joaquin River
- 0437 San Joaquin River
- 0438 San Joaquin River
- 0439 San Joaquin River
- 0440 San Joaquin River
- 0441 San Joaquin River
- 0442 San Joaquin River
- 0443 San Joaquin River
- 0444 San Joaquin River
- 0445 San Joaquin River
- 0446 San Joaquin River
- 0447 San Joaquin River
- 0448 San Joaquin River
- 0449 San Joaquin River
- 0450 San Joaquin River
- 0451 San Joaquin River
- 0452 San Joaquin River
- 0453 San Joaquin River
- 0454 San Joaquin River
- 0455 San Joaquin River
- 0456 San Joaquin River
- 0457 San Joaquin River
- 0458 San Joaquin River
- 0459 San Joaquin River
- 0460 San Joaquin River
- 0461 San Joaquin River
- 0462 San Joaquin River
- 0463 San Joaquin River
- 0464 San Joaquin River
- 0465 San Joaquin River
- 0466 San Joaquin River
- 0467 San Joaquin River
- 0468 San Joaquin River
- 0469 San Joaquin River
- 0470 San Joaquin River
- 0471 San Joaquin River
- 0472 San Joaquin River
- 0473 San Joaquin River
- 0474 San Joaquin River
- 0475 San Joaquin River
- 0476 San Joaquin River
- 0477 San Joaquin River
- 0478 San Joaquin River
- 0479 San Joaquin River
- 0480 San Joaquin River
- 0481 San Joaquin River
- 0482 San Joaquin River
- 0483 San Joaquin River
- 0484 San Joaquin River
- 0485 San Joaquin River
- 0486 San Joaquin River
- 0487 San Joaquin River
- 0488 San Joaquin River
- 0489 San Joaquin River
- 0490 San Joaquin River
- 0491 San Joaquin River
- 0492 San Joaquin River
- 0493 San Joaquin River
- 0494 San Joaquin River
- 0495 San Joaquin River
- 0496 San Joaquin River
- 0497 San Joaquin River
- 0498 San Joaquin River
- 0499 San Joaquin River
- 0500 San Joaquin River

Attachment "B"

**State Department of Health Services
Primary Drinking Water Standards
Secondary Drinking Water Standards**

Priority Pollutants

Attachment "B": Drinking Water Standards and Priority Pollutants

State DHS Primary Drinking Water Standards, Maximum Contaminant Level (MCL)		MCL		MCL	
Constituent	MCL	Constituent	MCL	Constituent	MCL
Organic compounds, MCL units of milligrams per liter (mg/L)					
1,1-Dichloroethane (1,1-DCA)	0.005	1,1-Dichloroethane (1,1-DCA)	0.006	1,1-Dichloroethylene (1,1-DCE)	
1,1,1-Trichloroethane (1,1,1-TCA)	0.200	1,1,1-Trichloroethane (1,1,1-TCA)	1.2	1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	
1,1,2-Trichloroethane (1,1,2-TCA)	0.032	1,1,2-Trichloroethane (1,1,2-TCA)	0.001	1,1,2,2-Tetrachloroethane	
1,2-Dichloroethane (1,2-DCA)	0.0005	1,2-Dichloroethane (1,2-DCA)	0.005	1,2-Dichloropropane	
1,3-Dichloropropane	*a	1,3-Dichloropropane	*a	1,3-Dichloropropane	
1,4-Dichlorobenzene (p-DCB)	0.005	1,4-Dichlorobenzene (p-DCB)	0.1	2,4-D	
2,4,5-TP (Silvex)	0.05	2,4,5-TP (Silvex)	0.003	Atrazine (Aatrex)	
Bentazon (Basagran)	0.018	Bentazon (Basagran)	0.001	Benzene	
*a Bromodichloromethane	*a	Bromodichloromethane	*a	Bromoform	
Carbofuran (Furadan)	0.018	Carbofuran (Furadan)	0.0005	Carbon tetrachloride	
Chlordane	0.0001	Chlordane	0.030	Chlorobenzene (Monochlorobenzene)	
*a Chloroform	*a	Chloroform	0.006	cis-1,2-Dichloroethylene	
Di(2-ethylhexyl)phthalate (DEHP)	0.004	Di(2-ethylhexyl)phthalate (DEHP)	*a	Dibromochloromethane	
Dibromochloropropane (DBCP)	0.0002	Dibromochloropropane (DBCP)	0.0002	Endrin	
Ethylbenzene (Phenylethane)	0.680	Ethylbenzene (Phenylethane)	0.00002	Ethylene dibromide (EDB)	
0.7 Glyphosate	0.7	Heptachlor epoxide	0.00001	Heptachlor epoxide	
0.00001 Heptachlor	0.00001	Heptachlor	0.004	Lindane (gamma-BHC)	
0.1 Methoxychlor	0.1	Methoxychlor	0.02	Molinate (Ordram)	
0.01 Simazine (Princep)	0.005	Tetrachloroethene (PCE)	0.005	Tetrachloroethene (PCE)	
0.07 Thioencarb (Bolero)	0.005	Toxaphene	0.005	Trichloroethene (TCE)	
0.01 trans-1,2-Dichloroethylene	0.005	Trichloroethene (TCE)	0.0005	Vinyl chloride (VC)	
0.15 Trichlorofluoromethane (Freon 11)		Vinyl chloride (VC)	0.0005	Xylenes	
1.75 Xylenes					

Attachment "B": Drinking Water Standards and Priority Pollutants

Priority Pollutants: Acid Extractables	
2,4,Trichlorophenol	p-Chloro-m-Cresol
2,4-Dichlorophenol	2,4-Dimethylphenol
4-Nitrophenol	2,4-Dinitrophenol
Pentachlorophenol	Phenol

Priority Pollutants: Base/Neutral Extractables	
Acenaphthene	Benzdine
Hexachlorobenzene	Hexachloroethane
2-Chloronaphthalene	1,2-Dichlorobenzene
1,4-Dichlorobenzene	3,3'-Dichlorobenzidine
2,6-Dinitrotoluene	1,2-Diphenylhydrazine
4-Chlorophenyl phenyl ether	4-Bromophenyl phenyl ether
Bis (2-chloroethoxy) methane	Hexachlorobutadiene
Isophorone	Naphthalene
N-Nitrosodimethylamine	N-Nitrosodi-n-propylamine
Bis (2-Ethylhexyl) phthalate	Butyl benzyl phthalate
Di-N-octyl phthalate	Diethyl phthalate
Benzo (A) Anthracene	Benzo (A) pyrene
Benzo (K) Fluoranthene	Chrysene
Anthracene	1,12-Benzoperylene
Phenanthrene	1,2,5,6-Dibenzanthracene
Pyrene	TCDD

Priority Pollutants: Pesticides		
Aldrin	Chlordane	Dieldrin
4,4'-DDT	4,4'-DDE	4,4'-DDD
Alpha endosulfan	Beta endosulfan	Endosulfan sulfate
Endrin	Endrin aldehyde	Heptachlor
Heptachlor epoxide	Alpha BHC	Beta BHC
Gamma BHC	Delta BHC	Toxaphene
PCB 1016	PCB 1221	PCB 1232
PCB 1242	PCB 1248	PCB 1254
PCB 1260		

Priority Pollutants: Volatile Organics		
Acrolein	Acrylonitrile	Benzene
Carbon tetrachloride	Chlorobenzene	1,2-Dichloroethane
1,1,1-Trichloroethane	1,1-Dichloroethane	1,1,2-Trichloroethane
1,1,2,2-Tetrachloroethane	Chloroethane	Chloroform
1,1-Dichloroethylene	1,2-Transdichloroethylene	1,2-Dichloropropane
1,2-Dichloropropane	Ethylbenzene	Methylene chloride
Methyl chloride	Methyl bromide	Bromoform
Bromodichloromethane	Dibromochloromethane	Tetrachloroethylene
Toluene	Trichloroethylene	Vinyl chloride
2-Chloroethyl vinyl ether		

Attachment "B": Drinking Water Standards and Priority Pollutants

Priority Pollutants: Metals & Miscellaneous	
Antimony (Sb)	Arsenic (As)
Cadmium (Cd)	Chromium (Cr)
Lead (Pb)	Mercury (Hg)
Selenium (Se)	Silver (Ag)
Zinc (Zn)	Cyanide (CN ⁻)
	Beryllium (Be)
	Copper (Cu)
	Nickel (Ni)
	Thallium (Tl)
	Asbestos (H ₂ Mg ₃ Si ₂ O ₆)

.....Endnote

1. * (DWS note) Unregulated: monitoring required for all community and non-transient, non-community water systems

State of California
CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
LOS ANGELES REGION

MONITORING AND REPORTING PROGRAM NO. CI-9514

for

City of Camarillo

(Springville 54" Irrigation Waterline Relocation)

Enrollment under Regional Board Order No. 93-030 (Series No. 040)

(FILE NO. 09-067)

I. REPORTING REQUIREMENTS

- A. The Discharger shall implement this monitoring program from the effective date of this enrollment (June 29, 2009) under Regional Board order No. 93-010. The first monitoring report under this monitoring program is due by July 15, 2009. Monitoring reports shall be submitted monthly and must be received by the Regional Board by the fifteenth day of the second month following the sampling period. If there is no discharge, the report shall so state. Monitoring reports must be addressed to the Regional Board, Attention: Information Technology Unit.
- B. By January 30 of each year, the Discharger shall submit an annual summary report to the Regional Board. The report shall contain both tabular and graphical summaries of the monitoring data obtained during the previous calendar year. In addition, the discharger shall discuss the compliance record and the corrective actions taken or planned, which may be needed to bring the discharge into full compliance with waste discharge requirements.
- C. Laboratory analysis – all chemical analysis shall be conducted at a laboratory certified for such analyses by the California Department of Health Services Environmental Laboratory Accreditation Program (ELAP). A copy of the laboratory certification shall be provided each time that a new and/or renewal certification is obtained from ELAP.
- D. The method limits (MLs) employed for effluent analyses shall be lower than the permit limits established for a given parameter, unless the discharger can demonstrate that a particular ML is not attainable and obtains approval for a higher ML from the Executive Officer. At least once a year, the discharger shall submit a list of the analytical methods employed for each test and the associated laboratory Quality Assurance/Quality Control (QA/QC) procedures.
- E. Water/wastewater samples must be analyzed within allowable holding time limits as specified in 40 CFR Part 136.3. QA/QC samples must be run on the same dates as the Discharger samples are analyzed. The Discharger shall make available for inspection and/or submit the QA/QC documentation upon request by Regional Board staff.

Proper chain of custody procedures must be followed and a copy of the chain of custody documentation shall be submitted with the report.

June 29, 2009

- F. Each monitoring report must affirm in writing that "All analyses were conducted at a laboratory certified for such analyses by the California Department of Health Services, and in accordance with current United States Environmental Protection Agency (USEPA) guideline procedures or as specified in this Monitoring Program."
- G. For every item where the requirements are not met, the Discharger shall submit a statement of the cause(s), and actions undertaken or proposed which will bring the discharge into full compliance with waste discharge requirements at the earliest possible time, including a timetable for implementation of those actions.
- H. The Discharger shall maintain all sampling and analytical results, including strip charts; date; exact place, and time of sampling; dates analyses were performed; analyst's name; analytical techniques used; and results of all analyses. Such records shall be retained for a minimum of three years. This period of retention shall be extended during the course of any unresolved litigation regarding this discharge, or when requested by the Regional Board.
- I. In reporting the monitoring data, the Discharger shall arrange the data in tabular form so that the date, the constituents, and the concentrations are readily discernible. The data shall be summarized to demonstrate compliance with the requirements and, where applicable, shall include results of receiving water observations.
- J. Any mitigation/remedial activity including any pre-discharge treatment conducted at the site must be reported in the monthly monitoring report.

II. WATER QUALITY MONITORING REQUIREMENTS

- A. Maintenance Reporting: The Discharger shall submit a monthly operation and maintenance report for the facility including the disposal system of the wastewater. The information to be contained in the report shall include, at a minimum, the following:
 - 1. The name and address of the person or company responsible for the operation and maintenance of the facility;
 - 2. Type of maintenance (preventive or corrective action performed);
 - 3. Frequency of maintenance, if preventive;
 - 4. Estimated amount of water used for compaction and for dust control;
 - 5. Description of any change in the dewatering approach, if changed;
 - 6. Verification that there is no runoff from the pumping and discharge systems to surface waters; and
 - 7. Maintenance records for the pumping, discharge, and wastewater disposal system.

- B. Effluent Monitoring: Sampling stations shall be located where representative samples of that discharge ground water from dewatering area can be obtained. The following shall constitute the effluent monitoring program:

<u>Constituent</u> ^[1]	<u>Unit</u> ^[2]	<u>Type of</u> ^[3] <u>Sample</u>	<u>Minimum</u> <u>Frequency</u> <u>of Analysis</u>
Total flow	gal/day	N/A	Daily
pH	pH Units	grab	monthly
Total dissolved solids	mg/L	grab	monthly
Nitrate-nitrogen ^[4]	mg/L	grab	monthly
Nitrite-nitrogen ^[4]	mg/L	grab	monthly
Total Nitrogen ^[4]	mg/L	grab	monthly
Oil and grease	mg/L	grab	monthly
Sulfate	mg/L	grab	monthly
Chloride	mg/L	grab	monthly
Boron	mg/L	grab	monthly
BOD5 20°C	mg/L	grab	monthly
Suspended solids	mg/L	grab	monthly
Turbidity	NTU	grab	monthly
Total and Fecal coliform	MPN/100mL	grab	monthly
Enterococcus	MPN/100mL	grab	monthly
Phosphate	mg/l	grab	monthly
Priority pollutants ^[5]	mg/L	grab	Twice ^[6]

^[1] If any constituent exceeds the baseline water quality data, then the frequency of analyses shall increase to weekly until at least three test results have been obtained and there is no more exceeding constituent, after which the frequency of analyses shall revert to monthly.

^[2] MPN/100mL: Most Probable Number per milliliter; mg/L: milligram per liter

^[3] Samples shall be obtained at the outlet of the treatment system.

^[4] Nitrate + nitrite + ammonia + organic nitrogen as nitrogen

^[5] Priority Pollutants are listed in Attachment A;

^[6] Two effluent samples shall be collected and analyzed during the dewatering operation. One sample shall be collected during the first day of dewatering and the other shall be collected by the last day of the dewatering activities.

III. MONITORING FREQUENCY

Monitoring frequencies may be adjusted to a less frequent basis and/or parameters dropped by the Executive Officer if the Discharger makes a request which is supported by statistical trends of monitoring data.

IV. CERTIFICATION STATEMENT

Each report shall contain the following completed declaration:

"I certify under penalty of law that this document, including all attachments and supplemental information, was prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of a fine and imprisonment.


Executed on the _____ day of _____ at _____

_____(Signature)

_____(Title)"

These records and reports are public documents and shall be made available for inspection during normal business hours at the office of the California Regional Water Quality Control Board, Los Angeles Region.

Ordered by:



Tracy J. Egoscue
Executive Officer

Date: June 29, 2009

ATTACHMENT A

PRIORITY POLLUTANTS

Metals

Antimony
Arsenic
Beryllium
Cadmium
Chromium
Copper
Lead
Mercury
Nickel
Selenium
Silver
Thallium
Zinc

Miscellaneous

Cyanide
Asbestos (only if specifically required)

Pesticides & PCBs

Aldrin
Chlordane
Dieldrin
4,4'-DDT
4,4'-DDE
4,4'-DDD
Alpha-endosulfan
Beta-endosulfan
Endosulfan sulfate
Endrin
Endrin aldehyde
Heptachlor
Heptachlor epoxide
Alpha-BHC
Beta-BHC
Gamma-BHC
Delta-BHC
Toxaphene
PCB 1016
PCB 1221
PCB 1232
PCB 1242
PCB 1248
PCB 1254
PCB 1260

Base/Neutral Extractibles

Acenaphthene
Benzidine
1,2,4-trichlorobenzene
Hexachlorobenzene
Hexachloroethane
Bis(2-chloroethyl) ether
2-chloronaphthalene
1,2-dichlorobenzene
1,3-dichlorobenzene
1,4-dichlorobenzene
3,3'-dichlorobenzidine
2,4-dinitrotoluene
2,6-dinitrotoluene
1,2-diphenylhydrazine
Fluoranthene
4-chlorophenyl phenyl ether
4-bromophenyl phenyl ether
Bis(2-chloroisopropyl) ether
Bis(2-chloroethoxy) methane
Hexachlorobutadiene
Hexachlorocyclopentadiene
Isophorone
Naphthalene
Nitrobenzene
N-nitrosodimethylamine
N-nitrosodi-n-propylamine
N-nitrosodiphenylamine
Bis (2-ethylhexyl) phthalate
Butyl benzyl phthalate
Di-n-butyl phthalate
Di-n-octyl phthalate
Diethyl phthalate
Dimethyl phthalate
Benzo(a) anthracene
Benzo(a) pyrene
Benzo(b) fluoranthene
Benzo(k) fluoranthene
Chrysene
Acenaphthylene
Anthracene
1,12-benzoperylene
Fluorene
Phenanthrene
1,2,5,6-dibenzanthracene
Indeno (1,2,3-cd) pyrene
Pyrene
TCDD

Acid Extractibles

2,4,6-trichlorophenol
P-chloro-m-cresol
2-chlorophenol
2,4-dichlorophenol
2,4-dimethylphenol
2-nitrophenol
4-nitrophenol
2,4-dinitrophenol
4,6-dinitro-o-cresol
Pentachlorophenol
Phenol

Volatile Organics

Acrolein
Acrylonitrile
Benzene
Carbon tetrachloride
Chlorobenzene
1,2-dichloroethane
1,1,1-trichloroethane
1,1-dichloroethane
1,1,2-trichloroethane
1,1,2,2-tetrachloroethane
Chloroethane
Chloroform
1,1-dichloroethylene
1,2-trans-dichloroethylene
1,2-dichloropropane
1,3-dichloropropylene
Ethylbenzene
Methylene chloride
Methyl chloride
Methyl bromide
Bromoform
Dichlorobromomethane
Chlorodibromomethane
Tetrachloroethylene
Toluene
Trichloroethylene
Vinyl chloride
2-chloroethyl vinyl ether
Xylene