

**CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD—  
LOS ANGELES REGION**

101 CENTRE PLAZA DRIVE  
MONTEREY PARK, CA 91754-2156  
(213) 266-7500



April 30, 1991

Peter F. Huntsinger, Owner  
J.P. Enterprises  
23550 Lyons Avenue, Suite 208  
Newhall, CA. 91321

7040

WASTE DISCHARGE REQUIREMENTS - EZ TAKE OUT, ACTON, LOS ANGELES COUNTY (File NO. 90-80)

Our letter of March 27, 1991, transmitted tentative waste discharge requirements for the disposal of domestic waste for the subject facility.


Pursuant to Division 7 of the California Water Code, this California Regional Water Quality Control Board at a public meeting held on April 22, 1991, reviewed these tentative requirements, considered all factors in the case, and adopted Order No. 91-055 (copy attached) relative to the disposal of domestic waste.

The "Monitoring and Reporting Program" requires you to implement the monitoring program on the effective date of the Order. Your first monitoring report is due within 30 days from the commencement of the discharge. All monitoring reports should be sent to the Regional Board, ATTN: Technical Support Unit.

Please reference all technical and monitoring reports to our Compliance File No. 7040. We would appreciate if you would not combine other reports, such as progress or technical, with your monitoring reports but would submit each type or report as a separate document.

As the Board adopted the tentative requirements without changes, we are sending the final copy only to the applicant. For those on the mailing list, please add Order No. 91-055 to the tentative Order previously sent to you. A copy of the final Order as adopted will be furnished to anyone who requests it.

If you have any questions, please call Gregg Kwey at (213) 266-7547.

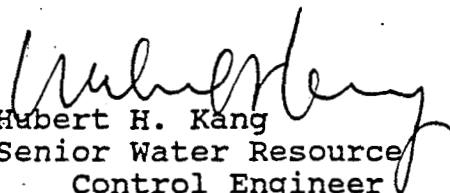  
Hubert H. Kang  
Senior Water Resource  
Control Engineer

F & M Foodservice  
Mailing List

State Water Resources Control Board, Division of Water  
Quality, Attn: Archie Matthews  
Department of Water Resources  
Department of Health Services, Public Water Supply Branch  
South Coast Air Quality Management District  
Los Angeles County, Department of Health Services,  
Environmental Management; Attn: Rod Cavalier  
335-8 East Ave. K-6, Lancaster, Ca. 93535  
Los Angeles County, Department of Public Works, Waste Management  
Division

State of California  
CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD, LOS ANGELES REGION

ORDER NO. 91-055

WASTE DISCHARGE REQUIREMENTS

FOR

J.P. ENTERPRISES  
(EZ TAKE OUT)  
(File No. 90-80)

The California Regional Water Quality Control Board, Los Angeles Region, finds:

1. J.P. Enterprises, a sole proprietorship, (hereinafter called the discharger) has filed a report of waste discharge for the disposal of domestic wastes.
2. The discharger proposes to construct a restaurant at 2211 Sierra Highway, Acton, California. The domestic wastes from the restaurant (up to 1,320 gallons per day) will be discharged into a 1,500 gallon septic tank and a seepage pit (5 feet in diameter and 30 feet in depth).
3. The facility is within the Acton Hydrologic Subarea of the Upper Santa Clara River Hydrologic Subunit of the Santa Clara-Calleguas Hydrologic Unit.
4. The Board adopted a revised Water Quality Control Plan for the Santa Clara River Basin on March 27, 1978. The Plan contains water quality objectives for ground water in the Acton Hydrologic Subarea. The requirements contained in this Order as they are met will be in conformance with the goals of the Water Quality Control Plan.
5. The beneficial uses of ground water in the Acton Hydrologic Subarea are municipal and domestic supply, agricultural supply, industrial service supply, and industrial process supply.
6. The report of waste discharge stated that the discharge to ground water, associated with the use of septic tanks, may impact ground water quality. As a result of this impact, some beneficial uses may be adversely impacted or unattainable.
7. Mitigation measures, submitted by the discharger, propose the installation of dry sewers.
8. Installation of dry sewers, at the time of development, is considered to be an efficient and economical means of

mitigating the long-term effects of septic tanks on ground water. The threat to waters of the State is thereby reduced by preparing for prompt hook-up to a regional collection system should such measures become necessary.

9. The Los Angeles County Department of Regional Planning has prepared a Negative Declaration in accordance with the California Environmental Quality Act (Public Resources Code Section 21000 et seq.) as it has been determined that the project will not have a significant effect on the environment.

The Board has notified the discharger and interested agencies and persons of its intent to adopt waste discharge requirements for this subsurface sewage disposal project and has provided them with an opportunity to submit their written view and recommendations.

The Board in a public meeting heard and considered all comments pertaining to the discharge and the tentative requirements.

IT IS HEREBY ORDERED, that J.P. Enterprises, in order to meet the provisions contained in the California Water Code and regulations adopted thereunder, and the California Code of Regulation adopted thereunder, shall comply with the following:

A. DISCHARGE PROHIBITIONS

1. Wastes discharged shall be limited to domestic sewage only; no water softener regeneration brines or industrial or commercial wastes shall be discharged at this location.
2. There shall be no on-site disposal of sludge. Any off-site disposal of sludge shall be only to a legal point of disposal. For purposes of these requirements a legal disposal site is one for which requirements have been established by a California Regional Water Quality Control Board and which is in full compliance therewith. Any sludge handling shall be in such a manner as to prevent waste from reaching surface waters or watercourses.

B. WASTE DISCHARGE REQUIREMENTS

1. Wastes discharged shall at no time contain any substance in concentrations toxic to human, plant, or aquatic life.
2. The seepage pit system shall be maintained in such a manner that at no time will sewage be permitted to surface or overflow at any location.


3. The seepage pit system shall be protected from damage by storm flows or runoff.
4. Odors of sewage origin shall not be perceivable beyond the limits of the property owned or controlled by the discharger.
5. The septic tanks must be pumped and maintained on a regular basis.
6. Wastes shall not be disposed of in geologically unstable areas or so as to cause earth movement.
7. The discharger shall comply with all rules and regulations of the Los Angeles County Department of Health Services for construction and operation of private sewage disposal systems.
8. Wastes discharged shall not cause the appearance of foam or other indicators of waste disposal in nearby surface waters.

C. PROVISIONS

1. This facility shall be compatible with regional sewage plans.
2. The number of wells, well locations, and installation or replacement of the monitoring wells for this project shall be subject to Executive Officer approval. The proposed monitoring well system shall be submitted to the Executive Officer for approval at least 120 days prior to commencement of discharge.
3. Installation of dry sewers, as proposed, is required for this development. As soon as a community sewer system becomes available, the discharger shall connect the dry sewers to the community sewer system and properly close the private sewage disposal system.
4. The discharger shall submit as-built construction and operation details of the leach field system to the Board for review within 90 days after the system is in place.

5. No part of the seepage pit system shall be closer than 150 feet to any water well or closer than 100 feet to any stream, channel or other watercourse.
6. No part of any seepage pit shall extend to a depth where wastes may deleteriously affect ground water that is usable for domestic purposes and in no case within 10 feet of the zone of fluctuating ground water.
7. Prior to the commencement of discharge, the discharger shall establish a responsible party to comply with this Order and the monitoring and reporting program. This information shall be provided to the Board at least 60 days prior to any use of the private sewage disposal systems.
8. This Order includes "Standard provisions applicable to waste discharge requirements".

I, Robert P. Ghirelli, Executive Officer, do hereby certify that the foregoing is a full, true and correct copy of an Order adopted by the California Regional Water Quality Control Board, Los Angeles Region on April 22, 1991.



ROBERT P. GHIRELLI, D. ENV.  
Executive Officer

State of California  
 CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD, LOS ANGELES REGION  
 MONITORING AND REPORTING PROGRAM 7040

FOR

J.P. ENTERPRISES  
 (EZ TAKE OUT)  
 (File No. 90-80)

The discharger shall implement this monitoring program on the effective date of this order. The first monitoring report under this program is due within 30 days from the commencement of the discharge. Subsequent monitoring reports shall be submitted by the dates in the following schedule:

<u>Reporting Period</u>	<u>Report Due</u>
September-November	December 15
December-February	March 15
March-May	June 15
June-August	September 15

GROUND WATER MONITORING

The discharger shall install suitable and accessible water wells upgradient and downgradient of the leach fields to serve as ground water monitoring stations. The following shall constitute the monitoring program:

<u>Constituent</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Minimum Frequency of Analysis</u>
nitrogen-ammonia	mg/L	grab	monthly <sup>1</sup>
nitrogen-nitrate	mg/L	grab	monthly <sup>1</sup>
nitrogen-nitrite	mg/L	grab	monthly <sup>1</sup>
chloride	mg/L	grab	quarterly
oil & grease	mg/l	grab	quarterly
MBAS	mg/l	grab	monthly <sup>1</sup>
surfactants	mg/l	grab	monthly <sup>1</sup>
total phosphate	mg/L	grab	monthly <sup>1</sup>
total dissolved solids	mg/L	grab	quarterly
sulfate	mg/L	grab	quarterly

---

<sup>1</sup>Following the second quarterly report, Regional Board staff will review and evaluate the data. Monthly analyses will then revert to quarterly, unless otherwise specified by the Executive Officer.

<u>Constituent</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Minimum Frequency of Analysis</u>
total coliform	count/100ml	grab	quarterly
fecal coliform	count/100ml	grab	quarterly
fecal strep	count/100ml	grab	quarterly
calc fecal/strep ratio	-----	----	quarterly

Laboratory analyses must follow methods approved by the United States Environmental Protection Agency (EPA); the laboratory must meet EPA Quality Assurance Quality Control (QAQC) criteria. For surfactants, the methods described in the "Standard Methods for the Examination of Water and Wastewater" 17th edition, must be followed.

#### REPORTING

The reports shall contain the following information:

- a. Ground water monitoring data as specified above. This data shall be submitted to the Regional Board on 3 1/2" or 5 1/4" computer diskette. Submitted data must be IBM compatible, preferably using Lotus123 or dBASE III PLUS software.
- b. Well identification, date and time of sampling, water temperature, depth to ground water (from a standard reference point), sampler identification, laboratory identification, date(s) of analysis.
- c. The average and maximum quantity of discharge for each month of the quarter, in gallons per day.
- d. Estimated population served during each month of the reporting period.
- e. A statement relative to compliance with discharge specifications during the period of report.
- f. In the event that septage is hauled to a legal disposal site, the name and address of the hauler of the septage shall be reported, along with the quantity hauled during the reporting period and the location of the final point of disposal. If no wastes are hauled during the reporting period, a statement to that effect shall be submitted and shall include a statement relative to disposal of septage during the period.