



California Regional Water Quality Control Board  
Los Angeles Region

Rebecca Chou



Linda S. Adams  
Agency Secretary

320 W. 4th Street, Suite 200, Los Angeles, California 90013  
Phone (213) 576-6600 FAX (213) 576-6640 - Internet Address: <http://www.waterboards.ca.gov/losangeles>

Arnold Schwarzenegger  
Governor

November 21, 2008.

Mr. Daryl Pessler  
Risk Management and Remediation  
ConocoPhillips  
P. O. Box 25376  
Santa Ana, CA 92799-5376

**REVISION OF GENERAL WASTE DISCHARGE REQUIREMENTS FOR GROUNDWATER CLEANUP AT PETROLEUM HYDROCARBON FUEL, VOLATILE ORGANIC COMPOUND And/Or HEXAVALENT CHROMIUM IMPACTED SITES – FORMER FAST GAS STATION, 2473 THOUSAND OAKS BOULEVARD, THOUSAND OAKS (ORDER NO. R4-2007-0019, SERIES NO. 030; CI NO. 9313)**


Dear Mr. Pessler:

Our letter dated August 28, 2007, transmitted the general waste discharge requirements (WDRs) for ozone injection at the subject site. On your behalf, your consultant, Stantec Consulting Corporation (Stantec) sent us a request, dated April 10, 2008, to install additional injection points. Stantec proposes the installation of twenty-one ozone injection points in an adjacent Toyota dealership to remediate the off-site extent of the dissolved plume down gradient of the site. Additional groundwater monitoring requirements will result in a revised Monitoring and Reporting Program (see attached).

We have reviewed the information provided and approve your proposal for additional injection points provided that you strictly comply with Order No. R-4-2007-0019 (Serial No. 030), including the revised Monitoring and Reporting Program CI-9313.


If you have any questions concerning this matter, please call Mr. Gregg Kwey at (213) 576-6702 or via email at [gkwey@waterboards.ca.gov](mailto:gkwey@waterboards.ca.gov) or Mr. Joe Luera at (213) 576-6706 or by e-mail at [jluera@waterboards.ca.gov](mailto:jluera@waterboards.ca.gov).

Sincerely,

  
Tracy J. Egoscue  
Executive Officer

cc: Ms. Yvonne Shanks, State Water Resources Control Board, UST Cleanup Fund  
Mr. David Salter, Ventura County Environmental Health Division  
Mr. Hari Patel, State Water Resources Control Board, Underground Storage Tank Cleanup Fund  
Ms. Leslie Bond, Stantec Consulting Corporation

California Environmental Protection Agency



Our mission is to preserve and enhance the quality of California's water resources for the benefit of present and future generations.

STATE OF CALIFORNIA  
CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
LOS ANGELES REGION  
MONITORING AND REPORTING PROGRAM NO. CI-9313  
for  
FORMER FAST GAS STATION  
2473 THOUSAND OAKS BOULEVARD, THOUSAND OAKS  
(OZONE INJECTION FOR GROUNDWATER CLEANUP)  
(ORDER NO. R4-2007-0019, SERIES NO. 030)

I. REPORTING REQUIREMENTS

- A. ConocoPhillips (hereinafter Discharger) shall implement this monitoring program on the effective date of Regional Board Order No. R4-2007-0019. The next monitoring report under this program, for October-December 2008, shall be received at the Regional Board by **January 15, 2009**. Subsequent monitoring reports shall be received at the Regional Board according to the following schedule:

<u>Monitoring Period</u>	<u>Report Due</u>
January – March	April 15
April – June	July 15
July – September	October 15
October – December	January 15

Monitoring reports must be addressed to the regional Board, Attention: Information Technology Unit.

- B. If there is no discharge or injection during any reporting period, the report shall so state.
- C. By January 30 of each year, beginning January 30, 2008, the Discharger shall submit an annual summary report to the Regional Board. The report shall contain both tabular and graphical summaries of the monitoring data obtained during the previous calendar year. In addition, the Discharger shall explain the compliance record and the corrective actions taken, or planned, which may be needed to bring the discharge into full compliance with the waste discharge requirements (WDRs).
- D. Laboratory analyses – all chemical, bacteriological, and toxicity analyses shall be conducted at a laboratory certified for such analyses by the California Department of Health Services Environmental Laboratory Accreditation Program (ELAP). A copy of the laboratory certification shall be provided each time a new and/or renewal certification is obtained from ELAP.

November 21, 2008

- E. The method limits (MLs) employed for effluent analyses shall be lower than the permit limits established for a given parameter, unless the Discharger can demonstrate that a particular ML is not attainable and obtains approval for a higher ML from the Regional Board Executive Officer (Executive Officer). The Discharger shall submit a list of the analytical methods employed for each test and the associated laboratory quality assurance/quality control (QA/QC) procedures upon request by the Regional Board.
- F. Groundwater samples must be analyzed within allowable holding time limits as specified in 40 CFR Part 136. All QA/QC samples must be run on the same dates when samples were actually analyzed. The Discharger shall make available for inspection and/or submit the QA/QC documentation upon request by Regional Board staff.
- G. Each monitoring report must affirm in writing that "All analyses were conducted at a laboratory certified for such analyses by the California Department of Health Services, and in accordance with current United States Environmental Protection Agency (USEPA) guideline procedures or as specified in this Monitoring Program." Proper chain of custody procedures must be followed and a copy of the completed chain of custody form shall be submitted with the report.
- H. Each monitoring report shall contain a separate section titled "Summary of Non-Compliance" which discusses the compliance record and the corrective actions taken or planned that may be needed to bring the discharge into full compliance with WDRs. This section shall be located at the front of the report and shall clearly list all non-compliance with WDRs, as well as all excursions of effluent limitations.
- I. The Discharger shall maintain all sampling and analytical results: date, exact place, and time of sampling; dates analyses were performed; analyst's name; analytical techniques used; and results of all analyses. Such records shall be retained for a minimum of three years. This period of retention shall be extended during the course of any unresolved litigation regarding this discharge, or when requested by the Regional Board.
- J. If the Discharger performs analyses on any groundwater samples more frequently than required by this Order using approved analytical methods, the results of those analyses shall be included in the report.
- K. In reporting the monitoring data, the Discharger shall arrange the data in tabular form so that the date, the constituents, and the concentrations are readily discernible. The data shall be summarized to demonstrate compliance with the requirements and, where applicable, shall include results of receiving water observations.

II. OZONE INJECTION MONITORING REQUIREMENTS

The quarterly reports shall contain the following information regarding injection activities:

1. Location map showing injection points used for the ozone injection. To avoid groundwater monitoring network reduction, data bias, and well screen clogging or alteration, no groundwater monitoring wells shall be used as injection points during the proposed ozone injection. Separate injection points/wells must be installed at the site for the injection; up to twenty-one injection points are currently proposed that can be referenced in the attached Figure 3.
2. Written and tabular summary defining the quantity of ozone injected per month to the groundwater and a summary describing the days on which the injection system was in operation.

III. GROUNDWATER MONITORING PROGRAM

The Discharger shall conduct groundwater monitoring at the site. Groundwater samples shall be collected from upgradient monitoring wells MW-1 and MW-5, source wells MW-19, MW-20, and MW-21 and downgradient wells MW-8, MW-27 and MW-28 to monitor the effectiveness of the in-situ groundwater remediation (refer to attached Figure 3). Ozone injection points shall not be used as monitoring points. Groundwater shall be monitored for the duration of the remediation in accordance with the following discharge monitoring program:

CONSTITUENT	UNITS	TYPE OF SAMPLE	MINIMUM FREQUENCY OF ANALYSIS <sup>1</sup>
Total petroleum hydrocarbons as gasoline (TPHg) and as diesel (TPHd)	µg/L	Grab	• Quarterly
Benzene, Toluene, Ethylbenzene, Xylenes (BTEX)	µg/L	Grab	• Quarterly
Methyl tertiary butyl ether (MTBE), Tertiary butyl alcohol (TBA), Tertiary amyl methyl ether (TAME), Di-isopropyl ether (DIPE), ether (ETBE)	µg/L	Grab	• Quarterly
Ethanol Formaldehyde Acetone	µg/L	Grab	• Quarterly

Total dissolved solids Boron Chloride Sulfate	mg/L	Grab	• Quarterly
Oxidation-reduction potential	millivolts		• Quarterly
Dissolved Oxygen	µg/L	Grab	• Quarterly
Dissolved ferrous iron	µg/L	Grab	• Quarterly
Total Chromium and chromium six <sup>2</sup>	µg/L	Grab	• Quarterly
PH	pH units	Grab	• Quarterly
Temperature	<sup>0</sup> F/ <sup>0</sup> C	Grab	• Quarterly
Groundwater Elevation	Feet, mean sea level and below ground surface	In situ	• Quarterly
<p>1 The first sampling event must be conducted one week following the ozone injection. 2 The Discharger is required to monitor for total chromium and chromium six only if they are detected in the first sampling event.</p>			

All groundwater monitoring reports must include, at a minimum, the following:

- a. Well identification, date and time of sampling;
- b. Sampler identification, and laboratory identification;
- c. Quarterly observation of groundwater levels, recorded to 0.01 feet mean sea level and groundwater flow direction.

#### IV. MONITORING FREQUENCIES

Monitoring frequencies may be adjusted to a less frequent basis or parameters dropped by the Executive Officer if the Discharger makes a request and the Executive Officer determines that the request is adequately supported by statistical trends of monitoring data submitted.

#### V. CERTIFICATION STATEMENT

Each report shall contain the following declaration:

"I certify under penalty of law that this document, including all attachments and supplemental information, was prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted.

Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of a fine and imprisonment.

Executed on the \_\_\_\_\_ day of \_\_\_\_\_ at \_\_\_\_\_.


\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Title)"

VI. PUBLIC DOCUMENTS

These records and reports are public documents and shall be made available for inspection during normal business hours at the office of the California Regional Water Quality Control Board, Los Angeles Region.



Ordered by:

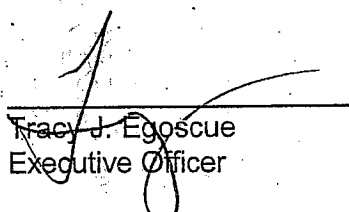  
\_\_\_\_\_  
Tracy J. Egoscue  
Executive Officer

Date: November 19, 2008

**LEGEND:**

- ⊕ MW-1 GROUNDWATER MONITOR WELL
- ⊕ RW-1 RECOVERY WELL
- ⊕ AS/SVE-1 AIR SPARGE/SOIL VAPOR WELL
- ⊕ EW-1 OXYGEN DIFFUSION WELL
- ⊕ MW-17A ABANDONED SOIL BORING
- ⊕ OS-1 - OS-4 OZONE SPARGE WELLS
- ⊕ OS-5 - OS-25 PROPOSED OZONE SPARGE WELLS
- APPROXIMATE PROPERTY BOUNDARY
- PROPOSED TRENCH ROUTE

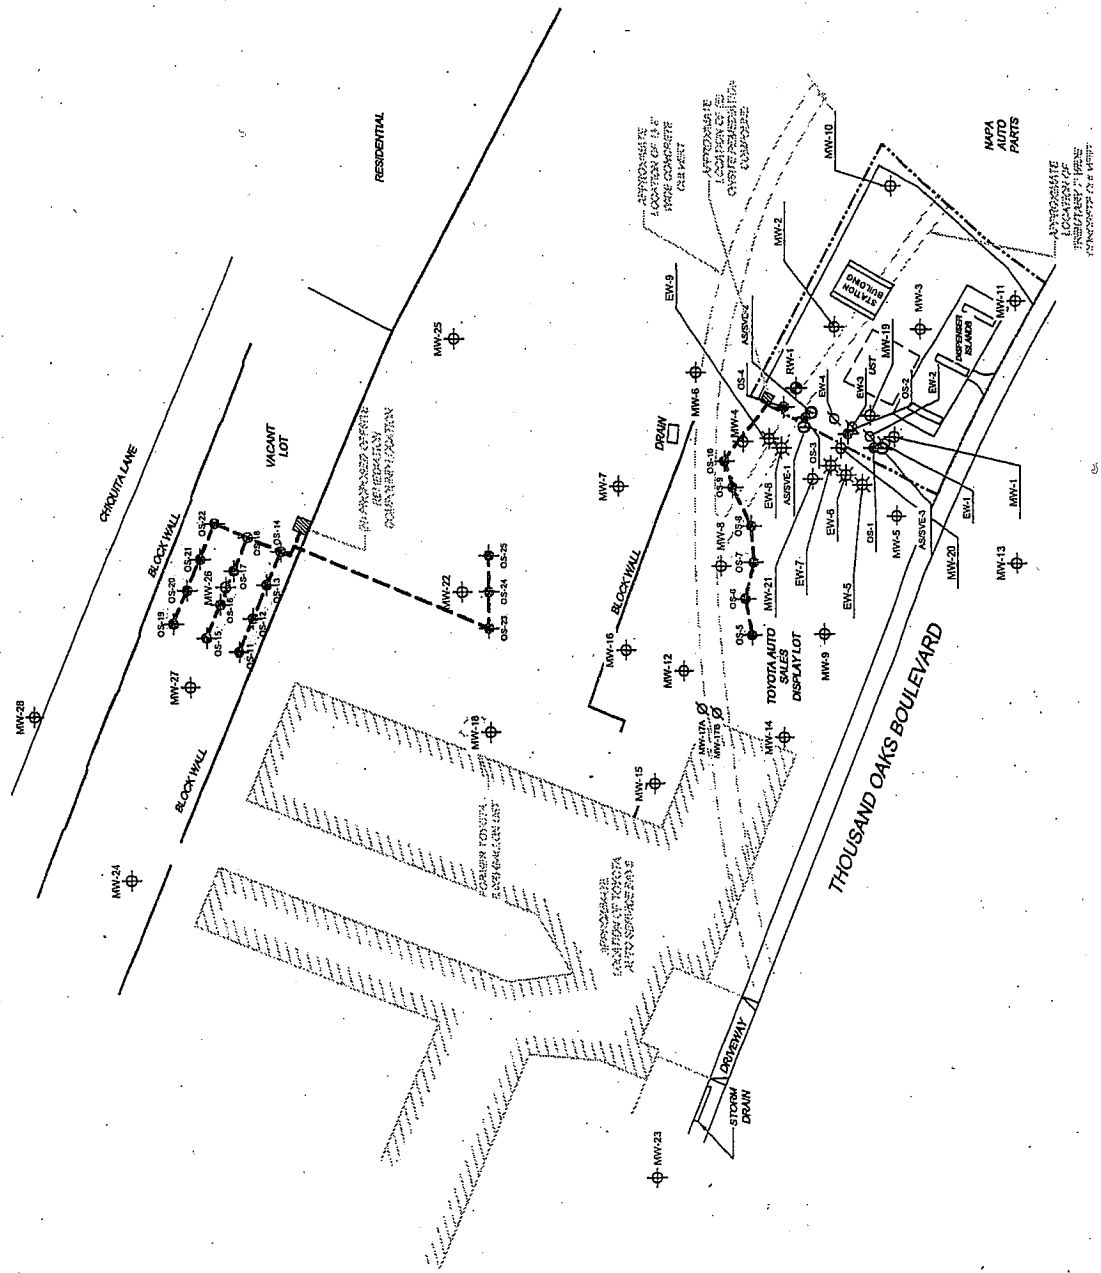

FOR:	FORMER EAST GAS STATION 5762 2473 THOUSAND OAKS BOULEVARD THOUSAND OAKS, CALIFORNIA
JOB NUMBER:	37CP-06371.42
DRAWN BY:	AP
CHECKED BY:	AP
APPROVED BY:	LB
DATE:	1/25/08

**SECOR**  
 3011 KILGORE ROAD, SUITE 100  
 RANCHO CORDOVA, CALIFORNIA  
 PHONE: (916) 861-0685 / 0630 (FAX)  
 WWW.SECORINC.COM

REFERENCE: THIS FIGURE IS BASED ON MAPS BY TRC

FIGURE:	3
<b>EXTENDED SITE PLAN W/ PROPOSED OZONE SPARGE WELLS</b>	