

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD

LOS ANGELES REGION

320 W. 4th Street, Suite 200, Los Angeles, California 90013
Phone (213) 576 - 6600 • Fax (213) 576 - 6640
<http://www.waterboards.ca.gov>

ORDER NO. R4-2010-0018

NPDES NO. CA0064165

WASTE DISCHARGE REQUIREMENTS FOR THE VOPAK TERMINAL LONG BEACH, INCORPORATED

The following Discharger is subject to waste discharge requirements as set forth in this Order:

Table 1. Discharger Information

Discharger	Vopak Terminal Long Beach, Incorporated
Name of Facility	Vopak Terminal Long Beach
Facility Address	3601 Dock Street
	San Pedro, CA 90731
	Los Angeles County
The U.S. Environmental Protection Agency (USEPA) and the Regional Water Quality Control Board have classified this discharge as a minor discharge.	

The discharge by the Vopak Terminal Long Beach, Incorporated from the discharge points identified below is subject to waste discharge requirements as set forth in this Order:

Table 2. Discharge Location

Discharge Point	Effluent Description	Discharge Point Latitude	Discharge Point Longitude	Receiving Water
001	Treated storm water, fire test water, truck rinse water, and condensate water	33° 45' 52.43" N	118° 14' 31.07" W	Cerritos Channel, tributary to Long Beach Inner Harbor

Table 3. Administrative Information

This Order was adopted by the Regional Water Quality Control Board on:	February 4, 2010
This Order shall become effective on:	March 6, 2010
This Order shall expire on:	January 10, 2015
The Discharger shall file a Report of Waste Discharge in accordance with title 23, California Code of Regulations, as application for issuance of new waste discharge requirements no later than:	180 days prior to the Order expiration date

IT IS HEREBY ORDERED, that Order No. R4-2005-0007 is terminated upon the effective date of this Order except for enforcement purposes, and, in order to meet the provisions contained in division 7 of the Water Code (commencing with section 13000) and regulations adopted pursuant thereto, and the provisions of the federal Clean Water Act (CWA) and regulations and guidelines adopted pursuant thereto, the Discharger shall comply with the requirements in this Order.

I, Tracy J. Egoscue, Executive Officer, do hereby certify that this Order with all attachments is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, Los Angeles Region, on February 4, 2010.



Tracy J. Egoscue, Executive Officer

Table of Contents

I.	Facility Information	4
II.	Findings	5
III.	Discharge Prohibitions.....	12
IV.	Effluent Limitations and Discharge Specifications	13
	A. Effluent Limitations – Discharge Point No. 001	13
	B. Land Discharge Specifications – Not Applicable.....	15
	C. Reclamation Specifications – Not Applicable.....	15
V.	Receiving Water Limitations	15
	A. Surface Water Limitations.....	15
	B. Groundwater Limitations – Not Applicable	17
VI.	Provisions	18
	A. Standard Provisions.....	18
	B. Monitoring and Reporting Program (MRP) Requirements	21
	C. Special Provisions.....	21
VII.	Compliance Determination	25
	A. Single Constituent Effluent Limitation	25
	B. Mass-based Effluent Limitations	25
	C. Multiple Sample Data.....	25
	D. Average Monthly Effluent Limitation (AMEL)	25
	E. Maximum Daily Effluent Limitations (MDEL).....	26
	F. Instantaneous Minimum Effluent Limitation	26
	G. Instantaneous Maximum Effluent Limitation	26

List of Tables

Table 1.	Discharger Information	1
Table 2.	Discharge Location	1
Table 3.	Administrative Information.....	1
Table 4.	Facility Information	4
Table 5.	Basin Plan Beneficial Uses	7
Table 6.	Effluent Limitations – Discharge Point No. 001	13
Table 7.	Interim Effluent Limitations	15

List of Attachments

Attachment A – Definitions	A-1
Attachment B – Map	B-1
Attachment C – Flow Schematic.....	C-1
Attachment D – Standard Provisions.....	D-1
Attachment E – Monitoring and Reporting Program (MRP) No. CI 7873.....	E-1
Attachment F – Fact Sheet.....	F-1
Attachment G – Storm Water Pollution Prevention Plan Requirements	G-1
Attachment H – State Water Board Minimum Levels.....	H-1
Attachment I – List of Priority Pollutants	I-1
Attachment J - Summary of Reasonable Potential Analysis and WQBEL Calculations.....	J-1

I. FACILITY INFORMATION

The following Discharger is subject to waste discharge requirements as set forth in this Order:

Table 4. Facility Information

Discharger	Vopak Terminal Long Beach, Incorporated
Name of Facility	Vopak Terminal Long Beach
Facility Address	3601 Dock Street
	San Pedro, CA 90731
	Los Angeles County
Facility Contact, Title, and Phone	Eileen Oblea, 310-549-0961
Mailing Address	Same as Facility Address
Type of Facility	Bulk Liquid Chemical Storage and Transfer Terminal
Facility Design Flow	Discharge Point No. 001 – 288,000 gallons per day (GPD)

II. FINDINGS

The California Regional Water Quality Control Board, Los Angeles Region (hereinafter Regional Water Board), finds:

A. Background. Vopak Terminal Long Beach, Incorporated (hereinafter Discharger) is currently discharging pursuant to Order No. R4-2005-0007 and National Pollutant Discharge Elimination System (NPDES) Permit No. CA0064165. The Discharger submitted a Report of Waste Discharge (ROWD), dated September 14, 2009, and applied for an NPDES permit renewal to discharge up to 288,000 gallons per day [0.288 million gallons per day (MGD)] of treated wastewater from Vopak Terminal Long Beach, hereinafter Facility.

For the purposes of this Order, references to the “discharger” or “permittee” in applicable federal and state laws, regulations, plans, or policy are held to be equivalent to references to the Discharger herein.

B. Facility Description. The Discharger owns and operates a bulk liquid chemical storage facility, receiving bulk liquid chemicals by rail and tanker ships. The Facility has 55 aboveground storage tanks located within 16 separate diked containment areas that store chlorinated solvents, non-halogenated solvents, caustics, organic liquids, amines, oil, and petroleum distillates. Wastewaters include compressor condensate, fire system test water, truck rinse water, and storm water. The fire test water, compressor condensate, truck rinse water, and storm water are collected in a sump and are treated through a series of pre-filters and high pressure granular activated carbon (GAC) beds and discharged through Discharge Point No. 001. The domestic wastewater generated onsite is collected and hauled offsite for disposal. The Discharger monitors wastewater prior to release to pre-determine compliance with effluent limitations. If the Discharger determines that effluent limitations would be met, wastewater is discharged through Discharge Point No. 001 to the Cerritos Channel, a tributary to the Long Beach Inner Harbor. If the Discharger determines effluent concentrations would not meet effluent limitations, the wastewater is either retained and allowed to evaporate or transported offsite to a private waste treatment facility.

Attachment B provides a map of the area around the Facility. Attachment C provides a flow schematic of the Facility.

C. Legal Authorities. This Order is issued pursuant to section 402 of the federal Clean Water Act (CWA) and implementing regulations adopted by the U.S. Environmental Protection Agency (USEPA) and chapter 5.5, division 7 of the California Water Code (commencing with section 13370). It shall serve as a NPDES permit for point source discharges from this facility to surface waters. This Order also serves as Waste Discharge Requirements (WDRs) pursuant to article 4, chapter 4, division 7 of the Water Code (commencing with section 13260).

D. Background and Rationale for Requirements. The Regional Water Board developed the requirements in this Order based on information submitted as part of the application,

through monitoring and reporting programs, and other available information. The Fact Sheet (Attachment F), which contains background information and rationale for Order requirements, is hereby incorporated into this Order and constitutes part of the Findings for this Order. Attachments A through E and G through J are also incorporated into this Order.

E. California Environmental Quality Act (CEQA). Under Water Code section 13389, this action to adopt an NPDES permit is exempt from the provisions of CEQA, Public Resources Code sections 21100-21177.

F. Technology-based Effluent Limitations. Section 301(b) of the CWA and implementing USEPA permit regulations at part 122.44, title 40 of the Code of Federal Regulations¹, require that permits include conditions meeting applicable technology-based requirements at a minimum, and any more stringent effluent limitations necessary to meet applicable water quality standards. The discharge authorized by this Order must meet minimum federal technology-based requirements based on Best Professional Judgment (BPJ) in accordance with part 125.3. A detailed discussion of the technology-based effluent limitations development is included in the Fact Sheet (Attachment F).

G. Water Quality-Based Effluent Limitations. Section 301(b) of the CWA and part 122.44(d) require that permits include limitations more stringent than applicable federal technology-based requirements where necessary to achieve applicable water quality standards.

40 CFR part 122.44(d)(1)(i) mandates that permits include effluent limitations for all pollutants that are or may be discharged at levels that have the reasonable potential to cause or contribute to an exceedance of a water quality standard, including numeric and narrative objectives within a standard. Where reasonable potential has been established for a pollutant, but there is no numeric criterion or objective for the pollutant, water quality-based effluent limitations (WQBELs) must be established using: (1) USEPA criteria guidance under CWA section 304(a), supplemented where necessary by other relevant information; (2) an indicator parameter for the pollutant of concern; or (3) a calculated numeric water quality criterion, such as a proposed state criterion or policy interpreting the state's narrative criterion, supplemented with other relevant information, as provided in part 122.44(d)(1)(vi).

Certain receiving waters in the Los Angeles and Ventura County watersheds do not fully support beneficial uses and therefore have been classified as impaired on the 2006 303(d) list and they have been scheduled for total maximum daily load (TMDL) development. The USEPA approved the State's 2006 303(d) list of impaired water bodies on June 28, 2007. The Facility discharges into Cerritos Channel, tributary to Long Beach Inner Harbor. The 2006 State Water Board's California 303(d) List classifies the Los Angeles/Long Beach Inner Harbor and several water bodies within the Harbor, as impaired. These water bodies include: a portion of Main Channel, Southeast Basin, West Basin, Pier J, and the breakwater. The pollutants/stressors of concern

¹ All further statutory references are to title 40 of the Code of Federal Regulations unless otherwise indicated.

include: beach closure, benthic community effects, copper, dichloro diphenyl trichloroethane (DDT), polychlorinated biphenyls (PCBs), zinc, and sediment toxicity. To date, only a bacteria TMDL has been developed for the Inner Cabrillo Beach and the Main Ship Channel of the Los Angeles Inner Harbor. The discharge is treated wastewater that is comprised of compressor condensate, fire system testing water, truck rinse water, and storm water runoff from a bulk chemical storage and transfer facility and it is not expected to contribute to elevated bacterial densities. Therefore, no effluent limitations for bacteria are included in this Order. However, this Order requires the Discharger to monitor for bacteria.

The effluent limitations in the permit for constituents with reasonable potential are established to protect the beneficial uses of Cerritos Channel and to ensure that the discharge does not degrade its water quality. This permit requires receiving water monitoring for priority pollutants, when there is a discharge from the Facility. This information will be used to complete a reasonable potential analysis (RPA) of all priority pollutants. The Order also includes a Reopener Provision which allows revision of effluent limitations for toxic pollutants based on the results of RPA.

H. Water Quality Control Plans. The Regional Water Board adopted a *Water Quality Control Plan for the Los Angeles Region* (hereinafter Basin Plan) on June 13, 1994, that designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for all waters addressed through the plan. The Basin Plan at page 2-4 states that the beneficial uses of any specifically identified water body generally apply to its tributary streams. The Basin Plan does not specifically identify beneficial uses for Cerritos Channel, but does identify present and potential uses for the Los Angeles/Long Beach Inner Harbor, to which Cerritos Channel is tributary. Beneficial uses applicable to Los Angeles/Long Beach Inner Harbor are as follows:

Table 5. Basin Plan Beneficial Uses

Discharge Point	Receiving Water Name	Beneficial Use(s)
001	Long Beach Inner Harbor	<p><u>Existing:</u> Industrial service supply (IND), navigation (NAV), non-contact recreation (REC-2), commercial and sport fishing (COMM), marine habitat (MAR), preservation of rare and endangered species (RARE).</p> <p><u>Potential:</u> Water contact recreation (REC-1), shellfish harvesting (SHELL).</p>

Requirements of this Order implement the Basin Plan.

The *Water Quality Control Policy for the Enclosed Bays and Estuaries of California* (Enclosed Bays and Estuaries Policy), adopted by the State Water Resources Control Board (State Water Board), as Resolution No. 85-94 on November 16, 1995 states that:

It is the policy of the State Board that the discharge of municipal wastewaters and industrial process waters (exclusive of cooling water discharges) to enclosed bays and estuaries, other than the San Francisco Bay-Delta system, shall be phased out at the earliest practicable date. Exceptions to this provision may be granted by a Regional Water Board only when the Regional Water Board finds that the wastewater in question would consistently be treated and discharged in such a manner that it would enhance the quality of receiving waters above that which would occur in the absence of the discharge.

While the effluent from the Facility discharges into the Cerritos Channel, within the bay, the wastewater is comprised primarily of treated storm water, fire protection test water, truck rinse water, and compressor condensate water not industrial process water or municipal wastewater. Nonetheless, this Order contains provisions necessary to protect all beneficial uses.

The State Water Board adopted the *Water Quality Control Plan for Control of Temperature in the Coastal and Interstate Water and Enclosed Bays and Estuaries of California* (Thermal Plan) on May 18, 1972, and amended this plan on September 18, 1975. This plan contains temperature objectives for inland and coastal surface waters. Requirements of this Order implement the Thermal Plan.

Ammonia Basin Plan Amendment. The 1994 Basin Plan provided water quality objectives for ammonia to protect aquatic life, in Table 3-1 through Table 3-4. However, those ammonia objectives were revised on March 4, 2004, by the Regional Water Board with the adoption of Resolution No. 2004-022, *Amendment to the Water Quality Plan for the Los Angeles Region to Update the Ammonia Objectives for Inland Surface Waters Not Characteristic of Freshwater (including enclosed bays, estuaries and wetlands) with the Beneficial Use Designations for Protection of "Aquatic Life"*. The ammonia Basin Plan amendment was approved by the Office of Administrative Law on September 15, 2004, and by USEPA on May 19, 2005. The amendment revised the Basin Plan by updating the ammonia objectives for inland surface waters not characteristic of freshwater such that they are consistent with the USEPA "Ambient Water Quality Criteria for Ammonia (Saltwater) – 1989." The amendment revised the regulatory provisions of the Basin Plan by adding language to Chapter 3, "Water Quality Objectives."

The amendment contains objectives for a 4-day average concentration of un-ionized ammonia of 0.035 mg/L, and a 1-hour average concentration of un-ionized ammonia of 0.233 mg/L. The objectives are fixed concentrations of un-ionized ammonia, independent of pH, temperature, or salinity. The amendment also contains an implementation procedure to convert un-ionized ammonia objectives to total ammonia effluent limitations.

Data for ammonia from the Facility is not available to determine if effluent limitations would be necessary to protect water quality. Thus, no effluent limitation for ammonia is included in this Order; however, monitoring for ammonia has been established for both effluent and receiving waters. The Regional Water Board reserves the right to reopen the permit if effluent or receiving water data indicate that an effluent limitation for ammonia is appropriate.

- I. National Toxics Rule (NTR) and California Toxics Rule (CTR).** USEPA adopted the NTR on December 22, 1992, and later amended it on May 4, 1995, and November 9, 1999. About forty criteria in the NTR applied in California. On May 18, 2000, USEPA adopted the CTR. The CTR promulgated new toxics criteria for California and, in addition, incorporated the previously adopted NTR criteria that were applicable in the state. The CTR was amended on February 13, 2001. These rules contain water quality criteria for priority pollutants.
- J. State Implementation Policy.** On March 2, 2000, the State Water Board adopted the Policy for Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California (State Implementation Policy or SIP). The SIP became effective on April 28, 2000, with respect to the priority pollutant criteria promulgated for California by the USEPA through the NTR and to the priority pollutant objectives established by the Regional Water Board in the Basin Plan. The SIP became effective on May 18, 2000, with respect to the priority pollutant criteria promulgated by the USEPA through the CTR. The State Water Board adopted amendments to the SIP on February 24, 2005, that became effective on July 13, 2005. The SIP establishes implementation provisions for priority pollutant criteria and objectives and provisions for chronic toxicity control. Requirements of this Order implement the SIP.
- K. Compliance Schedules and Interim Requirements.** Section 2.1 of the SIP provides that, based on a Discharger's request and demonstration that it is infeasible for an existing Discharger to achieve immediate compliance with an effluent limitation derived from a CTR criterion, compliance schedules may be allowed in an NPDES permit. Unless an exception has been granted under section 5.3 of the SIP, a compliance schedule may not exceed 5 years from the date that the permit is issued or reissued, nor may it extend beyond 10 years from the effective date of the SIP (or May 18, 2010) to establish and comply with CTR criterion-based effluent limitations. Where a compliance schedule for a final effluent limitation exceeds 1 year, the Order must include interim numeric limitations for that constituent or parameter. Where allowed by the Water Quality Control Plan Los Angeles Region, compliance schedules and interim effluent limitations or discharge specifications may also be granted to allow time to implement a new or revised water quality objective. This Order includes compliance schedules and interim effluent limitations. A detailed discussion of the basis for the compliance schedule(s) and interim effluent limitation(s) and/or discharge specifications is included in the Fact Sheet.
- L. Alaska Rule.** On March 30, 2000, USEPA revised its regulation that specifies when new and revised state and tribal water quality standards (WQS) become effective for CWA purposes. (40 C.F.R. § 131.21; 65 Fed. Reg. 24641 (April 27, 2000).) Under the

revised regulation (also known as the Alaska rule), new and revised standards submitted to USEPA after May 30, 2000, must be approved by USEPA before being used for CWA purposes. The final rule also provides that standards already in effect and submitted to USEPA by May 30, 2000, may be used for CWA purposes, whether or not approved by USEPA.

M. Stringency of Requirements for Individual Pollutants. This Order contains both technology-based and water quality-based effluent limitations for individual pollutants. The technology-based effluent limitations consist of restrictions on total suspended solids (TSS), oil and grease, 5-day biochemical oxygen demand (BOD₅), turbidity, settleable solids, phenols, total sulfide, vinyl chloride, and total petroleum hydrocarbons. Restrictions on these parameters are discussed in the Fact Sheet, section IV.B.2. This Order's technology-based pollutant restrictions implement the minimum, applicable federal technology-based requirements.

Water quality-based effluent limitations (WQBELs) have been scientifically derived to implement water quality objectives that protect beneficial uses. Both the beneficial uses and the water quality objectives have been approved pursuant to federal law and are the applicable federal water quality standards. To the extent that toxic pollutant WQBELs were derived from the CTR, the CTR is the applicable standard pursuant to section 131.38. The scientific procedures for calculating the individual water quality-based effluent limitations for priority pollutants are based on the CTR-SIP, which was approved by USEPA on May 18, 2000. All beneficial uses and water quality objectives contained in the Basin Plan were approved under state law and submitted to and approved by USEPA prior to May 30, 2000. Any water quality objectives and beneficial uses submitted to USEPA prior to May 30, 2000, but not approved by USEPA before that date, are nonetheless "applicable water quality standards for purposes of the CWA" pursuant to section 131.21(c)(1). Collectively, this Order's restrictions on individual pollutants are no more stringent than required to implement the requirements of the CWA.

N. Antidegradation Policy. 40 CFR part 131.12 requires that the state water quality standards include an antidegradation policy consistent with the federal policy. The State Water Board established California's antidegradation policy in State Water Board Resolution No. 68-16. Resolution No. 68-16 incorporates the federal antidegradation policy where the federal policy applies under federal law. Resolution No. 68-16 requires that existing quality of waters be maintained unless degradation is justified based on specific findings. The Regional Water Board's Basin Plan implements, and incorporates by reference, both the state and federal antidegradation policies.

O. Anti-Backsliding Requirements. Sections 402(o)(2) and 303(d)(4) of the CWA and federal regulations at title 40, Code of Federal Regulations section 122.44(l) prohibit backsliding in NPDES permits. These anti-backsliding provisions require effluent limitations in a reissued permit to be as stringent as those in the existing Order, with some exceptions where limitations may be relaxed. All effluent limitations in this Order are at least as stringent as the effluent limitations in the existing Order.

- P. Endangered Species Act.** This Order does not authorize any act that results in the taking of a threatened or endangered species or any act that is now prohibited, or becomes prohibited in the future, under either the California Endangered Species Act (Fish and Game Code sections 2050 to 2097) or the Federal Endangered Species Act (16 U.S.C.A. sections 1531 to 1544). This Order requires compliance with effluent limits, receiving water limits, and other requirements to protect the beneficial uses of waters of the state. The discharger is responsible for meeting all requirements of the applicable Endangered Species Act.
- Q. Monitoring and Reporting.** 40 CFR part 122.48 requires that all NPDES permits specify requirements for recording and reporting monitoring results. Water Code sections 13267 and 13383 authorizes the Regional Water Board to require technical and monitoring reports. The Monitoring and Reporting Program establishes monitoring and reporting requirements to implement federal and State requirements. This Monitoring and Reporting Program is provided in Attachment E.
- R. Standard and Special Provisions.** Standard Provisions, which apply to all NPDES permits in accordance with part 122.41, and additional conditions applicable to specified categories of permits in accordance with part 122.42, are provided in Attachment D. The discharger must comply with all standard provisions and with those additional conditions that are applicable under part 122.42. The Regional Water Board has also included in this Order special provisions applicable to the Discharger. A rationale for the special provisions contained in this Order is provided in the attached Fact Sheet.
- S. Provisions and Requirements Implementing State Law.** The provisions/requirements in subsection VI.C.3 of this Order are included to implement state law only. These provisions/requirements are not required or authorized under the federal CWA; consequently, violations of these provisions/requirements are not subject to the enforcement remedies that are available for NPDES violations.
- T. Notification of Interested Parties.** The Regional Water Board has notified the Discharger and interested agencies and persons of its intent to prescribe Waste Discharge Requirements for the discharge and has provided them with an opportunity to submit their written comments and recommendations. Details of notification are provided in the Fact Sheet of this Order.
- U. Consideration of Public Comment.** The Regional Water Board, in a public meeting, heard and considered all comments pertaining to the discharge. Details of the Public Hearing are provided in the Fact Sheet of this Order.

THEREFORE, IT IS HEREBY ORDERED, that this Order supercedes Order No. R4-2004-0007 except for enforcement purposes, and, in order to meet the provisions contained in division 7 of the Water Code (commencing with section 13000) and regulations adopted thereunder, and the provisions of the federal Clean Water Act (CWA) and regulations and guidelines adopted thereunder, the Discharger shall comply with the requirements in this Order.

III. DISCHARGE PROHIBITIONS

- A.** Wastes discharged through Discharge Point No. 001 shall be limited to a maximum total of 288,000 gallons per day (GPD) of treated storm water, compressor condensate, fire system testing water, and truck rinse water.
- B.** The discharge of wastes from accidental spills or other sources is prohibited.
- C.** Discharges of water, materials, thermal wastes, elevated temperature wastes, toxic wastes, deleterious substances, or wastes other than those authorized by this Order, to a storm drain system, Cerritos Channel, Long Beach Inner Harbor, or other waters of the State, are prohibited.
- D.** Neither the treatment nor the discharge of pollutants shall create pollution, contamination, or a nuisance as defined by Section 13050 of the Water Code.
- E.** Wastes discharged shall not contain any substances in concentrations toxic to human, animal, plant, or aquatic life.
- F.** The discharge shall not cause a violation of any applicable water quality standards for receiving waters adopted by the Regional Water Board or the State Water Board as required by the Federal CWA and regulations adopted thereunder. If more stringent applicable water quality standards are promulgated or approved pursuant to section 303 of the Federal CWA, and amendments thereto, the Regional Water Board will revise and modify this Order in accordance with such more stringent standards.
- G.** The discharge of any radiological, chemical, or biological warfare agent or high level radiological waste is prohibited.
- H.** Any discharge of wastes at any point(s) other than specifically described in this Order is prohibited, and constitutes a violation of the Order.

IV. EFFLUENT LIMITATIONS AND DISCHARGE SPECIFICATIONS

A. Effluent Limitations – Discharge Point No. 001

1. Final Effluent Limitations – Discharge Point No. 001

- a. The Discharger shall maintain compliance with the following effluent limitations at Discharge Point No. 001, with compliance measured at Monitoring Location EFF-001 as described in the attached MRP (Attachment E):

Table 6. Effluent Limitations – Discharge Point No. 001

Pollutants	Units	Effluent Limitations			
		Average Monthly	Maximum Daily	Instantaneous Minimum	Instantaneous Maximum
pH	Standard Units	--	--	6.5	8.5
Temperature ¹	°F	--	--	--	86
Turbidity	NTU	50	75	--	--
Settleable Solids	ml/L	0.1	0.3	--	--
Total Suspended Solids	mg/L	50	60	--	--
	lbs/day ²	120	144		
Oil and grease	mg/L	10	15	--	--
	lbs/day ²	24	36		
Biochemical oxygen demand (5-day@ 20°C) (BOD ₅)	mg/L	20	30	--	--
	lbs/day ²	48	72	--	--
Phenols	mg/L	--	1.0	--	--
	lbs/day ²	--	2.4	--	--
Sulfide, Total	mg/L	--	1.0	--	--
	lbs/day ²	--	2.4	--	--
Residual Chlorine	mg/L	--	0.1	--	--
	lbs/day ²	--	0.24	--	--
Tetrachloroethylene	µg/L	8.9	17.8	--	--
	lbs/day ²	0.02	0.042	--	--
Vinyl Chloride	µg/L	36	--	--	--
	lbs/day ²	0.09	--	--	--
Copper, Total Recoverable	µg/L	2.9	5.8	--	--
	lbs/day ²	0.007	0.014	--	--
Mercury, Total	µg/L	0.05	0.10	--	--
	lbs/day ²	1.2E-04	2.4E-04	--	--
Nickel, Total Recoverable	µg/L	6.78	13.61	--	--
	lbs/day ²	0.02	0.03	--	--
Thallium, Total Recoverable	µg/L	6.3	13	--	--
	lbs/day ²	0.02	0.03	--	--
Zinc, Total Recoverable	µg/L	47	95	--	--
	lbs/day ²	0.11	0.23	--	--
Cyanide, Total (as CN)	µg/L	0.5	1	--	--
	lbs/day ²	0.001	0.002	--	--

Pollutants	Units	Effluent Limitations			
		Average Monthly	Maximum Daily	Instantaneous Minimum	Instantaneous Maximum
Total petroleum hydrocarbons	µg/L	--	100	--	--
	lbs/day ²	--	0.24	--	--
Bis(2-ethylhexyl)phthalate	µg/L	5.9	11.8	--	--
	lbs/day ²	0.01	0.03	--	--

¹ The discharge of an effluent with a maximum temperature more than 20°F above the natural receiving water temperature is prohibited.

² Mass-based effluent limitations for pollutants are based on a maximum flow rate of 0.288 million gallons per day (MGD).

b. The acute toxicity of the effluent shall be such that:

- i.** The average survival in the undiluted effluent for any three (3) consecutive 96-hour static or continuous flow bioassay test shall be at least 90%, and
- ii.** No single test producing less than 70% survival. Compliance with the toxicity objectives will be determined by the method described in Section V of the MRP (Attachment E).
- iii.** If either of the above requirements section IV.A.1.b.i. or ii. is not met, the Discharger shall conduct six additional tests over a six-week period, if possible. The Discharger shall ensure that they receive results of a failing acute toxicity test within 24 hours of the close of the test and the additional tests shall begin within 3 business days of the receipt of the result. If the additional tests indicate compliance with the acute toxicity limitation, the discharger may resume regular testing. However, if the results of any two of the six accelerated tests are less than 90% survival, then the Discharger shall begin a Toxicity Identification Evaluation (TIE). The TIE shall include all reasonable steps to identify the sources of toxicity. Once the sources are identified, the Discharger shall take all reasonable steps to reduce toxicity to meet the objective.
- iv.** If the initial test and any of the additional six acute toxicity bioassay tests result in less than 70% survival, including the initial test, the Discharger shall immediately begin a TIE.
- v.** The Discharger shall conduct acute toxicity monitoring as specified in Monitoring and Reporting Program (MRP).

2. Interim Effluent Limitations

During the period beginning March 6, 2010, and ending on May 17, 2010, the Discharger shall maintain compliance with the following limitations at Discharge Point 001, with compliance measured at Monitoring Location EFF-001 as described in the attached MRP. These interim effluent limitations shall apply in lieu of the

corresponding final effluent limitations specified for the same parameters during the time period indicated in this provision.

Table 7. Interim Effluent Limitations

Parameter	Units	Interim Maximum Daily Effluent Limitation
Mercury	µg/L	1.18
	lbs/day ¹	0.003

¹ Mass-based effluent limitations for pollutants are based on a maximum flow rate of 0.288 million gallons per day (MGD).

B. Land Discharge Specifications – Not Applicable

C. Reclamation Specifications – Not Applicable

V. RECEIVING WATER LIMITATIONS

A. Surface Water Limitations

Receiving water limitations are based on water quality objectives contained in the Basin Plan and are a required part of this Order. The discharge shall not cause the following in Cerritos Channel Long Beach Inner Harbor.

1. The normal ambient pH to fall below 6.5 nor exceed 8.5 units nor vary from normal ambient pH levels by more than 0.5 units.
2. Surface water temperature to rise greater than 5°F above the natural temperature of the receiving waters at any time or place. At no time the temperature be raised above 80° F as a result of waste discharged.
3. Water Contact Standards

a. State/Regional Water Board Water Contact Standards:

In marine water designated for water contact recreation (REC-1), the waste discharged shall not cause the following bacterial standards to be exceeded in the receiving water:

Geometric Mean Limits

- i. Total coliform density shall not exceed 1,000/100 ml.
- ii. Fecal coliform density shall not exceed 200/100 ml.
- iii. Enterococcus density shall not exceed 35/100 ml.

Single Sample Maximum (SSM) Limits

- iv. Total coliform density shall not exceed 10,000/100 ml.
- v. Fecal coliform density shall not exceed 400/100 ml.

- vi. Enterococcus density shall not exceed 104/100 ml.
- vii. Total coliform density shall not exceed 1,000/100 ml, when the fecal coliform/total coliform ratio exceeds 0.1.

In addition, the total coliform density shall not exceed 1,000/100 ml for more than 20 percent of the samples at any sampling station in any 30-day period.

4. Depress the concentration of dissolved oxygen to fall below 5.0 mg/L anytime, and the median dissolved oxygen concentration for any three consecutive months shall not be less than 80 percent of the dissolved oxygen content at saturation.
5. Dissolved sulfide shall not be greater than 0.1 mg/L.
6. Exceed total ammonia (as N) concentrations specified in the Regional Water Board Resolution No. 2004-022. Resolution No. 2004-022 revised the ammonia water quality objectives for inland surface waters not characteristic of freshwater in the 1994 Basin Plan, to be consistent with USEPA's "*Ambient Water Quality Criteria for Ammonia (Saltwater) – 1989.*" Adopted on March 4, 2004, Resolution No. 2004-022 was approved by State Water Board, Office of Administrative Law (OAL) and USEPA on July 22, 2004, September 14, 2004, and May 19, 2005, respectively and is now in effect.
7. The presence of visible, floating, suspended or deposited macroscopic particulate matter or foam.
8. Oils, greases, waxes, or other materials in concentrations that result in a visible film or coating on the surface of the receiving water or on objects in the water.
9. Suspended or settleable materials, chemical substances or pesticides in amounts that cause nuisance or adversely affect any designated beneficial use.
10. Toxic or other deleterious substances in concentrations or quantities which cause deleterious effects on aquatic biota, wildlife, or waterfowl or render any of these unfit for human consumption either at levels created in the receiving waters or as a result of biological concentration.
11. Accumulation of bottom deposits or aquatic growths.
12. Biostimulatory substances at concentrations that promote aquatic growth to the extent that such growth causes nuisance or adversely affects beneficial uses.
13. The presence of substances that result in increases of BOD₅ that adversely affect beneficial uses.
14. Taste or odor-producing substances in concentrations that alter the natural taste, odor, and/or color of fish, shellfish, or other edible aquatic resources; cause nuisance; or adversely affect beneficial uses.
15. Alteration of turbidity, or apparent color beyond present natural background levels.

16. Damage, discolor, nor cause formation of sludge deposits on flood control structures or facilities nor overload the design capacity.
17. Degrade surface water communities and populations including vertebrate, invertebrate, and plant species.
18. Problems associated with breeding of mosquitoes, gnats, black flies, midges, or other pests.
19. Create nuisance, or adversely affect beneficial uses of the receiving water.
20. Violation of any applicable water quality standards for receiving waters adopted by the Regional Water Board or State Water Board. If more stringent applicable water quality standards are promulgated or approved pursuant to section 303 of the CWA, or amendments thereto, the Regional Water Board will revise or modify this Order in accordance with such standards.

B. Groundwater Limitations – Not Applicable

VI. PROVISIONS

A. Standard Provisions

1. Federal Standard Provisions. The Discharger shall comply with all Standard Provisions included in Attachment D of this Order.
2. Regional Water Board Standard Provisions. The Discharger shall comply with the following provisions:
 - a. This Order may be modified, revoked, reissued, or terminated in accordance with the provisions of parts 122.44, 122.62, 122.63, 122.64, 125.62 and 125.64. Causes for taking such actions include, but are not limited to: failure to comply with any condition of this Order; endangerment to human health or the environment resulting from the permitted activity; or acquisition of newly-obtained information which would have justified the application of different conditions if known at the time of Order adoption. The filing of a request by the Discharger for an Order modification, revocation, and issuance or termination, or a notification of planned changes or anticipated noncompliance does not stay any condition of this Order.
 - b. The Discharger must comply with the lawful requirements of municipalities, counties, drainage districts, and other local agencies regarding discharges of storm water to storm drain systems or other water courses under their jurisdiction; including applicable requirements in municipal storm water management program developed to comply with NPDES permits issued by the Regional Water Board to local agencies.
 - c. Discharge of wastes to any point other than specifically described in this Order and permit is prohibited and constitutes a violation thereof.
 - d. The Discharger shall comply with all applicable effluent limitations, national standards of performance, toxic effluent standards, and all federal regulations established pursuant to sections 301, 302, 303(d), 304, 306, 307, 316, 318, 405, and 423 of the Federal CWA and amendments thereto.
 - e. These requirements do not exempt the operator of the waste disposal facility from compliance with any other laws, regulations, or ordinances which may be applicable; they do not legalize this waste disposal facility, and they leave unaffected any further restraints on the disposal of wastes at this site which may be contained in other statutes or required by other agencies.
 - f. Oil or oily material, chemicals, refuse, or other pollutionable materials shall not be stored or deposited in areas where they may be picked up by rainfall and carried off of the property and/or discharged to surface waters. Any such spill of such materials shall be contained and removed immediately.

- g.** A copy of these waste discharge specifications shall be maintained at the discharge facility so as to be available at all times to operating personnel.
- h.** After notice and opportunity for a hearing, this Order may be terminated or modified for cause, including, but not limited to:

 - i.** Violation of any term or condition contained in this Order;
 - ii.** Obtaining this Order by misrepresentation, or failure to disclose all relevant facts;
 - iii.** A change in any condition that requires either a temporary or permanent reduction or elimination of the authorized discharge.
- i.** If there is any storage of hazardous or toxic materials or hydrocarbons at this facility and if the facility is not manned at all times, a 24-hour emergency response telephone number shall be prominently posted where it can easily be read from the outside.
- j.** The Discharger shall notify the Regional Water Board not later than 120 days in advance of implementation of any plans to alter production capacity of the product line of the manufacturing, producing or processing facility by more than ten percent. Such notification shall include estimates of proposed production rate, the type of process, and projected effects on effluent quality. Notification shall include submittal of a new report of waste discharge appropriate filing fee.
- k.** The Discharger shall file with the Regional Water Board a report of waste discharge at least 120 days before making any material change or proposed change in the character, location or volume of the discharge.
- l.** All existing manufacturing, commercial, mining, and silvicultural dischargers must notify the Regional Water Board as soon as they know or have reason to believe that they have begun or expect to begin to use or manufacture intermediate or final product or byproduct of any toxic pollutant that was not reported on their application.
- m.** In the event of any change in name, ownership, or control of these waste disposal facilities, the discharger shall notify this Regional Water Board of such change and shall notify the succeeding owner or operator of the existence of this Order by letter, copy of which shall be forwarded to the Regional Water Board.
- n.** The Water Code provides that any person who violates a waste discharge requirement or a provision of the Water Code is subject to civil penalties of up to \$5,000 per day, \$10,000 per day, or \$25,000 per day of violation, or when the violation involves the discharge of pollutants, is subject to civil penalties of up to \$10 per gallon per day or \$25 per gallon per day of violation; or some combination thereof, depending on the violation, or upon the combination of violations.

Violation of any of the provisions of the NPDES program or of any of the provisions of this Order may subject the violator to any of the penalties described herein, or any combination thereof, at the discretion of the prosecuting authority; except that only one kind of penalty may be applied for each kind of violation.

- o.** The discharge of any product registered under the Federal Insecticide, Fungicide, and Rodenticide Act to any waste stream which may ultimately be released to waters of the United States, is prohibited unless specifically authorized elsewhere in this permit or another NPDES permit. This requirement is not applicable to products used for lawn and agricultural purposes.
- p.** The discharge of any waste resulting from the combustion of toxic or hazardous wastes to any waste stream that ultimately discharges to waters of the United States is prohibited, unless specifically authorized elsewhere in this permit.
- q.** The Discharger shall notify the Executive Officer in writing no later than 6 months prior to the planned discharge of any chemical, other than the products previously reported to the Executive Officer, which may be toxic to aquatic life. Such notification shall include:

 - i.** Name and general composition of the chemical,
 - ii.** Frequency of use,
 - iii.** Quantities to be used,
 - iv.** Proposed discharge concentrations, and
 - v.** USEPA registration number, if applicable.
- r.** Failure to comply with provisions or requirements of this Order, or violation of other applicable laws or regulations governing discharges from this facility, may subject the Discharger to administrative or civil liabilities, criminal penalties, and/or other enforcement remedies to ensure compliance. Additionally, certain violations may subject the Discharger to civil or criminal enforcement from appropriate local, state, or federal law enforcement entities.
- s.** In the event the Discharger does not comply or will be unable to comply for any reason, with any prohibition, maximum daily effluent limitation, or receiving water limitation of this Order, the Discharger shall notify the Regional Water Board by telephone (213) 576-6600 within 24 hours of having knowledge of such noncompliance, and shall confirm this notification in writing within five days, unless the Regional Water Board waives confirmation. The written notification shall state the nature, time, duration, and cause of noncompliance, and shall describe the measures being taken to remedy the current noncompliance and, prevent recurrence including, where applicable, a schedule of implementation. Other noncompliance requires written notification as above at the time of the normal monitoring report.

- t. Prior to making any change in the point of discharge, place of use, or purpose of use of treated wastewater that results in a decrease of flow in any portion of a watercourse, the Discharger must file a petition with the State Water Board, Division of Water Rights, and receive approval for such a change. (Wat. Code § 1211.)

B. Monitoring and Reporting Program (MRP) Requirements

The Discharger shall comply with the MRP, and future revisions thereto, in Attachment E of this Order.

C. Special Provisions

1. Reopener Provisions

- a. If more stringent applicable water quality standards are promulgated or approved pursuant to Section 303 of the Federal CWA, and amendments thereto, the Regional Water Board will revise and modify this Order in accordance with such more stringent standards.
- b. This Order may be reopened to include effluent limitations for toxic constituents determined to be present in significant amounts in the discharge through a more comprehensive monitoring program included as part of this Order and based on the results of the RPA.
- c. This Order may be reopened and modified, to incorporate in accordance with the provisions set forth in 40 CFR Parts 122 and 124, to include requirements for the implementation of the watershed management approach or to include new MLs.
- d. This Order may be reopened and modified to revise effluent limitations as a result of future Basin Plan Amendments, such as an update of an objective or the adoption of a TMDL for the Long Beach Inner Harbor.
- e. This Order may be reopened upon submission by the Discharger of adequate information, as determined by the Regional Water Board, to provide for dilution credits or a mixing zone, as may be appropriate.
- f. This Order may be reopened for modification, or revocation and reissuance, as a result of the detection of a reportable priority pollutant generated by special conditions included in this Order. These special conditions may be, but are not limited to, fish tissue sampling, whole effluent toxicity, monitoring requirements on internal waste stream(s), and monitoring for surrogate parameters. Additional requirements may be included in this Order as a result of the special condition monitoring data.

2. Special Studies, Technical Reports and Additional Monitoring Requirements

- a. **Initial Investigation Toxicity Reduction Evaluation (TRE) Workplan.** The Discharger shall submit to the Regional Water Board an Initial Investigation

Toxicity Reduction Evaluation (TRE) workplan (1-2 pages) **within 90 days** of the effective date of this permit. This plan shall describe the steps the permittee intends to follow in the event that toxicity is detected, and should include at a minimum:

- i. A description of the investigation and evaluation techniques that will be used to identify potential causes/sources of toxicity, effluent variability, and treatment system efficiency;
- ii. A description of the facility's method of maximizing in-house treatment efficiency and good housekeeping practices, and a list of all chemicals used in operation of the facility;
- iii. If a toxicity identification evaluation (TIE) is necessary, an indication of the person who would conduct the TIEs (i.e., an in-house expert or an outside contractor) (Section V of the MRP, Attachment E) provides references for the guidance manuals that should be used for performing TIEs).

3. Best Management Practices and Pollution Prevention

The Discharger shall submit, within 90 days of the effective date of this Order:

- a. An updated Storm Water Pollution Prevention Plan (SWPPP) that describes site-specific management practices for minimizing contamination of storm water runoff and for preventing contaminated storm water runoff from being discharged directly to waters of the State. The BMPs shall address the following specific areas of concern: petroleum storage tanks, equipment washing, vehicle traffic, and chemical storage. The SWPPP shall be developed in accordance with the requirements in Attachment G.
- b. An updated Best Management Practice Plan (BMPP) that entails site-specific plans and procedures implemented and/or to be implemented to prevent hazardous waste/material from being discharged to waters of the State. The updated BMPP shall be consistent with the general guidance contained in the USEPA Guidance Manual for Developing Best Management Practices (EPA 833-B-93-004). In particular, a risk assessment of each area identified by the Discharger shall be performed to determine the potential for hazardous or toxic waste/material discharge to surface waters.
- c. A Spill Contingency Plan (SCP) (or substituted with an updated version of the Discharger's existing Spill Prevention Control and Countermeasure (SPCC) Plan.

The plans shall cover all areas of the Facility and shall include an updated drainage map for the Facility. The Discharger shall identify on a map of appropriate scale the areas that contribute runoff to the permitted discharge points (e.g., chemical storage); describe the activities in each area and the potential for contamination of storm water runoff and the discharge of hazardous waste/material.

4. Pollution Pollutant Minimization Program

The Discharger shall develop and conduct a Pollutant Minimization Program (PMP) to maintain effluent concentrations of mercury as further described below when there is evidence (e.g., sample results reported as DNQ when the effluent limitation is less than the MDL, sample results from analytical methods more sensitive than those methods required by this Order, presence of whole effluent toxicity, health advisories for fish consumption, results of benthic or aquatic organism tissue sampling) that a priority pollutant is present in the effluent above an effluent limitation and either:

- i. A sample result is reported as DNQ and the effluent limitation is less than the RL;
or
- ii. A sample result is reported as ND and the effluent limitation is less than the MDL, using definitions described in Attachment A and reporting protocols described in MRP section X.B.4.

The PMP shall include, but not be limited to, the following actions and submittals acceptable to the Regional Water Board:

- i. An annual review and semi-annual monitoring of potential sources of the reportable priority pollutant(s), which may include fish tissue monitoring and other bio-uptake sampling;
- ii. Submittal of a control strategy designed to proceed toward the goal of maintaining concentrations of the reportable priority pollutant(s) in the effluent at or below the effluent limitation;
- iii. Implementation of appropriate cost-effective control measures for the reportable priority pollutant(s), consistent with the control strategy; and
- iv. An annual status report that shall be sent to the Regional Water Board including that shall be sent to the Regional Water Board at the same time the annual summary report is submitted in accordance with section X.C of the MRP (Attachment E) and include:
 - (a) All PMP monitoring results for the previous year;
 - (b) A list of potential sources of the reportable priority pollutant(s)—mercury;
 - (c) A summary of all actions undertaken pursuant to the control strategy; and
 - (d) A description of actions to be taken in the following year.

5. Construction, Operation and Maintenance Specifications – Not Applicable

6. Special Provisions for Municipal Facilities (POTWs Only) – Not Applicable

7. Other Special Provisions – Not Applicable

8. Compliance Schedules

- a.** The interim limitations stipulated in section IV.A.2 of this Order for mercury shall be in effect for a period not to extend beyond May 17, 2010. Thereafter, the Discharger shall comply with the final limitations specified for mercury section IV.A.1 of this Order.

The Discharger shall submit quarterly reports to describe the progress of studies and or actions undertaken to reduce mercury in the effluent, and to achieve compliance with the limitations in this Order by the deadline specified above. The Regional Water Board shall receive the first progress report at the same time the first quarterly report is due (May 1, 2010), as required in section X.B. of the MRP (Attachment E).

VII. COMPLIANCE DETERMINATION

Compliance with the effluent limitations contained in section IV of this Order will be determined as specified below:

A. Single Constituent Effluent Limitation

If the concentration of the pollutant in the monitoring sample is greater than the effluent limitation and greater than or equal to the reported Minimum Level (see Reporting Requirement I.G. of the MRP), then the Discharger is out of compliance.

B. Mass-based Effluent Limitations

In calculating mass emission rates from the monthly average concentrations, use one half of the method detection limit for “Not Detected” (ND) and the estimated concentration for “Detected, but Not Quantified” (DNQ) for the calculation of the monthly average concentration. To be consistent with Limitations and Discharge Requirements, Section VII.B, if all pollutants belonging to the same group are reported as ND or DNQ, the sum of the individual pollutant concentrations should be considered as zero for the calculation of the monthly average concentration.

C. Multiple Sample Data

When determining compliance with an MDEL for priority pollutants and more than one sample result is available, the Discharger shall compute the arithmetic mean unless the data set contains one or more reported determinations of “Detected, but Not Quantified” (DNQ) or “Not Detected” (ND). In those cases, the Discharger shall compute the median in place of the arithmetic mean in accordance with the following procedure:

1. The data set shall be ranked from low to high, ranking the reported ND determinations lowest, DNQ determinations next, followed by quantified values (if any). The order of the individual ND or DNQ determinations is unimportant.
2. The median value of the data set shall be determined. If the data set has an odd number of data points, then the median is the middle value. If the data set has an even number of data points, then the median is the average of the two values around the middle unless one or both of the points are ND or DNQ, in which case the median value shall be the lower of the two data points where DNQ is lower than a value and ND is lower than DNQ.

D. Average Monthly Effluent Limitation (AMEL)

If the average (or when applicable, the median determined by section VII.B above for the multiple sample data) of daily discharges over a calendar month exceeds the AMEL for a given parameter, this will represent a single violation, though the Discharger will be considered out of compliance for each day of that month for that parameter (e.g., resulting in 31 days of non-compliance in a 31-day month). If only a single sample is taken during the calendar month and the analytical result for that sample exceeds the AMEL, the Discharger will be considered out of compliance for that calendar month.

The Discharger will only be considered out of compliance for days when the discharge occurs. For any one calendar month during which no sample (daily discharge) is taken, no compliance determination can be made for that calendar month.

E. Maximum Daily Effluent Limitations (MDEL)

If a daily discharge exceeds the MDEL for a given parameter, an alleged violation will be flagged and the discharger will be considered out of compliance for that parameter for that 1 day only within the reporting period. For any 1 day during which no sample is taken, no compliance determination can be made for that day.

F. Instantaneous Minimum Effluent Limitation

If the analytical result of a single grab sample is lower than the instantaneous minimum effluent limitation for a parameter, a violation will be flagged and the discharger will be considered out of compliance for that parameter for that single sample. Non-compliance for each sample will be considered separately (e.g., the results of two grab samples taken within a calendar day that both are lower than the instantaneous minimum effluent limitation would result in two instances of non-compliance with the instantaneous minimum effluent limitation).

G. Instantaneous Maximum Effluent Limitation

If the analytical result of a single grab sample is higher than the instantaneous maximum effluent limitation for a parameter, a violation will be flagged and the discharger will be considered out of compliance for that parameter for that single sample. Non-compliance for each sample will be considered separately (e.g., the results of two grab samples taken within a calendar day that both exceed the instantaneous maximum effluent limitation would result in two instances of non-compliance with the instantaneous maximum effluent limitation).

ATTACHMENT A – DEFINITIONS

Arithmetic Mean (μ)

Also called the average, is the sum of measured values divided by the number of samples. For ambient water concentrations, the arithmetic mean is calculated as follows:

Arithmetic mean = $\mu = \Sigma x / n$ where: Σx is the sum of the measured ambient water concentrations, and n is the number of samples.

Average Monthly Effluent Limitation (AMEL)

The highest allowable average of daily discharges over a calendar month, calculated as the sum of all daily discharges measured during a calendar month divided by the number of daily discharges measured during that month.

Average Weekly Effluent Limitation (AWEL)

The highest allowable average of daily discharges over a calendar week (Sunday through Saturday), calculated as the sum of all daily discharges measured during a calendar week divided by the number of daily discharges measured during that week.

Bioaccumulative

Those substances taken up by an organism from its surrounding medium through gill membranes, epithelial tissue, or from food and subsequently concentrated and retained in the body of the organism.

Carcinogenic

Pollutants are substances that are known to cause cancer in living organisms.

Coefficient of Variation (CV)

CV is a measure of the data variability and is calculated as the estimated standard deviation divided by the arithmetic mean of the observed values.

Daily Discharge

Daily Discharge is defined as either: (1) the total mass of the constituent discharged over the calendar day (12:00 am through 11:59 pm) or any 24-hour period that reasonably represents a calendar day for purposes of sampling (as specified in the permit), for a constituent with limitations expressed in units of mass or; (2) the unweighted arithmetic mean measurement of the constituent over the day for a constituent with limitations expressed in other units of measurement (e.g., concentration).

The daily discharge may be determined by the analytical results of a composite sample taken over the course of one day (a calendar day or other 24-hour period defined as a day) or by the arithmetic mean of analytical results from one or more grab samples taken over the course of the day.

For composite sampling, if 1 day is defined as a 24-hour period other than a calendar day, the analytical result for the 24-hour period will be considered as the result for the calendar day in which the 24-hour period ends.

Detected, but Not Quantified (DNQ)

DNQ are those sample results less than the RL, but greater than or equal to the laboratory's MDL.

Dilution Credit

Dilution Credit is the amount of dilution granted to a discharge in the calculation of a water quality-based effluent limitation, based on the allowance of a specified mixing zone. It is calculated from the dilution ratio or determined through conducting a mixing zone study or modeling of the discharge and receiving water.

Effluent Concentration Allowance (ECA)

ECA is a value derived from the water quality criterion/objective, dilution credit, and ambient background concentration that is used, in conjunction with the coefficient of variation for the effluent monitoring data, to calculate a long-term average (LTA) discharge concentration. The ECA has the same meaning as waste load allocation (WLA) as used in USEPA guidance (Technical Support Document For Water Quality-based Toxics Control, March 1991, second printing, EPA/505/2-90-001).

Enclosed Bays

Enclosed Bays means indentations along the coast that enclose an area of oceanic water within distinct headlands or harbor works. Enclosed bays include all bays where the narrowest distance between the headlands or outermost harbor works is less than 75 percent of the greatest dimension of the enclosed portion of the bay. Enclosed bays include, but are not limited to, Humboldt Bay, Bodega Harbor, Tomales Bay, Drake's Estero, San Francisco Bay, Morro Bay, Los Angeles/Long Beach Harbor, Upper and Lower Newport Bay, Mission Bay, and San Diego Bay. Enclosed bays do not include inland surface waters or ocean waters.

Estimated Chemical Concentration

The estimated chemical concentration that results from the confirmed detection of the substance by the analytical method below the ML value.

Estuaries

Estuaries means waters, including coastal lagoons, located at the mouths of streams that serve as areas of mixing for fresh and ocean waters. Coastal lagoons and mouths of streams that are temporarily separated from the ocean by sandbars shall be considered estuaries. Estuarine waters shall be considered to extend from a bay or the open ocean to a point upstream where there is no significant mixing of fresh water and seawater. Estuarine waters included, but are not limited to, the Sacramento-San Joaquin Delta, as defined in Water Code section 12220, Suisun Bay, Carquinez Strait downstream to the Carquinez Bridge, and appropriate areas of the Smith, Mad, Eel, Noyo, Russian, Klamath, San Diego, and Otay rivers. Estuaries do not include inland surface waters or ocean waters.

Inland Surface Waters

All surface waters of the State that do not include the ocean, enclosed bays, or estuaries.

Instantaneous Maximum Effluent Limitation

The highest allowable value for any single grab sample or aliquot (i.e., each grab sample or aliquot is independently compared to the instantaneous maximum limitation).

Instantaneous Minimum Effluent Limitation

The lowest allowable value for any single grab sample or aliquot (i.e., each grab sample or aliquot is independently compared to the instantaneous minimum limitation).

Maximum Daily Effluent Limitation (MDEL)

The highest allowable daily discharge of a pollutant, over a calendar day (or 24-hour period). For pollutants with limitations expressed in units of mass, the daily discharge is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the daily discharge is calculated as the arithmetic mean measurement of the pollutant over the day.

Median

The middle measurement in a set of data. The median of a set of data is found by first arranging the measurements in order of magnitude (either increasing or decreasing order). If the number of measurements (n) is odd, then the median = $X_{(n+1)/2}$. If n is even, then the median = $(X_{n/2} + X_{(n/2)+1})/2$ (i.e., the midpoint between the $n/2$ and $n/2+1$).

Method Detection Limit (MDL)

MDL is the minimum concentration of a substance that can be measured and reported with 99 percent confidence that the analyte concentration is greater than zero, as defined in title 40 of the Code of Federal Regulations, Part 136, Attachment B, revised as of July 3, 1999.

Minimum Level (ML)

ML is the concentration at which the entire analytical system must give a recognizable signal and acceptable calibration point. The ML is the concentration in a sample that is equivalent to the concentration of the lowest calibration standard analyzed by a specific analytical procedure, assuming that all the method specified sample weights, volumes, and processing steps have been followed.

Mixing Zone

Mixing Zone is a limited volume of receiving water that is allocated for mixing with a wastewater discharge where water quality criteria can be exceeded without causing adverse effects to the overall water body.

Not Detected (ND)

Sample results which are less than the laboratory's MDL.

Ocean Waters

The territorial marine waters of the State as defined by California law to the extent these waters are outside of enclosed bays, estuaries, and coastal lagoons. Discharges to ocean waters are regulated in accordance with the State Water Board's California Ocean Plan.

Persistent Pollutants

Persistent pollutants are substances for which degradation or decomposition in the environment is nonexistent or very slow.

Pollutant Minimization Program (PMP)

PMP means waste minimization and pollution prevention actions that include, but are not limited to, product substitution, waste stream recycling, alternative waste management methods, and education of the public and businesses. The goal of the PMP shall be to reduce all potential sources of a priority pollutant(s) through pollutant minimization (control) strategies, including pollution prevention measures as appropriate, to maintain the effluent concentration at or below the water quality-based effluent limitation. Pollution prevention measures may be particularly appropriate for persistent bioaccumulative priority pollutants where there is evidence that beneficial uses are being impacted. The Regional Water Board may consider cost effectiveness when establishing the requirements of a PMP. The completion and implementation of a Pollution Prevention Plan, if required pursuant to Water Code section 13263.3(d), shall be considered to fulfill the PMP requirements.

Pollution Prevention

Pollution Prevention means any action that causes a net reduction in the use or generation of a hazardous substance or other pollutant that is discharged into water and includes, but is not limited to, input change, operational improvement, production process change, and product reformulation (as defined in Water Code section 13263.3). Pollution prevention does not include actions that merely shift a pollutant in wastewater from one environmental medium to another environmental medium, unless clear environmental benefits of such an approach are identified to the satisfaction of the State or Regional Water Board.

Reporting Level (RL)

RL is the ML (and its associated analytical method) chosen by the Discharger for reporting and compliance determination from the MLs included in this Order. The MLs included in this Order correspond to approved analytical methods for reporting a sample result that are selected by the Regional Water Board either from Appendix 4 of the SIP in accordance with section 2.4.2 of the SIP or established in accordance with section 2.4.3 of the SIP. The ML is based on the proper application of method-based analytical procedures for sample preparation and the absence of any matrix interferences. Other factors may be applied to the ML depending on the specific sample preparation steps employed. For example, the treatment typically applied in cases where there are matrix-effects is to dilute the sample or sample aliquot by a factor of ten. In such cases, this additional factor must be applied to the ML in the computation of the RL.

Satellite Collection System

The portion, if any, of a sanitary sewer system owned or operated by a different public agency than the agency that owns and operates the wastewater treatment facility that a sanitary sewer system is tributary to.

Source of Drinking Water

Any water designated as municipal or domestic supply (MUN) in a Regional Water Board Basin Plan.

Standard Deviation (σ)

Standard Deviation is a measure of variability that is calculated as follows:

$$\sigma = (\sum[(x - \mu)^2]/(n - 1))^{0.5}$$

where:

x is the observed value;

μ is the arithmetic mean of the observed values; and

n is the number of samples.

Toxicity Reduction Evaluation (TRE)


TRE is a study conducted in a step-wise process designed to identify the causative agents of effluent or ambient toxicity, isolate the sources of toxicity, evaluate the effectiveness of toxicity control options, and then confirm the reduction in toxicity. The first steps of the TRE consist of the collection of data relevant to the toxicity, including additional toxicity testing, and an evaluation of facility operations and maintenance practices, and best management practices. A Toxicity Identification Evaluation (TIE) may be required as part of the TRE, if appropriate. (A TIE is a set of procedures to identify the specific chemical(s) responsible for toxicity. These procedures are performed in three phases (characterization, identification, and confirmation) using aquatic organism toxicity tests.)


ACRONYMS AND ABBREVIATIONS

AMEL	Average Monthly Effluent Limitation
B	Background Concentration
BAT	Best Available Technology Economically Achievable
Basin Plan	<i>Water Quality Control Plan for the Coastal Watersheds of Los Angeles and Ventura Counties</i>
BCT	Best Conventional Pollutant Control Technology
BMP	Best Management Practices
BMPPP	Best Management Practices Plan
BPJ	Best Professional Judgment
BOD	Biochemical Oxygen Demand 5-day @ 20 °C
BPT	Best Practicable Treatment Control Technology
C	Water Quality Objective
CCR	California Code of Regulations
CEQA	California Environmental Quality Act
CFR	Code of Federal Regulations
CTR	California Toxics Rule
CV	Coefficient of Variation
CWA	Clean Water Act
CWC	California Water Code
Discharger	Vopak Terminal Long Beach, Incorporated
DMR	Discharge Monitoring Report
DNQ	Detected But Not Quantified
ELAP	California Department of Health Services Environmental Laboratory Accreditation Program
ELG	Effluent Limitations, Guidelines and Standards
Facility	Vopak Terminal Long Beach
GPD	gallons per day
IC	Inhibition Coefficient
IC ₁₅	Concentration at which the organism is 15% inhibited
IC ₂₅	Concentration at which the organism is 25% inhibited
IC ₄₀	Concentration at which the organism is 40% inhibited
IC ₅₀	Concentration at which the organism is 50% inhibited
LA	Load Allocations
LOEC	Lowest Observed Effect Concentration
µg/L	micrograms per Liter
mg/L	milligrams per Liter
MDEL	Maximum Daily Effluent Limitation
MEC	Maximum Effluent Concentration
MGD	Million Gallons Per Day
ML	Minimum Level
MRP	Monitoring and Reporting Program
ND	Not Detected
NOEC	No Observable Effect Concentration
NPDES	National Pollutant Discharge Elimination System
NSPS	New Source Performance Standards

NTR	National Toxics Rule
OAL	Office of Administrative Law
PMEL	Proposed Maximum Daily Effluent Limitation
PMP	Pollutant Minimization Plan
POTW	Publicly Owned Treatment Works
QA	Quality Assurance
QA/QC	Quality Assurance/Quality Control
Ocean Plan	<i>Water Quality Control Plan for Ocean Waters of California</i>
Regional Water Board	California Regional Water Quality Control Board, Los Angeles Region
RPA	Reasonable Potential Analysis
SPCC	Spill Prevention Control and Countermeasure Plan
SIP	State Implementation Policy (<i>Policy for Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California</i>)
SMR	Self Monitoring Reports
State Water Board	California State Water Resources Control Board
SWPPP	Storm Water Pollution Prevention Plan
TAC	Test Acceptability Criteria
Thermal Plan	<i>Water Quality Control Plan for Control of Temperature in the Coastal and Interstate Water and Enclosed Bays and Estuaries of California</i>
TIE	Toxicity Identification Evaluation
TMDL	Total Maximum Daily Load
TOC	Total Organic Carbon
TRE	Toxicity Reduction Evaluation
TSD	Technical Support Document
TSS	Total Suspended Solid
TU _c	Chronic Toxicity Unit
USEPA	United States Environmental Protection Agency
WDR	Waste Discharge Requirements
WET	Whole Effluent Toxicity
WLA	Waste Load Allocations
WQBELs	Water Quality-Based Effluent Limitations
WQS	Water Quality Standards
%	Percent

ATTACHMENT B – MAP

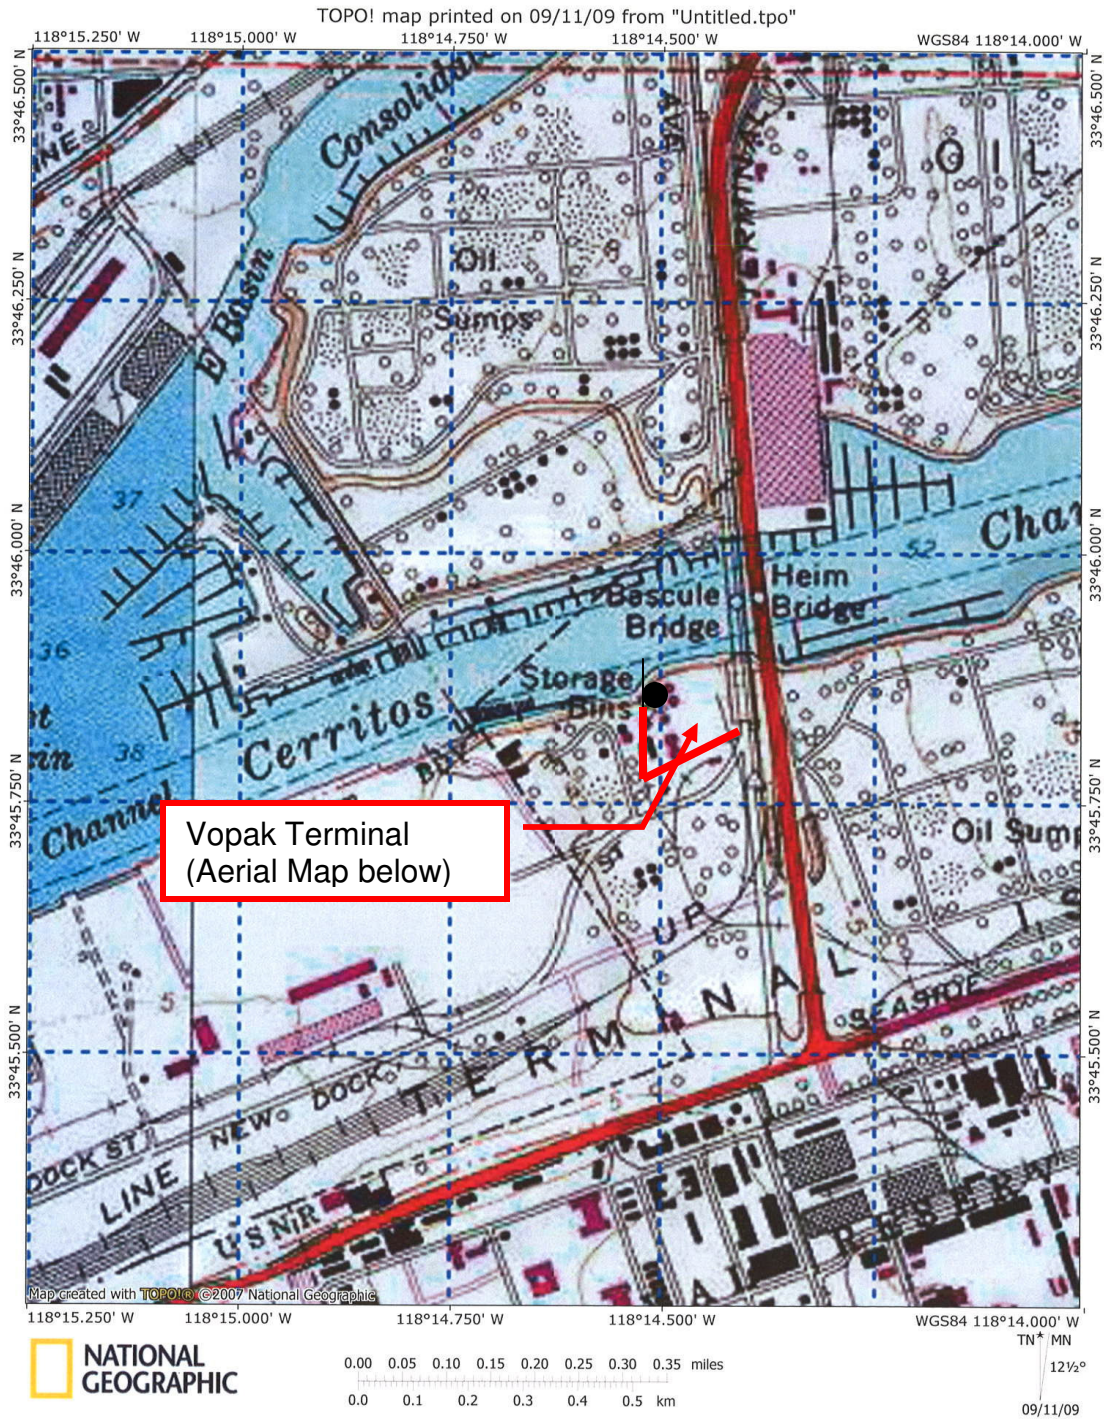

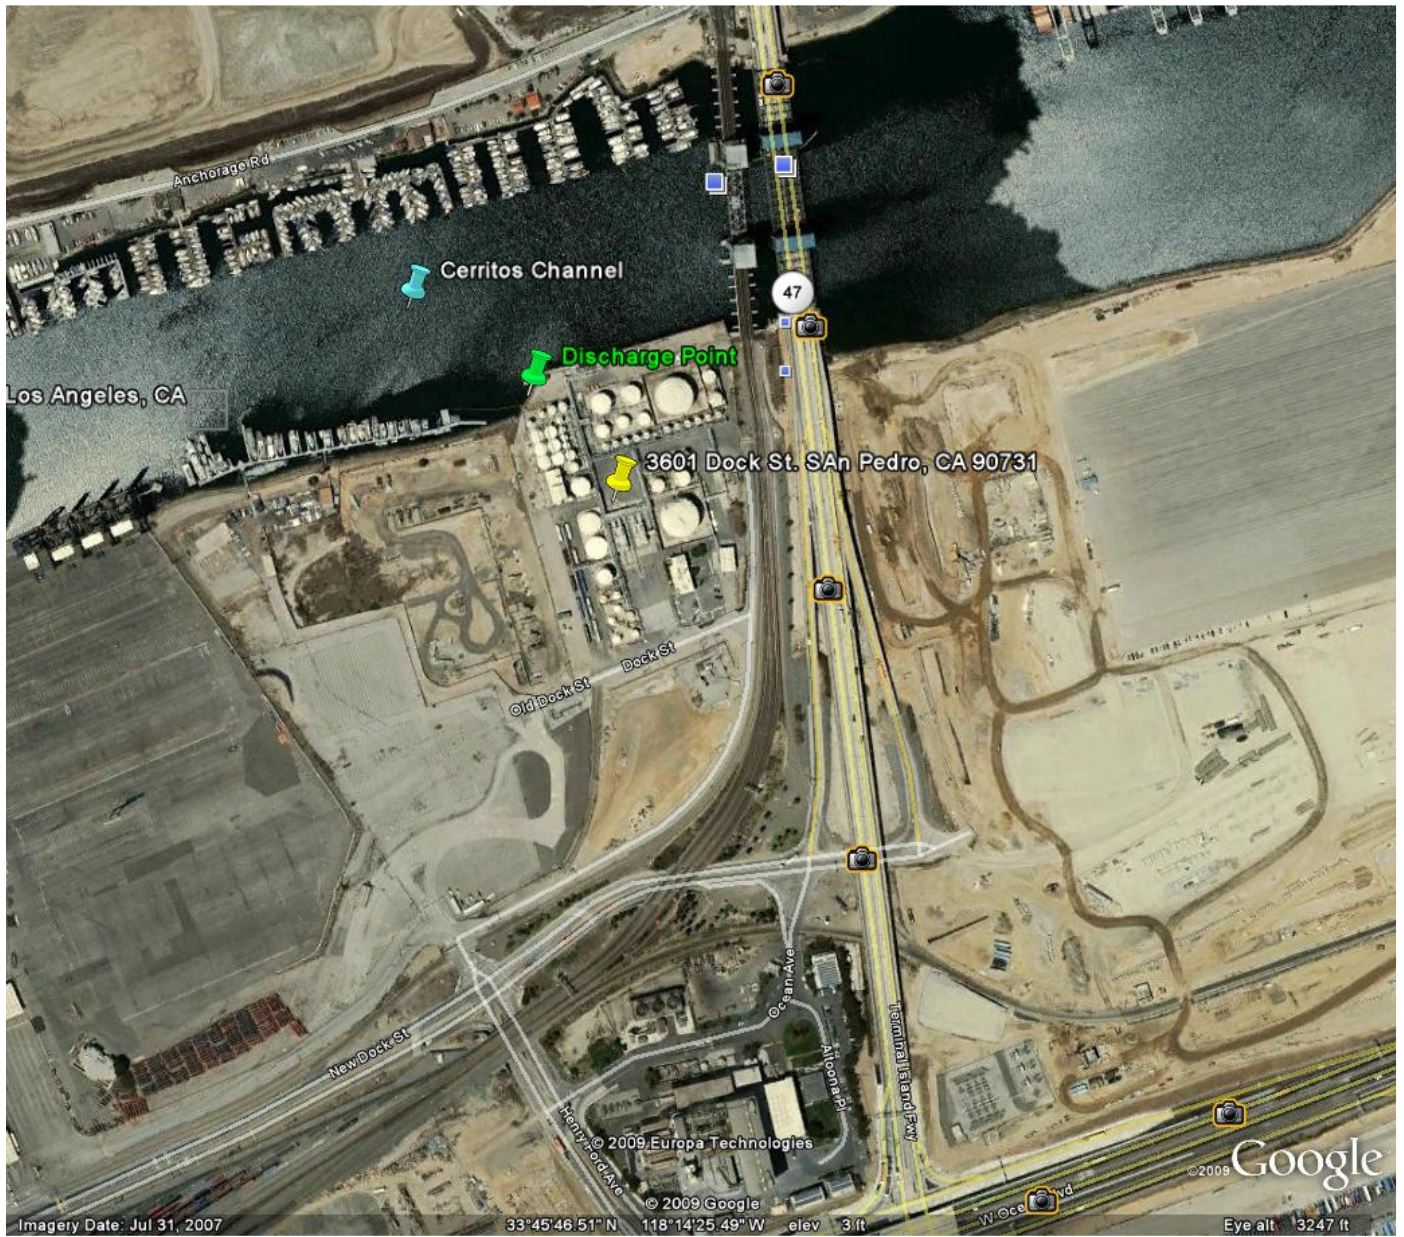

ATTACHMENT C – FLOW SCHEMATIC

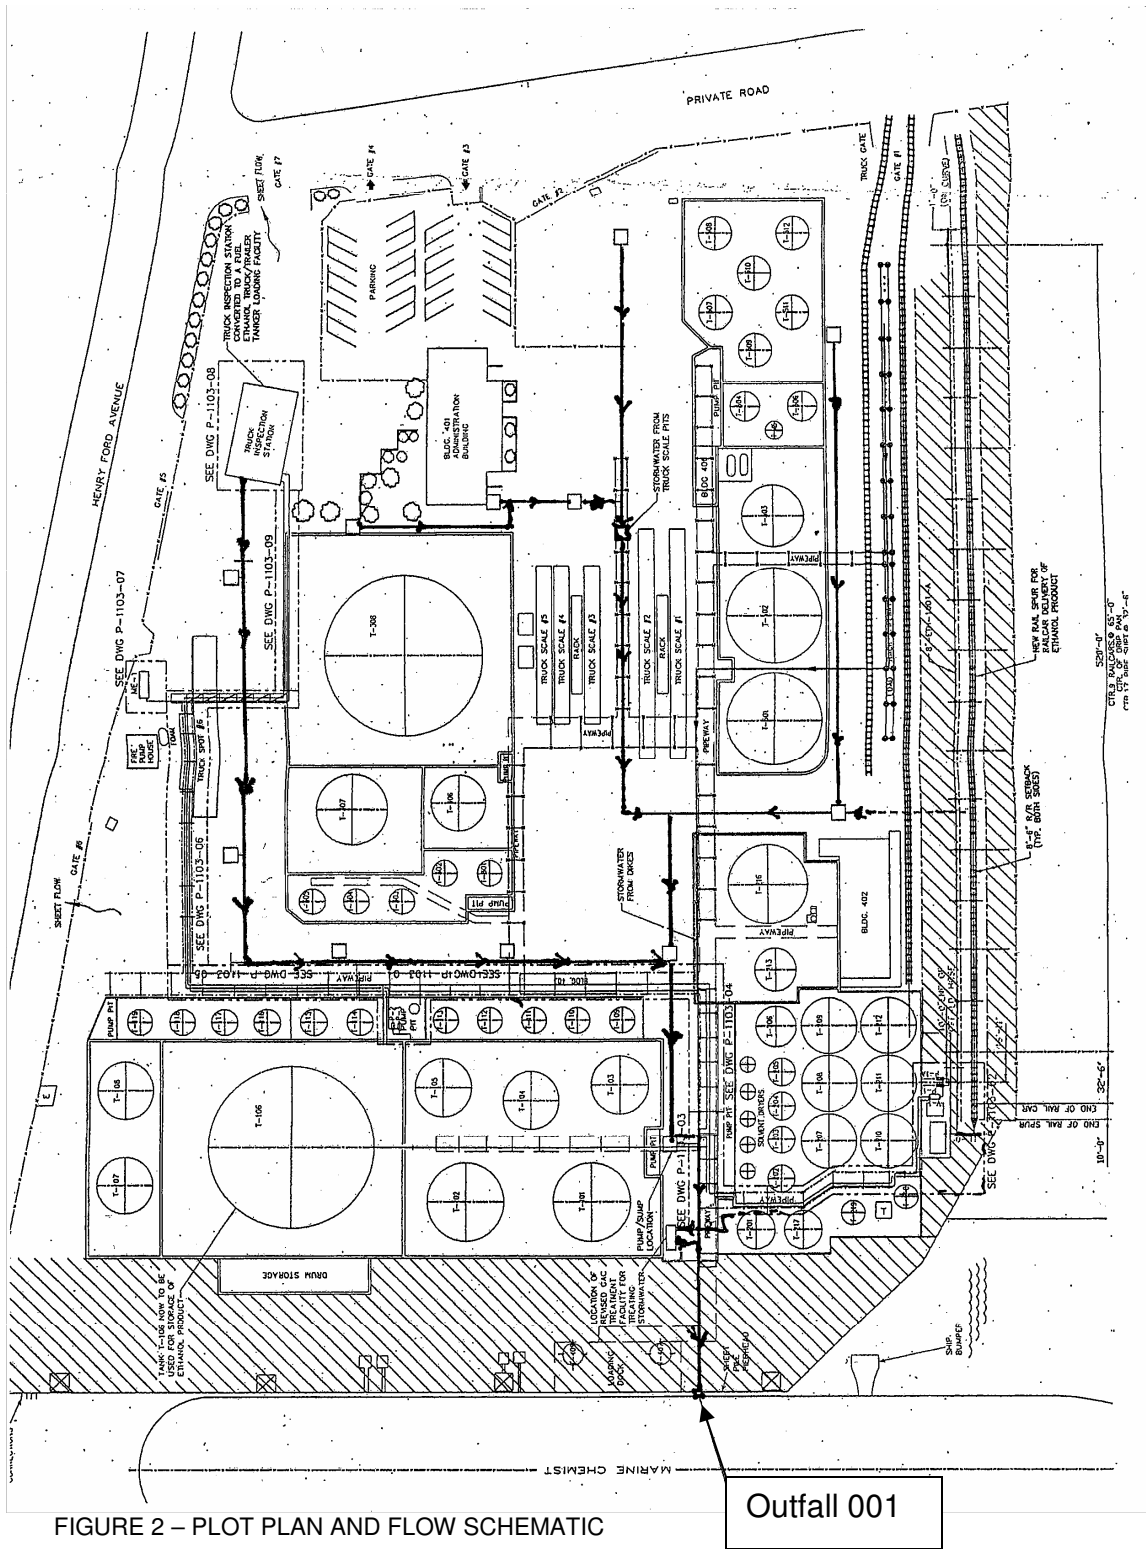


FIGURE 2 – PLOT PLAN AND FLOW SCHEMATIC

Outfall 001

ATTACHMENT D – STANDARD PROVISIONS

I. STANDARD PROVISIONS – PERMIT COMPLIANCE

A. Duty to Comply

1. The Discharger must comply with all of the conditions of this Order. Any noncompliance constitutes a violation of the Clean Water Act (CWA) and the California Water Code and is grounds for enforcement action, for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application [part 122.41(a)].
2. The Discharger shall comply with effluent standards or prohibitions established under Section 307(a) of the CWA for toxic pollutants and with standards for sewage sludge use or disposal established under Section 405(d) of the CWA within the time provided in the regulations that establish these standards or prohibitions, even if this Order has not yet been modified to incorporate the requirement [part 122.41(a)(1)].

B. Need to Halt or Reduce Activity Not a Defense

It shall not be a defense for a Discharger in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this Order [part 122.41(c)].

C. Duty to Mitigate

The Discharger shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this Order that has a reasonable likelihood of adversely affecting human health or the environment [part 122.41(d)].

D. Proper Operation and Maintenance

The Discharger shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Discharger to achieve compliance with the conditions of this Order. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of backup or auxiliary facilities or similar systems that are installed by a Discharger only when necessary to achieve compliance with the conditions of this Order [part 122.41(e)].

E. Property Rights

1. This Order does not convey any property rights of any sort or any exclusive privileges [part 122.41(g)].
2. The issuance of this Order does not authorize any injury to persons or property or invasion of other private rights, or any infringement of state or local law or regulations [part 122.5(c)].

F. Inspection and Entry

The Discharger shall allow the Regional Water Board, State Water Board, United States Environmental Protection Agency (USEPA), and/or their authorized representatives (including an authorized contractor acting as their representative), upon the presentation of credentials and other documents, as may be required by law, to [part 122.41(i)] [Water Code section 13383]:

1. Enter upon the Discharger's premises where a regulated facility or activity is located or conducted, or where records are kept under the conditions of this Order [part 122.41(i)(1)];
2. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this Order [part 122.41(i)(2)];
3. Inspect and photograph, at reasonable times, any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Order [part 122.41(i)(3)]; and
4. Sample or monitor, at reasonable times, for the purposes of assuring Order compliance or as otherwise authorized by the CWA or the Water Code, any substances or parameters at any location [part 122.41(i)(4)].

G. Bypass

1. Definitions

- i. "Bypass" means the intentional diversion of waste streams from any portion of a treatment facility [part 122.41(m)(1)(i)].
 - ii. "Severe property damage" means substantial physical damage to property, damage to the treatment facilities, which causes them to become inoperable, or substantial and permanent loss of natural resources that can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production [part 122.41(m)(1)(ii)].
2. Bypass not exceeding limitations. The Discharger may allow any bypass to occur which does not cause exceedances of effluent limitations, but only if it is for essential maintenance to assure efficient operation. These bypasses are not subject to the provisions listed in Standard Provisions – Permit Compliance I.G.3, I.G.4, and I.G.5 below [part 122.41(m)(2)].
 3. Prohibition of bypass. Bypass is prohibited, and the Regional Water Board may take enforcement action against a Discharger for bypass, unless [part 122.41(m)(4)(i)]:

- a. Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage [part 122.41(m)(4)(i)(A)];
 - b. There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass that occurred during normal periods of equipment downtime or preventive maintenance [part 122.41(m)(4)(i)(B)]; and
 - c. The Discharger submitted notice to the Regional Water Board as required under Standard Provisions – Permit Compliance I.G.5 below [part 122.41(m)(4)(i)(C)].
4. The Regional Water Board may approve an anticipated bypass, after considering its adverse effects, if the Regional Water Board determines that it will meet the three conditions listed in Standard Provisions – Permit Compliance I.G.3 above [part 22.41(m)(4)(ii)].
5. Notice
- a. Anticipated bypass. If the Discharger knows in advance of the need for a bypass, it shall submit a notice, if possible at least 10 days before the date of the bypass [part 122.41(m)(3)(i)].
 - b. Unanticipated bypass. The Discharger shall submit notice of an unanticipated bypass as required in Standard Provisions - Reporting V.E below (24-hour notice) [part 122.41(m)(3)(ii)].

H. Upset

Upset means an exceptional incident in which there is unintentional and temporary noncompliance with technology based permit effluent limitations because of factors beyond the reasonable control of the Discharger. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation [part 122.41(n)(1)].

1. Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology based permit effluent limitations if the requirements of Standard Provisions – Permit Compliance I.H.2 below are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review [part 122.41(n)(2)].
2. Conditions necessary for a demonstration of upset. A Discharger who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs or other relevant evidence that [part 122.41(n)(3)]:

- a. An upset occurred and that the Discharger can identify the cause(s) of the upset [part 122.41(n)(3)(i)];
 - b. The permitted facility was, at the time, being properly operated [part 122.41(n)(3)(ii)];
 - c. The Discharger submitted notice of the upset as required in Standard Provisions – Reporting V.E.2.b below (24-hour notice) [part 122.41(n)(3)(iii)]; and
 - d. The Discharger complied with any remedial measures required under Standard Provisions – Permit Compliance I.C above [part 122.41(n)(3)(iv)].
3. Burden of proof. In any enforcement proceeding, the Discharger seeking to establish the occurrence of an upset has the burden of proof [part 122.41(n)(4)].

II. STANDARD PROVISIONS – PERMIT ACTION

A. General

This Order may be modified, revoked and reissued, or terminated for cause. The filing of a request by the Discharger for modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any Order condition [part 122.41(f)].

B. Duty to Reapply

If the Discharger wishes to continue an activity regulated by this Order after the expiration date of this Order, the Discharger must apply for and obtain a new permit [part 122.41(b)].

C. Transfers

This Order is not transferable to any person except after notice to the Regional Water Board. The Regional Water Board may require modification or revocation and reissuance of the Order to change the name of the Discharger and incorporate such other requirements as may be necessary under the CWA and the Water Code [part 122.41(l)(3) and part 122.61].

III. STANDARD PROVISIONS – MONITORING

- A. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity [part 122.41(j)(1)].
- B. Monitoring results must be conducted according to test procedures under Part 136 or, in the case of sludge use or disposal, approved under Part 136 unless otherwise specified in Part 503 unless other test procedures have been specified in this Order [parts 122.41(j)(4) and 122.44(i)(1)(iv)].

IV. STANDARD PROVISIONS – RECORDS

- A.** Except for records of monitoring information required by this Order related to the Discharger's sewage sludge use and disposal activities, which shall be retained for a period of at least five years (or longer as required by Part 503), the Discharger shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this Order, and records of all data used to complete the application for this Order, for a period of at least three (3) years from the date of the sample, measurement, report or application. This period may be extended by request of the Regional Water Board Executive Officer at any time [part 122.41(j)(2)].
- B.** Records of monitoring information shall include:
1. The date, exact place, and time of sampling or measurements [part 122.41(j)(3)(i)];
 2. The individual(s) who performed the sampling or measurements [part 122.41(j)(3)(ii)];
 3. The date(s) analyses were performed [part 122.41(j)(3)(iii)];
 4. The individual(s) who performed the analyses [part 122.41(j)(3)(iv)];
 5. The analytical techniques or methods used [part 122.41(j)(3)(v)]; and
 6. The results of such analyses [part 122.41(j)(3)(vi)].
- C. Claims of confidentiality for the following information will be denied [part 122.7(b)]:**
1. The name and address of any permit applicant or Discharger [part 122.7(b)(1)]; and
 2. Permit applications and attachments, permits and effluent data [part 122.7(b)(2)].

V. STANDARD PROVISIONS – REPORTING

A. Duty to Provide Information

The Discharger shall furnish to the Regional Water Board, State Water Board, or USEPA within a reasonable time, any information which the Regional Water Board, State Water Board, or USEPA may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this Order or to determine compliance with this Order. Upon request, the Discharger shall also furnish to the Regional Water Board, State Water Board, or USEPA copies of records required to be kept by this Order [part 122.41(h)] [Water Code section 13267].

B. Signatory and Certification Requirements

1. All applications, reports, or information submitted to the Regional Water Board, State Water Board, and/or USEPA shall be signed and certified in accordance with

Standard Provisions – Reporting V.B.2, V.B.3, V.B.4, and V.B.5 below [part 122.41(k)].

- 2.** All permit applications shall be signed by a responsible corporate officer. For the purpose of this section, a responsible corporate officer means: (i) A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy- or decision-making functions for the corporation, or (ii) the manager of one or more manufacturing, production, or operating facilities, provided, the manager is authorized to make management decisions which govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures. [part 122.22(a)(1)].
- 3.** All reports required by this Order and other information requested by the Regional Water Board, State Water Board, or USEPA shall be signed by a person described in Standard Provisions – Reporting V.B.2 above, or by a duly authorized representative of that person. A person is a duly authorized representative only if:

 - a.** The authorization is made in writing by a person described in Standard Provisions – Reporting V.B.2 above [part 122.22(b)(1)];
 - b.** The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the company. (A duly authorized representative may thus be either a named individual or any individual occupying a named position.) [part 122.22(b)(2)]; and
 - c.** The written authorization is submitted to the Regional Water Board and State Water Board [part 122.22(b)(3)].
- 4.** If an authorization under Standard Provisions – Reporting V.B.3 above is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of Standard Provisions – Reporting V.B.3 above must be submitted to the Regional Water Board and State Water Board prior to or together with any reports, information, or applications, to be signed by an authorized representative [part 122.22(c)].

5. Any person signing a document under Standard Provisions – Reporting V.B.2 or V.B.3 above shall make the following certification:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.” [part 122.22(d)].

C. Monitoring Reports

1. Monitoring results shall be reported at the intervals specified in the Monitoring and Reporting Program (Attachment E) in this Order [part 122.22(l)(4)].
2. Monitoring results must be reported on a Discharge Monitoring Report (DMR) form or forms provided or specified by the Regional Water Board or State Water Board for reporting results of monitoring of sludge use or disposal practices [part 122.41(l)(4)(i)].
3. If the Discharger monitors any pollutant more frequently than required by this Order using test procedures approved under Part 136 or, in the case of sludge use or disposal, approved under Part 136 unless otherwise specified in Part 503, or as specified in this Order, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the DMR or sludge reporting form specified by the Regional Water Board [part 122.41(l)(4)(ii)].
4. Calculations for all limitations, which require averaging of measurements, shall utilize an arithmetic mean unless otherwise specified in this Order [part 122.41(l)(4)(iii)].

D. Compliance Schedules

Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this Order, shall be submitted no later than 14 days following each schedule date [part 122.41(l)(5)].

E. Twenty-Four Hour Reporting

1. The Discharger shall report any noncompliance that may endanger health or the environment. Any information shall be provided orally within 24 hours from the time the Discharger becomes aware of the circumstances. A written submission shall also be provided within five (5) days of the time the Discharger becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it

is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance [part 122.41(l)(6)(i)].

2. The following shall be included as information that must be reported within 24 hours under this paragraph [part 122.41(l)(6)(ii)]:
 - a. Any unanticipated bypass that exceeds any effluent limitation in this Order [part 122.41(l)(6)(ii)(A)].
 - b. Any upset that exceeds any effluent limitation in this Order [part 122.41(l)(6)(ii)(B)].
3. The Regional Water Board may waive the above-required written report under this provision on a case-by-case basis if an oral report has been received within 24 hours [part 122.41(l)(6)(iii)].

F. Planned Changes

The Discharger shall give notice to the Regional Water Board as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required under this provision only when [part 122.41(l)(1)]:

The Discharger shall give notice to the Regional Water Board as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required under this provision only when [part 122.41(l)(1)]:

1. The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in part 122.29(b) [part 122.41(l)(1)(i)]; or
2. The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants that are not subject to effluent limitations in this Order [part 122.41(l)(1)(ii)].

The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants that are subject neither to effluent limitations in this Order nor to notification requirements under section 122.42(a)(1) (see Additional Provisions—Notification Levels VII.A.1) [part 122.41(l)(1)(ii)].

G. Anticipated Noncompliance

The Discharger shall give advance notice to the Regional Water Board or State Water Board of any planned changes in the permitted facility or activity that may result in noncompliance with General Order requirements [part 122.41(l)(2)].

H. Other Noncompliance

The Discharger shall report all instances of noncompliance not reported under Standard Provisions – Reporting V.C, V.D, and V.E above at the time monitoring reports are submitted. The reports shall contain the information listed in Standard Provision – Reporting V.E above [part 122.41(l)(7)].

I. Other Information

When the Discharger becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Regional Water Board, State Water Board, or USEPA, the Discharger shall promptly submit such facts or information [part 122.41(l)(8)].

VI. STANDARD PROVISIONS – ENFORCEMENT

- A.** The Regional Water Board is authorized to enforce the terms of this permit under several provisions of the Water Code, including, but not limited to, sections 13385, 13386, and 13387.
- B.** The CWA provides that any person who violates section 301, 302, 306, 307, 308, 318 or 405 of the Act, or any permit condition or limitation implementing any such sections in a permit issued under section 402, or any requirement imposed in a pretreatment program approved under sections 402(a)(3) or 402(b)(8) of the Act, is subject to a civil penalty not to exceed \$25,000 per day for each violation. The CWA provides that any person who negligently violates sections 301, 302, 306, 307, 308, 318, or 405 of the Act, or any condition or limitation implementing any of such sections in a permit issued under section 402 of the Act, or any requirement imposed in a pretreatment program approved under section 402(a)(3) or 402(b)(8) of the Act, is subject to criminal penalties of \$2,500 to \$25,000 per day of violation, or imprisonment of not more than one (1) year, or both. In the case of a second or subsequent conviction for a negligent violation, a person shall be subject to criminal penalties of not more than \$50,000 per day of violation, or by imprisonment of not more than two (2) years, or both. Any person who knowingly violates such sections, or such conditions or limitations is subject to criminal penalties of \$5,000 to \$50,000 per day of violation, or imprisonment for not more than three (3) years, or both. In the case of a second or subsequent conviction for a knowing violation, a person shall be subject to criminal penalties of not more than \$100,000 per day of violation, or imprisonment of not more than six (6) years, or both. Any person who knowingly violates section 301, 302, 303, 306, 307, 308, 318 or 405 of the Act, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of the Act, and who knows at that time that he thereby places another person in imminent danger of death or serious bodily injury, shall, upon conviction, be subject to a fine of not more than \$250,000 or imprisonment of not more than 15 years, or both. In the case of a second or subsequent conviction for a knowing endangerment violation, a person shall be subject to a fine of not more than \$500,000 or by imprisonment of not more than 30 years, or both. An organization, as defined in section 309(c)(3)(B)(iii) of the CWA, shall, upon conviction of violating the imminent danger provision, be subject to a fine of not more than \$1,000,000 and can be fined up to

\$2,000,000 for second or subsequent convictions [*section 122.41(a)(2)*] [*Water Code sections 13385 and 13387*].

- C. Any person may be assessed an administrative penalty by the Regional Water Board for violating section 301, 302, 306, 307, 308, 318 or 405 of this Act, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of this Act. Administrative penalties for Class I violations are not to exceed \$10,000 per violation, with the maximum amount of any Class I penalty assessed not to exceed \$25,000. Penalties for Class II violations are not to exceed \$10,000 per day for each day during which the violation continues, with the maximum amount of any Class II penalty not to exceed \$125,000 [part *122.41(a)(3)*].
- D. The CWA provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than 2 years, or both. If a conviction of a person is for a violation committed after a first conviction of such person under this paragraph, punishment is a fine of not more than \$20,000 per day of violation, or by imprisonment of not more than 4 years, or both [part *122.41(j)(5)*].
- E. The CWA provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this Order, including monitoring reports or reports of compliance or noncompliance shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than six months per violation, or by both [part *122.41(k)(2)*].

VII. ADDITIONAL PROVISIONS – NOTIFICATION LEVELS

A. Non-Municipal Facilities

Existing manufacturing, commercial, mining, and silvicultural Dischargers shall notify the Regional Water Board as soon as they know or have reason to believe [part *122.42(a)*]:

1. That any activity has occurred or will occur that would result in the discharge, on a routine or frequent basis, of any toxic pollutant that is not limited in this Order, if that discharge will exceed the highest of the following "notification levels" [part *122.42(a)(1)*]:
 - a. 100 micrograms per liter ($\mu\text{g/L}$) [part *122.42(a)(1)(i)*];
 - b. 200 $\mu\text{g/L}$ for acrolein and acrylonitrile; 500 $\mu\text{g/L}$ for 2,4-dinitrophenol and 2-methyl-4,6-dinitrophenol; and 1 milligram per liter (mg/L) for antimony [part *122.42(a)(1)(ii)*];
 - c. Five (5) times the maximum concentration value reported for that pollutant in the Report of Waste Discharge [part *122.42(a)(1)(iii)*]; or

- d.** The level established by the Regional Water Board in accordance with part 122.44(f) [part 122.42(a)(1)(iv)].
- 2.** That any activity has occurred or will occur that would result in the discharge, on a non-routine or infrequent basis, of any toxic pollutant that is not limited in this Order, if that discharge will exceed the highest of the following “notification levels” [part 122.42(a)(2)]:
 - a.** 500 micrograms per liter ($\mu\text{g/L}$) [part 122.42(a)(2)(i)];
 - b.** 1 milligram per liter (mg/L) for antimony [part 122.42(a)(2)(ii)];
 - c.** Ten (10) times the maximum concentration value reported for that pollutant in the Report of Waste Discharge [part 122.42(a)(2)(iii)]; or
 - d.** The level established by the Regional Water Board in accordance with part 122.44(f) [part 122.42(a)(2)(iv)].

ATTACHMENT E – MONITORING AND REPORTING PROGRAM (MRP) NO. CI 7873

Table of Contents

I.	General Monitoring Provisions	E-2
II.	Monitoring Locations	E-5
III.	Influent Monitoring Requirements – Not Applicable	E-5
IV.	Effluent Monitoring Requirements	E-5
	A. Monitoring Location EFF-001	E-5
V.	Whole Effluent Toxicity Testing Requirements	E-8
	A. Definition of Toxicity	E-8
	B. Acute Toxicity Effluent Monitoring Program	E-8
	C. Quality Assurance	E-9
	D. Accelerated Monitoring and Initial Investigation TRE Trigger	E-9
	E. Toxicity Reduction Evaluation (TRE)/Toxicity Identification Evaluation (TIE) Trigger	E-10
	F. Steps in TRE and TIE Procedures	E-10
	G. Reporting	E-11
VI.	Land Discharge Monitoring Requirements – Not Applicable	E-13
VII.	Reclamation Monitoring Requirements – not applicable	E-13
VIII.	Receiving Water Monitoring Requirements – Surface Water and Groundwater	E-13
	A. Monitoring Location RSW-001	E-13
IX.	Other Monitoring Requirements	E-14
	A. Storm Water Monitoring	E-14
	B. Storm Water Pollution Prevention Plan (SWPPP), Best Management Practices Plan (BMPP), and Spill Contingency (SCP) Plan Status and Effectiveness Report	E-14
X.	Reporting Requirements	E-14
	A. General Monitoring and Reporting Requirements	E-14
	B. Self Monitoring Reports (SMRs)	E-15
	C. Other Reports	E-17

List of Tables

Table E-1.	Monitoring Station Locations	E-5
Table E-2.	Effluent Monitoring – EFF-001	E-5
Table E-3.	Receiving Water Monitoring Requirements	E-13
Table E-4.	Monitoring Periods and Reporting Schedule	E-15

ATTACHMENT E – MONITORING AND REPORTING PROGRAM (MRP) NO. CI 7873

The Code of Federal Regulations part 122.48 requires that all NPDES permits specify monitoring and reporting requirements. Water Code Sections 13267 and 13383 also authorize the Regional Water Quality Control Board (Regional Water Board) to require technical and monitoring reports. This MRP establishes monitoring and reporting requirements, which implement the federal and California regulations.

I. GENERAL MONITORING PROVISIONS

- A.** An effluent sampling station shall be established for the point of discharge (Discharge Point No. 001 [Latitude 33°45'52.43"N, Longitude 118°14'31.07"W]) and shall be located where representative samples of the effluent can be obtained.
- B.** Effluent samples shall be taken downstream of any addition to treatment works and prior to mixing with the receiving waters.
- C.** The Regional Water Quality Control Board (Regional Water Board) shall be notified in writing of any change in the sampling stations once established or in the methods for determining the quantities of pollutants in the individual waste streams.
- D.** Pollutants shall be analyzed using the analytical methods described in parts 136.3, 136.4, and 136.5 (revised March 12, 2007); or, where no methods are specified for a given pollutant, by methods approved by this Regional Water Board or the State Water Board. Laboratories analyzing effluent samples and receiving water samples shall be certified by the California Department of Public Health Environmental Laboratory Accreditation Program (ELAP) or approved by the Executive Officer and must include quality assurance/quality control (QA/QC) data in their reports. A copy of the laboratory certification shall be provided each time a new certification and/or renewal of the certification is obtained from ELAP.
- E.** For any analyses performed for which no procedure is specified in the USEPA guidelines or in the MRP, the constituent or parameter analyzed and the method or procedure used must be specified in the monitoring report.
- F.** Each monitoring report must affirm in writing that "all analyses were conducted at a laboratory certified for such analyses by the Department of Public Health or approved by the Executive Officer and in accordance with current U.S. Environmental Protection Agency (USEPA) guideline procedures or as specified in this MRP".
- G.** The monitoring reports shall specify the analytical method used, the Method Detection Limit (MDL), and the Minimum Level (ML) for each pollutant. For the purpose of reporting compliance with numerical limitations, performance goals, and receiving water limitations, analytical data shall be reported by one of the following methods, as appropriate:
 - 1. An actual numerical value for sample results greater than or equal to the ML; or

2. "Detected, but Not Quantified (DNQ)" if results are greater than or equal to the laboratory's MDL but less than the ML; or,
3. "Not-Detected (ND)" for sample results less than the laboratory's MDL with the MDL indicated for the analytical method used.

Analytical data reported as "less than" for the purpose of reporting compliance with permit limitations shall be the same or lower than the permit limit(s) established for the given parameter.

Current MLs (Attachment H) are those published by the State Water Board in the Policy for the Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California, February 24, 2005.

H. Where possible, the MLs employed for effluent analyses shall be lower than the permit limitations established for a given parameter. If the ML value is not below the effluent limitation, then the lowest ML value and its associated analytical method shall be selected for compliance purposes. At least once a year, the Discharger shall submit a list of the analytical methods employed for each test and associated laboratory QA/QC procedures.

The Regional Water Board, in consultation with the State Water Board Quality Assurance Program, shall establish a ML that is not contained in Attachment H to be included in the Discharger's permit in any of the following situations:

1. When the pollutant under consideration is not included in Attachment H;
2. When the Discharger and Regional Water Board agree to include in the permit a test method that is more sensitive than that specified in 40 CFR Part 136 (revised March 12, 2007);
3. When the Discharger agrees to use an ML that is lower than that listed in Attachment H;
4. When the Discharger demonstrates that the calibration standard matrix is sufficiently different from that used to establish the ML in Attachment H, and proposes an appropriate ML for their matrix; or,
5. When the Discharger uses a method whose quantification practices are not consistent with the definition of an ML. Examples of such methods are the USEPA-approved method 1613 for dioxins and furans, method 1624 for volatile organic substances, and method 1625 for semi-volatile organic substances. In such cases, the Discharger, the Regional Water Board, and the State Water Board shall agree on a lowest quantifiable limit and that limit will substitute for the ML for reporting and compliance determination purposes.

I. Water/wastewater samples must be analyzed within allowable holding time limits as specified in part 136.3. All QA/QC items must be run on the same dates the samples

were actually analyzed, and the results shall be reported in the Regional Water Board format, when it becomes available, and submitted with the laboratory reports. Proper chain of custody procedures must be followed, and a copy of the chain of custody shall be submitted with the report.

- J.** All analyses shall be accompanied by the chain of custody, including but not limited to data and time of sampling, sample identification, and name of person who performed sampling, date of analysis, name of person who performed analysis, QA/QC data, method detection limits, analytical methods, copy of laboratory certification, and a perjury statement executed by the person responsible for the laboratory.
- K.** The Discharger shall calibrate and perform maintenance procedures on all monitoring instruments and to insure accuracy of measurements, or shall insure that both equipment activities will be conducted.
- L.** The Discharger shall have, and implement, an acceptable written quality assurance (QA) plan for laboratory analyses. The annual monitoring report required in Section X.D shall also summarize the QA activities for the previous year. Duplicate chemical analyses must be conducted on a minimum of ten percent (10%) of the samples, or at least one sample per sampling period, whichever is greater. A similar frequency shall be maintained for analyzing spiked samples.
- M.** When requested by the Regional Water Board or USEPA, the Discharger will participate in the NPDES discharge monitoring report QA performance study. The Discharger must have a success rate equal to or greater than 80%.
- N.** For parameters that both average monthly and daily maximum limits are specified and the monitoring frequency is less than four times a month, the following shall apply. If an analytical result is greater than the average monthly limit, the Discharger shall collect four additional samples at approximately equal intervals during the month, until compliance with the average monthly limit has been demonstrated. All five analytical results shall be reported in the monitoring report for that month, or 45 days after results for the additional samples were received, whichever is later. In the event of noncompliance with an average monthly effluent limitation, the sampling frequency for that constituent shall be increased to weekly and shall continue at this level until compliance with the average monthly effluent limitation has been demonstrated. The Discharger shall provide for the approval of the Executive Officer a program to ensure future compliance with the average monthly limit.
- O.** In the event wastes are transported to a different disposal site during the report period, the following shall be reported in the monitoring report:
 - 1. Types of wastes and quantity of each type;
 - 2. Name and address for each hauler of wastes (or method of transport if other than by hauling); and

3. Location of the final point(s) of disposal for each type of waste.

If no wastes are transported off-site during the reporting period, a statement to that effect shall be submitted.

P. Each monitoring report shall state whether or not there was any change in the discharge as described in the Order during the reporting period.

Q. Laboratories analyzing monitoring samples shall be certified by the Department of Health Services, in accordance with the provision of Water Code section 13176, and must include quality assurance/quality control data with their reports.

II. MONITORING LOCATIONS

The Discharger shall establish the following monitoring locations to demonstrate compliance with the effluent limitations, discharge specifications, and other requirements in this Order:

Table E-1. Monitoring Station Locations

Discharge Point Name	Monitoring Location Name	Monitoring Location Description (include Latitude and Longitude when available)
001	EFF-001	A location where a representative sample of effluent can be obtained from Discharge Point No. 001 (33° 45' 52.43"N, 118° 14' 31.07"W), prior to discharge into the Cerritos Channel, Long Beach Inner Harbor.
--	RSW-001	A sampling station shall be established at a location outside the influence of the effluent discharge locations, and at least 50 feet in the opposite direction of tidal flow in the Cerritos Channel, Long Beach Inner Harbor.

III. INFLUENT MONITORING REQUIREMENTS – NOT APPLICABLE

IV. EFFLUENT MONITORING REQUIREMENTS

A. Monitoring Location EFF-001

1. The Discharger shall monitor discharges at EFF-001 as follows:

Table E-2. Effluent Monitoring – EFF-001

Parameter	Units	Sample Type	Minimum Sampling Frequency	Required Analytical Test Method
Total Waste Flow ¹	MGD	Metered	Once per discharge event ²	--
pH	standard units	Grab	Once per discharge event ²	3
Temperature	°F	Grab	Once per discharge event ²	3
Turbidity	NTU	Grab	Once per discharge event ²	3
Settleable solids	ml/L	Grab	Once per discharge event ²	3
Total Suspended solids	mg/L	Grab	Once per discharge event ²	3
Oil and grease	mg/L	Grab	Once per discharge event ²	3

Parameter	Units	Sample Type	Minimum Sampling Frequency	Required Analytical Test Method
Biochemical oxygen demand (5-day@ 20°C)	mg/L	Grab	Once per discharge event ²	3
Phenols, Total	mg/L	Grab	Once per discharge event ²	3
Sulfide, Total	mg/L	Grab	Once per discharge event ²	3
Residual Chlorine	mg/L	Grab	Once per discharge event ²	3
Ammonia Nitrogen, Total (as N)	mg/L	Grab	Once per discharge event ²	3
Copper, Total Recoverable	µg/l	Grab	Once per discharge event ²	3
Mercury	µg/l	Grab	Once per discharge event ²	3
Nickel, Total Recoverable	µg/l	Grab	Once per discharge event ²	3
Selenium, Total Recoverable	µg/l	Grab	Once per discharge event ²	3
Thallium, Total Recoverable	µg/l	Grab	Once per discharge event ²	3
Zinc, Total Recoverable	µg/l	Grab	Once per discharge event ²	3
Cyanide, Total (as CN)	µg/l	Grab	Once per discharge event ²	3
Total Petroleum Hydrocarbons (TPH)	µg/l	Grab	Once per discharge event ²	3, 4
Bis(2-ethylhexyl)phthalate	µg/l	Grab	Once per discharge event ²	3
Benzene	µg/l	Grab	Once per discharge event ²	3
Carbon tetrachloride	µg/l	Grab	Once per discharge event ²	3
Chloroform	µg/l	Grab	Once per discharge event ²	3
1,2-Dichloroethane	µg/l	Grab	Once per discharge event ²	3
1,1-Dichloroethylene	µg/l	Grab	Once per discharge event ²	3
Dichloromethane	µg/l	Grab	Once per discharge event ²	3
1,3-Dichloropropylene	µg/l	Grab	Once per discharge event ²	3
Ethylbenzene	µg/l	Grab	Once per discharge event ²	3
1,1,2,2-Tetrachloroethylene	µg/l	Grab	Once per discharge event ²	3
Tetrachloroethylene	µg/l	Grab	Once per discharge event ²	3
Toluene	µg/l	Grab	Once per discharge event ²	3
1,1,1-Trichloroethane	µg/l	Grab	Once per discharge event ²	3
1,1,2-Trichloroethane	µg/l	Grab	Once per discharge event ²	3
Trichloroethylene	µg/l	Grab	Once per discharge event ²	3
Vinyl chloride	µg/l	Grab	Once per discharge event ²	3
Xylene	µg/l	Grab	Once per discharge event ²	3
Ethylene dibromide	µg/l	Grab	Once per discharge event ²	3
Naphthalene	µg/l	Grab	Once per discharge event ²	3
Total Coliform	MPN/100 ml	Grab	Once per discharge event ²	3
Fecal Coliform	MPN/100 ml	Grab	Once per discharge event ²	3
Enterococcus	MPN/100 ml	Grab	Once per discharge event ²	3
Methyl Tertiary Butyl Ether (MTBE)	µg/L	Grab	Once per discharge event ²	3
Remaining Priority Pollutants ⁵	µg/l	Grab	1/Year ⁶	3
TCDD – Equivalents ⁷	ng/L	Grab	1/Year ⁶	3
Acute Toxicity ⁸	% survival	Grab	1/Year ⁶	3

¹ The Discharger shall measure flow using the flow meter on-site. The Discharger shall report the total daily flow (gallons/day).

- ² During periods of extended discharge, no more than one sample per week need to be taken. Sampling shall be performed during the first hour of discharge. If, for safety, reasons, a sample cannot be obtained during the first hour of discharge, a sample shall be obtained at the first safe opportunity, and the reason for the delay shall be included in the report.
- ³ Pollutants shall be analyzed using the analytical methods described in 40 CFR Part 136; for priority pollutants. The methods must meet the lowest minimum levels (MLs) specified in Attachment 4 of the SIP, provided as Attachment H. Where no methods are specified for a given pollutant, the methods must be approved by this Regional Water Board or the State Water Board.
- ⁴ Total petroleum hydrocarbons includes all fuels, gasoline, diesel and jet fuel. Analysis should be completed using USEPA Method 8015B for both the gas and diesel ranges.
- ⁵ Priority Pollutants as defined by the CTR defined in Finding II.I of the Limitations and Discharge Requirements of this Order, and included as Attachment I.
- ⁶ If there is no discharge to surface waters, then no monitoring is required. In the corresponding monitoring report, the Discharger will indicate under statement of perjury that no effluent was discharged to surface water.
- ⁷ The Discharger must monitor the effluent and receiving water for the presence of the 16 congeners of 2,3,7,8-TCDD listed below, once a year. The Discharger must multiply each measured or estimated congener concentration by its respective Toxicity Equivalent Factors (TEFs) and report these values:

Congeners	TEF
2,3,7,8-tetra CDD	1.0
1,2,3,7,8-penta CDD	1.0
1,2,3,4,7-hexa CDD	0.1
1,2,3,6,7,8-hexa CDD	0.1
1,2,3,7,8,9-hexa CDD	0.1
1,2,3,4,6,7,8-hepta CDD	0.01
Octa CDD	0.0001
2,3,7,8-tetra CDF	0.1
1,2,3,7,8 penta CDF	0.05
2,3,4,7,8-penta CDF	0.5
1,2,3,4,7,8-hexa CDF	0.1
1,2,3,6,7,8-hexa CDF	0.1
1,2,3,7,8,9-hexa CDF	0.1
2,3,4,6,7,8-hexa CDF	0.01
1,2,3,4,6,7,8-hepta CDF	0.01
1,2,3,4,7,8,9-hepta CDF	0.01
Octa CDF	0.0001

- ⁸ Refer to section V., Whole Effluent Toxicity Testing Requirements.

V. WHOLE EFFLUENT TOXICITY TESTING REQUIREMENTS

A. Definition of Toxicity

1. Acute Toxicity.

Acute toxicity is a measure of primarily lethal effects that occur over a 96-hour period. Acute toxicity shall be measured in percent survival measured in undiluted (100%) effluent.

- (a) The average survival in the undiluted effluent for any three (3) consecutive 96-hour static or continuous flow bioassay tests shall be at least 90%, and
- (b) No single test shall produce less than 70% survival.

2. **Accelerated Monitoring.** If either of the above requirements is not met, the Discharger shall conduct six additional tests over a 6-week period, if possible. The Discharger shall ensure that they receive results of a failing toxicity test within 24 hours of the close of the test and the additional tests shall begin within 3 business days of the receipt of the result. If the additional tests indicate compliance with the toxicity limitation, the Discharger may resume regular testing. However, if the results of any two of the six accelerated tests are less than the stipulated requirements, then the Discharger shall begin a Toxicity Identification Evaluation (TIE). The TIE shall include all reasonable steps to identify the sources of toxicity. Once the sources are identified, the Discharger shall take all reasonable steps to reduce toxicity to meet the objective.

If the initial test and any of the additional six acute toxicity bioassay tests result in less than 60% survival, including the initial test, the Discharger shall immediately begin a TIE.

B. Acute Toxicity Effluent Monitoring Program

1. The Discharger shall conduct acute toxicity tests on effluent grab samples by methods specified in Part 136 which cites USEPA's *Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms*, Fifth Edition, October 2002, USEPA, Office of Water, Washington D.C. (EPA/821-R-02-012) or a more recent edition to ensure compliance in 100 % effluent.
2. The fathead minnow, *Pimephales promelas*, shall be used as the test species for fresh water discharges and the topsmelt, *Atherinops affinis*, shall be used as the test species for brackish effluent. However, if the salinity of the receiving water is between 1 to 32 parts per trillion (ppt), the Discharger may have the option of using the inland silverslides, *Menidia beryllina*, instead of the topsmelt. The method for topsmelt is found in USEPA's *Method for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms*, Fifth Edition, October

2002, USEPA, Office of Water, Washington D.C. (EPA/821-R-02-012), or a more recent edition.

3. In lieu of conducting the standard acute toxicity testing with the topsmelt, the Discharger may elect to report the results or endpoint from the first 96 hours of the chronic toxicity test as the results of the acute toxicity test.
4. Effluent samples shall be collected after all treatment processes and before discharge to the receiving water.

C. Quality Assurance

1. Concurrent testing with a reference toxicant shall be conducted. Reference toxicant tests shall be conducted using the same test conditions as the effluent toxicity tests (e.g., same test duration, etc).
2. If either the reference toxicant test or effluent test does not meet all test acceptability criteria (TAC) as specified in the test methods manuals (EPA/600/4-91/002 and EPA/821-R-02-014), then the Discharger must re-sample and re-test at the earliest time possible.
3. Control and dilution water should be receiving water (if non-toxic) or laboratory water, as appropriate, as described in the manual. If the dilution water used is different from the culture water, a second control using culture water shall be used.

D. Accelerated Monitoring and Initial Investigation TRE Trigger

1. If toxicity exceeds the limitations (as defined in section V.A.1, above), then the Discharger shall immediately implement accelerated testing, as specified in Section V.A.2, above. The Discharger shall ensure that they receive results of a failing toxicity test within 24 hours of the completion of the test and the additional tests shall begin within 3 business days of receipt of the results or at the first opportunity of discharge. If the accelerated testing shows consistent toxicity, the Discharger shall immediately implement the Initial Investigation of the TRE Workplan.
2. If implementation of the Initial Investigation TRE Workplan indicates the source of toxicity (e.g., temporary plant upset, etc.), then the Discharger may discontinue the TIE.
3. The first step in the Initial Investigation TRE Workplan for downstream receiving water toxicity can be a toxicity test protocol designed to determine if the effluent from Discharge Point No. 001 causes or contributes to the measured downstream acute toxicity. If this first step TRE testing shows that the Discharge Point No. 001 effluent does not cause or contribute to downstream acute toxicity, using USEPA's *Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms*, Fifth Edition, October 2002, USEPA, Office of Water, Washington D.C. (EPA/821-R-02-012) then a report on this testing shall be submitted to the Regional Water Board and the Initial Investigation TRE will be

considered to be completed. Routine testing in accordance with the MRP shall be continued thereafter.

E. Toxicity Reduction Evaluation (TRE)/Toxicity Identification Evaluation (TIE) Trigger

1. If the accelerated testing shows consistent toxicity as defined below:
 - a. Acute Toxicity:
 - i. If the results of any two of the six accelerated tests are less than 90% survival, or
 - ii. If the initial test and any of the additional six acute toxicity bioassay tests result in less than 70% survival.

F. Steps in TRE and TIE Procedures

1. Following a TRE trigger, the Discharger shall initiate a TRE in accordance with the facility's Initial Investigation TRE workplan. At a minimum, the Discharger shall use USEPA manuals EPA/600/2-88/070 as guidance. The Discharger shall expeditiously develop a more detailed TRE workplan for submittal to the Executive Officer within 30 days of the trigger, which will include, but not be limited to:
 - a. Further actions to investigate and identify the cause of toxicity;
 - b. Actions the Discharger will take to mitigate the impact of the discharge and prevent the recurrence of toxicity;
 - c. Standards the Discharger will apply to consider the TRE complete and to return to normal sampling frequency; and,
 - d. A schedule for these actions.
2. The following is a stepwise approach in conducting the TRE:
 - a. Step 1 - Basic data collection. Data collected for the accelerated monitoring requirements may be used to conduct the TRE;
 - b. Step 2 - Evaluates optimization of the treatment system operation, facility housekeeping, and the selection and use of in-plant process chemicals;
 - c. Step 3 – If Steps 1 and 2 are unsuccessful, Step 3 implements a Toxicity Identification Evaluation (TIE) by employing all reasonable efforts and using currently available TIE methodologies. The Discharger shall use the USEPA acute and chronic manuals, EPA/600/6-91/005F (Phase I)/EPA/600/R-96-054 (for marine), EPA/600/R-92/080 (Phase II), and EPA-600/R-92/081 (Phase III) as guidance. The objective of the TIE is to identify the substance or combination of substances causing the observed toxicity;

- d. Step 4 – Assuming successful identification or characterization of the toxicant(s), Step 4 evaluates final effluent treatment options;
- e. Step 5 evaluates in-plant treatment options; and,
- f. Step 6 consists of confirmation once a toxicity control method has been implemented.

Many recommended TRE elements parallel source control, pollution prevention, and storm water control program best management practices (BMPs). To prevent duplication of efforts, evidence of implementation of these control measures may be sufficient to comply with TRE requirements. By requiring the first steps of a TRE to be accelerated testing and review of the facility's TRE workplan, a TRE may be ended in its early stages. All reasonable steps shall be taken to reduce toxicity to the required level. The TRE may be ended at any stage if monitoring indicates there is no longer toxicity (or six consecutive chronic toxicity test results are less than or equal to 1.0 TU_c or six consecutive acute toxicity test results are greater than 90% survival).

- 3. If a TRE/TIE is initiated prior to completion of the accelerated testing schedule required by this permit, then the accelerated testing schedule may be terminated, or used as necessary in performing the TRE/TIE, as determined by the Executive Officer.
- 4. Toxicity tests conducted as part of a TRE/TIE may also be used for compliance determination, if appropriate.
- 5. The Regional Water Board recognizes that toxicity may be episodic and identification of causes of and reduction of sources of toxicity may not be successful in all cases. Consideration of enforcement action by the Regional Water Board will be based in part on the Discharger's actions and efforts to identify and control or reduce sources of consistent toxicity.

G. Reporting

- 1. The Discharger shall submit a full report of the toxicity test results, including any accelerated testing conducted during the month as required by this permit. Test results shall be reported as % survival for acute toxicity test results and as TU_c for chronic toxicity test results with the self monitoring reports (SMR) for the month in which the test is conducted.
- 2. If an initial investigation indicates the source of toxicity and accelerated testing is unnecessary, then those results also shall be submitted with the SMR for the period in which the investigation occurred.
 - a. The full report shall be submitted on or before the end of the month in which the SMR is submitted.

- b. The full report shall consist of (1) the results; (2) the dates of sample collection and initiation of each toxicity test; (3) the acute toxicity and chronic toxicity; and (4) printout of the ToxCalc or CETIS program results.
3. Test results for toxicity tests also shall be reported according to the appropriate manual chapter on Report Preparation and shall be attached to the SMR. Routine reporting shall include, at a minimum, as applicable, for each test:
 - a. Sample date(s);
 - b. Test initiation date;
 - c. Test species;
 - d. End point values for each dilution (e.g., number of young, growth rate, percent survival);
 - e. NOEC value(s) in percent effluent;
 - f. IC₁₅, IC₂₅, IC₄₀ and IC₅₀ values in percent effluent;
 - g. TU_c values $\left(TU_c = \frac{100}{NOEC}\right)$;
 - h. Mean percent mortality (+standard deviation) after 96 hours in 100% effluent (if applicable);
 - i. NOEC and LOEC values for reference toxicant test(s);
 - j. IC25 value for reference toxicant test(s);
 - k. Any applicable charts; and
 - l. Available water quality measurements for each test (e.g., pH, D.O., temperature, conductivity, hardness, salinity, ammonia).
4. The Discharger shall provide a compliance summary, which includes a summary table of toxicity data from all samples collected during that year.

The Discharger shall notify by telephone or electronically, this Regional Water Board of any toxicity exceedance of the limit or trigger within 24 hours of receipt of the results followed by a written report within 14 calendar days of receipt of the results. The verbal or electronic notification shall include the exceedance and the plan the Discharger has taken or will take to investigate and correct the cause(s) of toxicity. It may also include a status report on any actions required by the permit, with a schedule for actions not yet completed. If no actions have been taken, the reasons shall be given.

VI. LAND DISCHARGE MONITORING REQUIREMENTS – NOT APPLICABLE

VII. RECLAMATION MONITORING REQUIREMENTS – NOT APPLICABLE

VIII. RECEIVING WATER MONITORING REQUIREMENTS – SURFACE WATER AND GROUNDWATER

A. Monitoring Location RSW-001

1. The Discharger shall monitor the Cerritos Channel at RSW-001 as follows:

Table E-3. Receiving Water Monitoring Requirements

Parameter	Units	Sample Type	Minimum Sampling Frequency	Required Analytical Test Method
pH	standard units	Grab	1/Year	1,2
Hardness (as CaCO ₃)	mg/L	Grab	1/Year	1,2
Salinity	g/L	Grab	1/Year	1,2
Temperature	°F	Grab	1/Year	1,2
Ammonia Nitrogen, Total (as N)	mg/L	Grab	1/Year	1
TCDD – Equivalents ³	ng/L	Grab	1/5 Years	1
Remaining Priority Pollutants ⁴	µg/L	--	1/Year	1,2

¹ Pollutants shall be analyzed using the analytical methods described in 40 CFR Part 136; for Priority Pollutants the methods must meet the lowest minimum levels (MLs) specified in Attachment 4 of the SIP, provided as Attachment H. Where no methods are specified for a given pollutant, the methods must be approved by this Regional Water Board or the State Water Board.

² Receiving water pH, salinity, and temperature must be analyzed at the same time, if possible, that the samples are collected for Priority Pollutants analysis.

³ The Discharger must monitor the effluent and receiving water for the presence of the 16 congeners of 2,3,7,8-TCDD listed below, once over the term of the permit, as early as practical (i.e., discharge occurs) . The Discharger must multiply each measured or estimated congener concentration by its respective Toxicity Equivalent Factors (TEFs) and report these values:

Congeners	TEF
2,3,7,8-tetra CDD	1.0
1,2,3,7,8-penta CDD	1.0
1,2,3,4,7-hexa CDD	0.1
1,2,3,6,7,8-hexa CDD	0.1
1,2,3,7,8,9-hexa CDD	0.1
1,2,3,4,6,7,8-hepta CDD	0.01
Octa CDD	0.0001
2,3,7,8-tetra CDF	0.1
1,2,3,7,8 penta CDF	0.05
2,3,4,7,8-penta CDF	0.5
1,2,3,4,7,8-hexa CDF	0.1
1,2,3,6,7,8-hexa CDF	0.1
1,2,3,7,8,9-hexa CDF	0.1
2,3,4,6,7,8-hexa CDF	0.01
1,2,3,4,6,7,8-hepta CDF	0.01
1,2,3,4,7,8,9-hepta CDF	0.01
Octa CDF	0.0001

- ⁴ Priority Pollutants as defined by the California Toxics Rule (CTR) defined in Finding II.I of the Limitations and Discharge Requirements of this Order, and included as Attachment I. Annual samples shall be collected during the first hour of discharge from the first storm event of the wet season (October 1 – May 30). If, for safety reasons, a sample cannot be obtained during the first hour of discharge, then a sample shall be obtained, at first safe opportunity within 12 hours of the beginning of storm water discharge.

IX. OTHER MONITORING REQUIREMENTS

A. Storm Water Monitoring

- 1. Rainfall Monitoring.** The Discharger shall measure and record the rainfall on each day of the month or submit the data obtained from the nearest city/county or National Oceanic and Atmospheric Administration (NOAA) operated rain gauge monitoring stations. This information shall be included in the monitoring report for that month.
- 2. Visual Observation.** The Discharger shall make visual observations of all storm water discharge locations on at least one storm event per month that produces a significant storm water discharge to observe the presence of floating and suspended materials, oil and grease, discoloration, turbidity, and odor. A “significant storm water discharge” is a continuous discharge of storm water for a minimum of one hour, or the intermittent discharge of storm water for a minimum of 3 hours in a 12-hour period.

B. Storm Water Pollution Prevention Plan (SWPPP), Best Management Practices Plan (BMPP), and Spill Contingency (SCP) Plan Status and Effectiveness Report

1. As required under Special Provision VI.C.3 of this Order, the Discharger shall submit an updated SWPPP and BMPP and SCP to the Executive Officer of the Regional Water Board for approval within 90 days of the effective date of this permit.
2. Annually the Discharger shall report the status of the implementation and the effectiveness of the SWPPP, BMPP, and SCP required under Special Provision VI.C.3 of this Order. The SWPPP, BMPP, and SCP shall be reviewed at a minimum once per year and updated as needed to ensure all actual or potential sources of pollutants in wastewater and storm water discharged from the facility are addressed in the SWPPP, BMPP, and SCP. All changes or revisions to the SWPPP, BMPP, or SCP will be summarized in the annual report required under Attachment E, Monitoring and Reporting, Section X.D.

X. REPORTING REQUIREMENTS

A. General Monitoring and Reporting Requirements

1. The Discharger shall comply with all Standard Provisions (Attachment D) related to monitoring, reporting, and recordkeeping.
2. If there is no discharge during any reporting period, the report shall so state.

3. Each monitoring report shall contain a separate section titled “Summary of Non-Compliance” which discusses the compliance record and corrective actions taken or planned that may be needed to bring the discharge into full compliance with waste discharge requirements. This section shall clearly list all non-compliance with waste discharge requirements, as well as all excursions of effluent limitations.
4. The Discharger shall inform the Regional Water Board well in advance of any proposed construction activity that could potentially affect compliance with applicable requirements.
5. The Discharger shall report the results of acute and chronic toxicity testing, TRE and TIE as required in the Attachment E, Monitoring and Reporting, Section V.F.

B. Self Monitoring Reports (SMRs)

1. At any time during the term of this permit, the State or Regional Water Board may notify the Discharger to electronically submit Self-Monitoring Reports (SMRs) using the State Water Board’s California Integrated Water Quality System (CIWQS) Program Web site (<http://www.waterboards.ca.gov/ciwqs/index.html>). Until such notification is given, the Discharger shall submit hard copy SMRs. The CIWQS Web site will provide additional directions for SMR submittal in the event there will be service interruption for electronic submittal.
2. The Discharger shall report in the SMR the results for all monitoring specified in this MRP under sections III through IX. The Discharger shall submit quarterly SMRs including the results of all required monitoring using USEPA-approved test methods or other test methods specified in this Order. If the Discharger monitors any pollutant more frequently than required by this Order, the results of this monitoring shall be included in the calculations and reporting of the data submitted in the SMR.
3. Monitoring periods and reporting for all required monitoring shall be completed according to the following schedule:

Table E-4. Monitoring Periods and Reporting Schedule

Sampling Frequency	Monitoring Period Begins On...	Monitoring Period	SMR Due Date
1/Year	March 6, 2010	January 1 through December 31	February 1
1 / Discharge Event	March 6, 2010	January 1 through March 31 April 1 through June 30 July 1 through September 30 October 1 through December 31	May 1 August 1 November 1 February 1

4. Reporting Protocols. The Discharger shall report with each sample result the applicable reported Minimum Level (ML) and the current Method Detection Limit (MDL), as determined by the procedure in Part 136.

The Discharger shall report the results of analytical determinations for the presence of chemical constituents in a sample using the following reporting protocols:

- a. Sample results greater than or equal to the reported ML shall be reported as measured by the laboratory (i.e., the measured chemical concentration in the sample).
- b. Sample results less than the RL, but greater than or equal to the laboratory's MDL, shall be reported as "Detected, but Not Quantified," or DNQ. The estimated chemical concentration of the sample shall also be reported.

For the purposes of data collection, the laboratory shall write the estimated chemical concentration next to DNQ as well as the words "Estimated Concentration" (may be shortened to "Est. Conc."). The laboratory may, if such information is available, include numerical estimates of the data quality for the reported result. Numerical estimates of data quality may be percent accuracy (+ a percentage of the reported value), numerical ranges (low to high), or any other means considered appropriate by the laboratory.

- c. Sample results less than the laboratory's MDL shall be reported as "Not Detected," or ND.
 - d. Dischargers are to instruct laboratories to establish calibration standards so that the ML value (or its equivalent if there is differential treatment of samples relative to calibration standards) is the lowest calibration standard. At no time is the Discharger to use analytical data derived from extrapolation beyond the lowest point of the calibration curve.
5. Compliance Determination. Compliance with effluent limitations for priority pollutants shall be determined using sample reporting protocols defined above and Attachment A of this Order. For purposes of reporting and administrative enforcement by the Regional and State Water Boards, the Discharger shall be deemed out of compliance with effluent limitations if the concentration of the priority pollutant in the monitoring sample is greater than the effluent limitation and greater than or equal to the reporting level (RL).
6. Multiple Sample Data. When determining compliance with an AMEL or MDEL for priority pollutants and more than one sample result is available, the Discharger shall compute the arithmetic mean unless the data set contains one or more reported determinations of "Detected, but Not Quantified" (DNQ) or "Not Detected" (ND). In those cases, the Discharger shall compute the median in place of the arithmetic mean in accordance with the following procedure:
- a. The data set shall be ranked from low to high, ranking the reported ND determinations lowest, DNQ determinations next, followed by quantified values (if any). The order of the individual ND or DNQ determinations is unimportant.
 - b. The median value of the data set shall be determined. If the data set has an odd number of data points, then the median is the middle value. If the data set has an even number of data points, then the median is the average of the two values around the middle unless one or both of the points are ND or DNQ, in which case

the median value shall be the lower of the two data points where DNQ is lower than a value and ND is lower than DNQ.

7. The Discharger shall submit SMRs in accordance with the following requirements:
 - a. The Discharger shall arrange all reported data in a tabular format. The data shall be summarized to clearly illustrate whether the facility is operating in compliance with interim and/or final effluent limitations. The Discharger is not required to duplicate the submittal of data that is entered in a tabular format within CIWQS. When electronic submittal of data is required and CIWQS does not provide for entry into a tabular format within the system, the Discharger shall electronically submit the data in a tabular format as an attachment.
 - b. The Discharger shall attach a cover letter to the SMR. The information contained in the cover letter shall clearly identify violations of the WDRs; discuss corrective actions taken or planned; and the proposed time schedule for corrective actions. Identified violations must include a description of the requirement that was violated and a description of the violation.
 - c. SMRs must be submitted to the Regional Water Board, signed and certified as required by the Standard Provisions (Attachment D), to the address listed below:

**California Regional Water Quality Control Board
Los Angeles Region
320 W. 4th Street, Suite 200
Los Angeles, CA 90013**

C. Other Reports

1. The Discharger shall report the results of any acute toxicity testing, and TRE/TIE studies, SWPPP, BMPP, and SCP required by Special Provisions – VI.C.2 and VI.C.3 of this Order. The Discharger shall submit reports with the first quarterly SMR scheduled to be submitted on or immediately following the report due date.
2. Within 90 days of the effective date of this permit, the Discharger is required to submit the following to the Regional Water Board:
 - a. Initial Investigation TRE workplan
 - b. Updated SWPPP
 - c. Updated BMPP
 - d. SCP

- 3.** By March 1 of each year, the Discharger shall submit an annual report to the Regional Water Board. The report shall contain the following:
 - a.** Both tabular and graphical summaries of the monitoring data obtained during the previous year,
 - b.** A discussion on the compliance record and the corrective actions taken or planned to bring the discharge into full compliance with the waste discharge requirements,
 - c.** A report discussing the following: 1) operation/maintenance problems; 2) changes to the facility operations and activities; 3) potential discharge of the pollutants associated with the changes and how these changes are addressed in the BMPP; SWPPP, and SCP and 4) calibration of flow meters or other equipment/device used to demonstrate compliance with effluent limitations of this Order.
 - d.** A report summarizing the quantities of all chemicals, listed by both trade and chemical names, which are used at the facility and which are discharged or have the potential to be discharged (See Section IX.B of the MRP, Attachment E).
 - e.** A report on the status of the implementation and the effectiveness of the SWPPP, BMPP, and SCP.
- 4.** The Discharger shall submit to the Regional Water Board, together with the first monitoring report required by this permit, a list of all chemicals and proprietary additives which could affect this waste discharge, including quantities of each. Any subsequent changes in types and/or quantities shall be reported promptly.
- 5.** If the Discharger wishes to participate in a coordinated receiving water, biomonitoring, and sediment monitoring program with other dischargers to the Cerritos Channel, then, the Discharger shall submit a report seeking approval of the Regional Water Board.
- 6.** This Regional Water Board requires the Discharger to file with the Regional Water Board, within 90 days after the effective date of this Order, a technical report on the preventive (failsafe) and contingency (cleanup) plans for controlling accidental discharges and for minimizing the effect of such events. The technical report should:
 - a.** Identify the possible sources of accidental loss, untreated waste bypass, and contaminated drainage. Loading and storage areas, power outage, waste treatment unit outage, and failure of process equipment, tanks and pipes should be considered.
 - b.** Evaluate the effectiveness of present facilities and procedures and state when they become operational.

- c.** Describe facilities and procedures needed for effective preventive and contingency plans.
- d.** Predict the effectiveness of the proposed facilities and procedures and provide an implementation schedule and contingent interim and final dates when they will be constructed, implemented, or operational.

This Regional Water Board, after review of the technical report, may establish conditions which it deems necessary to control accidental discharges and to minimize the effects of such events. Such conditions may be incorporated as part of this Order, upon notice to the Discharger.

ATTACHMENT F – FACT SHEET

Table of Contents

I.	Permit Information	F-3
II.	Facility Description	F-4
	A. Description of Wastewater Treatment or Controls	F-4
	B. Discharge Points and Receiving Waters.....	F-6
	C. Summary of Existing Requirements and Self-Monitoring Report (SMR) Data	F-6
	D. Compliance Summary.....	F-7
	E. Planned Changes	F-7
III.	Applicable Plans, Policies, and Regulations.....	F-7
	A. Legal Authorities	F-7
	B. California Environmental Quality Act (CEQA)	F-7
	C. State and Federal Regulations, Policies, and Plans	F-7
	D. Impaired Water Bodies on CWA 303(d) List	F-11
	E. Other Plans, Policies and Regulations – Not Applicable.....	F-11
IV.	Rationale For Effluent Limitations and Discharge Specifications.....	F-11
	A. Discharge Prohibitions	F-12
	B. Technology-Based Effluent Limitations.....	F-12
	1. Scope and Authority.....	F-12
	2. Applicable Technology-Based Effluent Limitations	F-13
	C. Water Quality-Based Effluent Limitations (WQBELs).....	F-15
	1. Scope and Authority.....	F-15
	2. Applicable Beneficial Uses and Water Quality Criteria and Objectives.....	F-15
	3. Determining the Need for WQBELs	F-17
	5. WQBELs based on Basin Plan Objectives	F-24
	6. Whole Effluent Toxicity (WET)	F-24
	7. Final WQBELs	F-25
	D. Final Effluent Limitations.....	F-26
	1. Satisfaction of Anti-Backsliding Requirements.....	F-26
	2. Satisfaction of Antidegradation Policy.....	F-26
	3. Stringency of Requirements for Individual Pollutants.....	F-27
	4. Mass-based Effluent Limitations	F-28
	E. Interim Effluent Limitations.....	F-28
	F. Land Discharge Specifications – Not Applicable.....	F-29
	G. Reclamation Specifications – Not Applicable.....	F-29
V.	Rationale for Receiving Water Limitations	F-29
	A. Surface Water.....	F-29
	B. Groundwater – Not Applicable	F-30
VI.	Rationale for Monitoring and Reporting Requirements.....	F-30
	A. Influent Monitoring – Not Applicable	F-30
	B. Effluent Monitoring.....	F-30
	C. Whole Effluent Toxicity Testing Requirements	F-30
	D. Receiving Water Monitoring.....	F-31
	1. Surface Water	F-31

- 2. Groundwater – Not Applicable F-31
- E. Other Monitoring Requirements – Not Applicable F-31
- VII. Rationale for Provisions F-31
 - A. Standard Provisions F-31
 - B. Special Provisions F-32
 - 1. Reopener Provisions F-32
 - 2. Special Studies and Additional Monitoring Requirements F-32
 - 3. Best Management Practices and Pollution Prevention F-32
 - 4. Construction, Operation, and Maintenance Specifications – Not Applicable F-32
 - 5. Special Provisions for Municipal Facilities (POTWs Only) – Not Applicable F-32
 - 6. Other Special Provisions – Not Applicable F-32
 - 7. Compliance Schedules – Not Applicable F-32
- VIII. Public Participation F-33
 - A. Notification of Interested Parties F-33
 - B. Written Comments F-33
 - C. Public Hearing F-33
 - D. Nature of Hearing F-34
 - E. Parties to the Hearing F-34
 - F. Public Comments and Submittal of Evidence F-34
 - G. Hearing Procedure F-34
 - H. Waste Discharge Requirements Petitions F-35
 - I. Information and Copying F-35
 - J. Register of Interested Persons F-35
 - K. Additional Information F-35

List of Tables

- Table F-1. Facility Information F-3
- Table F-2. Historic Effluent Limitations and Monitoring Data F-6
- Table F-3. Basin Plan Beneficial Uses F-8
- Table F-4. Summary of Technology-based Effluent Limitations F-14
- Table F-5. Applicable Water Quality Criteria (Priority Pollutants) F-16
- Table F-7. Summary Reasonable Potential Analysis F-19
- Table F-9. Summary of Water Quality-based Effluent Limitations for Discharge Point No. 001 F-25
- Table F-10. Summary of Final Effluent Limitations – Discharge Point No. 001 F-27
- Table F-11. Interim Effluent Limitations F-29

ATTACHMENT F – FACT SHEET

As described in section II of this Order, this Fact Sheet includes the legal requirements and technical rationale that serve as the basis for the requirements of this Order.

This Order has been prepared under a standardized format to accommodate a broad range of discharge requirements for Dischargers in California. Only those sections or subsections of this Order that are specifically identified as “not applicable” have been determined not to apply to this Discharger. Sections or subsections of this Order not specifically identified as “not applicable” are fully applicable to this Discharger.

I. PERMIT INFORMATION

The following table summarizes administrative information related to the facility.

Table F-1. Facility Information

WDID	4B192614001
Discharger	Vopak Terminal Long Beach, Incorporated
Name of Facility	Vopak Terminal Long Beach
Facility Address	3601 Dock Street
	San Pedro, CA 90731
	Los Angeles County
Facility Contact, Title and Phone	Eileen Oblea, 310-549-0961
Authorized Person to Sign and Submit Reports	Richard Sandell, Operations Manager, 310-549-0961
Mailing Address	SAME
Billing Address	SAME
Type of Facility	Bulk Liquid Chemical Storage and Transfer Terminal
Major or Minor Facility	Minor
Threat to Water Quality	2
Complexity	B
Pretreatment Program	N
Reclamation Requirements	N/A
Facility Permitted Flow	Discharge Point No. 001 – 288,000 gallons per day (GPD)
Facility Design Flow	Discharge Point No. 001 – 288,000 GPD
Watershed	Dominguez Channel and Los Angeles-Long Beach Harbors Watershed
Receiving Water	Cerritos Channel tributary to Long Beach Inner Harbor
Receiving Water Type	Enclosed Bay

- A. Vopak Terminal Long Beach, Incorporated (hereinafter Discharger) is the owner and operator of Vopak Terminal Long Beach (hereinafter Facility), a bulk chemical storage and transfer facility.

For the purposes of this Order, references to the “discharger” or “permittee” in applicable federal and state laws, regulations, plans, or policy are held to be equivalent to references to the Discharger herein.

- B.** The Facility discharges treated storm water and wastewater to the Cerritos Channel, tributary to the Long Beach Inner Harbor, a water of the United States, and is currently regulated by Order R4-2005-0007 which was adopted on January 27, 2005, and expired on December 10, 2009. The terms and conditions of the current Order have been automatically continued and remain in effect until new Waste Discharge Requirements and an NPDES permit are adopted pursuant to this Order.
- C.** The Discharger submitted an application for renewal of its Waste Discharge Requirements (WDRs) and a National Pollutant Discharge Elimination System (NPDES) permit on September 14, 2009.

II. FACILITY DESCRIPTION

The Discharger is the owner and operator of Vopak Terminal Long Beach located at 3601 Dock Street, San Pedro, California, which receives shipments of bulk liquid chemicals by ship and railcar, and stores raw products onsite in 55 aboveground storage tanks located within 16 separate diked containment areas. The Facility is located south of Cerritos Channel and occupies approximately 10.62 acres. Products stored and transported from the Facility include chlorinated solvents, non-halogenated solvents, caustics, organic liquids, amines, oil, and petroleum distillates. Tanker trucks are filled with the final products for distribution to businesses. The Facility discharges treated storm water and wastewater through Discharge Point No. 001 to the Cerritos Channel Long Beach Inner Harbor.

A. Description of Wastewater Treatment or Controls

Wastewaters discharged from the Facility include treated storm water, compressor condensate, fire system testing water, and truck rinse water. During storm events, the potential sources of pollutants in storm water runoff at the Facility are listed below:

- 1. Railcar Off-Loading Area** – Hazardous chemicals are off-loaded from railroad cars and transferred to the aboveground storage tanks in this area.
- 2. Marine Tanker Off-Loading Area** – Two spill pans are located on the dock for the purpose of containing spills or leaks.
- 3. Tank Truck Loading Area** – This area consists of five truck scales, four of which are located in scale pits, and the fifth being completely aboveground. A sixth loading spot is located on the east side of the Facility. All six loading areas have concrete secondary containment features.
- 4. Hydrostatic Test Area** – This area is used for pressure testing of marine tanker transfer piping. Accumulated storm water can be drained from the secondary containment area through a manual valve.

5. **Surfaces Near or On Tanks T-511 and T-218** – These tanks are used for the storage of chemicals with toxic characteristics, T-511 being used for the storage of trichloroethylene and T-218 being used for the storage of tetrachloroethylene.
6. **Hazardous Waste Storage Pad** – Small containers of chemical product samples are stored in walk-in storage cabinets and some waste handling takes place in this area.
7. **Aboveground Storage Tank Confinement Areas** – All storage tanks are used for the storage of chemicals.
8. **Forklift Truck Maintenance Area** – This area is used for the maintenance of forklift trucks and on-site vehicles. These operations involve the use of lubricating oils, solvents, and paints.
9. **ULSD Load Station** – This area consists of two bays of concrete containment and features automated self-loading by trained Facility employees.
10. **Off-Loading Gasoline Station #6** – This station receives gasoline via tank truck and features concrete containment.
11. **Off-Loading Naphthyl Station** – Naphthyl is pumped to the appropriate tank within concrete containment in this area.
12. **Drum Storage Area** – Drum storage areas are for the storage of chemical additives and empty drums. Chemical additives are stored within the naphthyl unloading area and empty drums are stored within a bermed area.

Storm water from the above mentioned areas flows by gravity to a centralized sump pump for treatment. The treatment system consists of one 50-micron pre-filter, two 10-micron filters, and two, 2,000-pound high pressure granular activated carbon (GAC) beds. The carbon beds can treat a maximum of 100 gallons per minute (144,000 x 2 beds = 288,000 gallons per day) with a 20 minute estimated bed time contact (EBTC). After treatment, representative water samples are obtained, tested for required analytical discharge parameters, and reviewed to affirm compliance with the NPDES discharge requirements prior to discharge.

The Facility has a network of 16 separate containment areas that isolate portions of the tank farm. This network includes a series of internal dikes that provide segregation of storm water and isolates spills. Four tanks have been designed to pump wastewater to a separate tank which collects wastewater that does not meet the NPDES requirements for discharge to surface waters. This wastewater is hauled offsite for further treatment or disposal.

The Facility had two discharge events since January of 2005, with a maximum discharge flow rate of 0.089 MGD. Domestic wastewater generated on-site is collected and hauled offsite for disposal.

B. Discharge Points and Receiving Waters

The Facility intermittently discharges wastewater through Discharge Point No. 001 (Latitude 33° 45' 52.43 North, Longitude 118° 14' 31.07" West) into the Cerritos Channel, a tributary to the Long Beach Inner Harbor, a water of the United States.

C. Summary of Existing Requirements and Self-Monitoring Report (SMR) Data

The Facility discharged wastewater once since the March 18, 2005, effective date of Order R4-2005-0007. Effluent limitations contained in the existing Order for discharges to the Cerritos Channel of the Long Beach Inner Harbor (Monitoring Location EFF-001) are summarized below with monitoring data from the single discharge event that occurred in September 2006.

Table F-2. Historic Effluent Limitations and Monitoring Data

Constituent	Units	Effluent Limitations		Monitoring Data from September 2006
		Average Monthly	Maximum Daily	Highest Daily Discharge
Flow	MGD	0.288		0.065
pH	standard units	Between 6.5 - 8.5 at all times		8.2
Temperature	°F	86 ^{1,2}		74.1
Turbidity	NTU	50	150	0.25
Settleable solids	ml/L	0.1	0.3	<0.1
Total suspended solids (TSS)	mg/L	50	60	<0.1
	lbs/day	120	360	<0.05
Oil and grease	mg/L	10	15	2.2
	lbs/day	24	36	1.2
Biochemical oxygen demand (5-day@ 20°C) (BOD ₅)	mg/L	20	30	4.58
	lbs/day	48	72	2.4
Phenols	mg/L	--	1	<0.05
	lbs/day	--	2.4	<0.027
Sulfide, Total	mg/L	--	1	<0.01
	lbs/day	--	2.4	<0.0054
Residual Chlorine	mg/L	--	0.1	< 0.1
	lbs/day	--	0.24	< 0.24
Tetrachloroethylene	µg/L	8.9	17.8	<0.5
	lbs/day	0.02	0.04	<0.0003
Vinyl Chloride	µg/L	36	--	<0.5
	lbs/day	0.09	--	<0.0003
Copper	µg/L	2.9	5.8	2.01
	lbs/day	0.007	0.014	0.001
Nickel	µg/L	6.8	13.6	1.27
	lbs/day	0.02	0.04	.0006
Thallium	µg/L	6.3	12.6	<0.3
	lbs/day	0.02	0.03	<0.0002
Zinc	µg/L	47.4	95.1	46.3
	lbs/day	0.11	0.23	0.025
Cyanide	µg/L	0.5	1.0	<5
	lbs/day	0.001	0.002	<0.003

Constituent	Units	Effluent Limitations		Monitoring Data from September 2006
		Average Monthly	Maximum Daily	Highest Daily Discharge
Total petroleum hydrocarbons	µg/L	--	100	<30
	lbs/day	--	0.24	<0.016
Bis(2-ethylhexyl)phthalate	µg/L	5.9	11.8	2.4
	lbs/day	0.014	0.028	0.001
Acute Toxicity	Percent survival	3		100

NR = Not Reported

- ¹ The discharge of an effluent in excess of 86°F is prohibited
- ² Discharge of an effluent with a maximum temperature more than 20°F above the natural receiving water temperature is prohibited.
- ³ Average survival in effluent for any three consecutive 96-hour static or continuous flow bioassay tests shall be at least 90%, with no single test producing less than 70% survival.

D. Compliance Summary

The Discharger had one discharge event during the term of the existing Order. There were no exceedances of the existing Order’s effluent limitations.

E. Planned Changes

The Discharger plans to discharge storm water to a Publicly Owned Treatment Work (POTW). This is estimated to occur by September 2010.

III. APPLICABLE PLANS, POLICIES, AND REGULATIONS

The requirements contained in the proposed Order are based on the requirements and authorities described in this section.

A. Legal Authorities

This Order is issued pursuant to section 402 of the federal Clean Water Act (CWA) and implementing regulations adopted by the U.S. Environmental Protection Agency (USEPA) and chapter 5.5, division 7 of the California Water Code (commencing with section 13370). It shall serve as an NPDES permit for point source discharges from this facility to surface waters. This Order also serves as WDRs pursuant to article 4, chapter 4, division 7 of the Water Code (commencing with section 13260).

B. California Environmental Quality Act (CEQA)

Under Water Code section 13389, this action to adopt an NPDES permit is exempt from the provisions of CEQA, Public Resources Code sections 21100 through 21177.

C. State and Federal Regulations, Policies, and Plans

1. **Water Quality Control Plans.** The Regional Water Board adopted a *Water Quality Control Plan for the Los Angeles Region* (hereinafter Basin Plan) on June 13, 1994, that designates beneficial uses, establishes water quality objectives, and contains

implementation programs and policies to achieve those objectives for all waters addressed through the plan. In addition, the Basin Plan implements State Water Resources Control Board (State Water Board) Resolution No. 88-63, which established state policy that all waters, with certain exceptions, should be considered suitable or potentially suitable for municipal or domestic supply. Cerritos Channel is a coastal waterbody. The Basin Plan Table 2-3 footnote “a” states that the “...beneficial use designations apply to all tributaries to the indicated waterbody, if not listed separately.” The Basin Plan does not specifically identify beneficial uses for Cerritos Channel, but does identify present and potential uses for Long Beach Inner Harbor, to which Cerritos Channel is tributary. The beneficial uses of the Long Beach Harbor are as follows:

Table F-3. Basin Plan Beneficial Uses

Discharge Point	Receiving Water Name	Beneficial Use(s)
001	Long Beach Inner Harbor	<p><u>Existing:</u> Industrial service supply (IND), navigation (NAV), non-contact recreation (REC-2), commercial and sport fishing (COMM), marine habitat (MAR), preservation of rare and endangered species (RARE).</p> <p><u>Potential:</u> Water contact recreation (REC-1), shellfish harvesting (SHELL).</p>

The *Water Quality Control Policy for the Enclosed Bays and Estuaries of California* (Enclosed Bays and Estuaries Policy), adopted by the State Water Resources Control Board (State Water Board), as Resolution No. 85-94 on November 16, 1995 states that:

It is the policy of the State Board that the discharge of municipal wastewaters and industrial process waters (exclusive of cooling water discharges) to enclosed bays and estuaries, other than the San Francisco Bay-Delta system, shall be phased out at the earliest practicable date. Exceptions to this provision may be granted by a Regional Water Board only when the Regional Water Board finds that the wastewater in question would consistently be treated and discharged in such a manner that it would enhance the quality of receiving waters above that which would occur in the absence of the discharge.

While the effluent from the Facility discharges into the Cerritos Channel, within the bay, the wastewater is comprised primarily of treated storm water, fire protection test water, truck rinse water, and compressor condensate water not industrial process water or municipal wastewater. Nonetheless, this Order contains provisions necessary to protect all beneficial uses.

Requirements of this Order implement the Basin Plan.

2. **Thermal Plan.** The State Water Board adopted a Water Quality Control Plan for Control of Temperature in the Coastal and Interstate Water and Enclosed Bays and Estuaries of California (Thermal Plan) on May 18, 1972, and amended this plan on September 18, 1975. This plan contains temperature objectives for surface waters. Requirements of this Order implement the Thermal Plan.
3. **Ammonia Basin Plan Amendment.** The 1994 Basin Plan provided water quality objectives for ammonia to protect aquatic life, in Tables 3-1 through 3-4. However, those ammonia objectives were revised on March 4, 2004, by the Regional Water Board with the adoption of Resolution No. 2004-022, *Amendment to the Water Quality Plan for the Los Angeles Region to Update the Ammonia Objectives for Inland Surface Waters Not Characteristic of Freshwater (including enclosed bays, estuaries and wetlands) with the Beneficial Use designations for protection of "Aquatic Life"*. The ammonia Basin Plan amendment was approved by the State Water Board on July 22, 2004, Office of Administrative Law on September 15, 2004, and by USEPA on May 19, 2005. The amendment revised the Basin Plan by updating the ammonia objectives for inland surface waters not characteristic of freshwater such that they are consistent with USEPA's *"Ambient Water Quality Criteria for Ammonia (Saltwater) – 1989."* The amendment revised the regulatory provisions of the Basin Plan by adding language to Chapter 3, "Water Quality Objectives."

For inland surface waters not characteristic of freshwater (including enclosed bays, estuaries, and wetlands), the proposed objectives are a 4-day average concentration of unionized ammonia of 0.035 mg/L, and a one-hour average concentration of unionized ammonia of 0.233 mg/L. The proposed objectives are fixed concentrations of unionized ammonia, independent of pH, temperature, or salinity. The proposed amendment includes an implementation procedure to convert unionized ammonia objectives to total ammonia effluent limits. The proposed amendment also simplifies the implementation procedures for translating ammonia objectives into effluent limits in situations where a mixing zone has been authorized by the Regional Water Board. Finally, the proposed amendment revises the implementation procedure for determining saltwater, brackish or freshwater conditions, to be consistent with the proposed objectives. The proposed objectives will apply only to inland surface waters not characteristic of freshwater (including enclosed bays, estuaries and wetlands) and do not impact the Ammonia Water Quality Objectives for ocean waters contained in the California Ocean Plan.

Data for ammonia from the Facility is not available to determine if effluent limitations would be necessary to protect water quality. Thus, no effluent limitation for ammonia is included in this Order; however, monitoring for ammonia has been established for both effluent and receiving waters. The Regional Water Board reserves the right to reopen the permit if effluent or receiving water data indicate that an effluent limitation for ammonia is appropriate.

4. **National Toxics Rule (NTR) and California Toxics Rule (CTR).** USEPA adopted the NTR on December 22, 1992, and later amended it on May 4, 1995, and

November 9, 1999. About forty criteria in the NTR applied in California. On May 18, 2000, USEPA adopted the CTR. The CTR promulgated new toxics criteria for California and, in addition, incorporated the previously adopted NTR criteria that were applicable in the state. The CTR was amended on February 13, 2001. These rules contain water quality criteria for priority pollutants.

- 5. State Implementation Policy.** On March 2, 2000, the State Water Board adopted the *Policy for Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California* (State Implementation Policy or SIP). The SIP became effective on April 28, 2000, with respect to the priority pollutant criteria promulgated for California by the USEPA through the NTR and to the priority pollutant objectives established by the Regional Water Board in the Basin Plan. The SIP became effective on May 18, 2000, with respect to the priority pollutant criteria promulgated by the USEPA through the CTR. The State Water Board adopted amendments to the SIP on February 24, 2005, that became effective on July 13, 2005. The SIP establishes implementation provisions for priority pollutant criteria and objectives and provisions for chronic toxicity control. Requirements of this Order implement the SIP.
- 6. Alaska Rule.** On March 30, 2000, USEPA revised its regulation that specifies when new and revised state and tribal water quality standards (WQS) become effective for CWA purposes (40 C.F.R. § 131.21, 65 Fed. Reg. 24641 (April 27, 2000)). Under the revised regulation (also known as the Alaska rule), new and revised standards submitted to USEPA after May 30, 2000, must be approved by USEPA before being used for CWA purposes. The final rule also provides that standards already in effect and submitted to USEPA by May 30, 2000, may be used for CWA purposes, whether or not approved by USEPA.
- 7. Antidegradation Policy.** 40 CFR part 131.12 requires that the state water quality standards include an antidegradation policy consistent with the federal policy. The State Water Board established California's antidegradation policy in State Water Board Resolution No. 68-16. Resolution No. 68-16 incorporates the federal antidegradation policy where the federal policy applies under federal law. Resolution No. 68-16 requires that existing water quality be maintained unless degradation is justified based on specific findings. The Regional Water Board's Basin Plan implements, and incorporates by reference, both the State and federal antidegradation policies. The permitted discharge must be consistent with the antidegradation provision of part 131.12 and State Water Board Resolution No. 68-16.
- 8. Anti-Backsliding Requirements.** Sections 402(o)(2) and 303(d)(4) of the CWA and federal regulations at title 40, Code of Federal Regulations¹ section 122.44(l) prohibit backsliding in NPDES permits. These anti-backsliding provisions require that effluent limitations in a reissued permit must be as stringent as those in the existing Order, with some exceptions in which limitations may be relaxed.

¹ All further statutory references are to title 40 of the Code of Federal Regulations unless otherwise indicated.

D. Impaired Water Bodies on CWA 303(d) List

Section 303(d) of the CWA requires states to identify specific water bodies where water quality standards are not expected to be met after implementation of technology-based effluent limitations on point sources. For all 303(d)-listed water bodies and pollutants, the Regional Water Board plans to develop and adopt TMDLs that will specify WLAs for point sources and load allocations (LAs) for non-point sources, as appropriate.

On June 28, 2007 USEPA gave final approval to California's 2006 section 303(d) List of Water Quality Limited Segments. Certain receiving waters in the Los Angeles and Ventura County watersheds do not fully support beneficial uses and therefore have been classified as impaired on the 2006 303(d) list and have been scheduled for TMDL development.

The Los Angeles/Long Beach Harbors are located in the southern portion of the Los Angeles Basin in the greater San Pedro Bay. These harbors receive discharges from highly industrialized areas. The 2006 State Water Board's California 303(d) List classifies the Los Angeles/Long Beach Inner Harbor and several water bodies within the Inner Harbor as impaired. These water bodies include Cabrillo Marina, Consolidated Slip, Fish Harbor, and Inner Cabrillo Beach Area. Cerritos Channel is tributary to Long Beach Inner Harbor. The pollutants of concern for Los Angeles/Long Beach Inner Harbor include beach closures, benthic community effects, copper, DDT, PCBs (polychlorinated biphenyls), sediment toxicity, and zinc. To date, no TMDLs have been approved for the Long Beach Inner Harbor and therefore no conditions in the Order are based on TMDLs.

E. Other Plans, Policies and Regulations – Not Applicable

IV. RATIONALE FOR EFFLUENT LIMITATIONS AND DISCHARGE SPECIFICATIONS

The CWA requires point source dischargers to control the amount of conventional, non-conventional, and toxic pollutants that are discharged into the waters of the United States. The control of pollutants discharged is established through effluent limitations and other requirements in NPDES permits. There are two principal bases for effluent limitations in the Code of Federal Regulations (CFR): part 122.44(a) requires that permits include applicable technology-based limitations and standards; and part 122.44(d) requires that permits include water quality-based effluent limitations to attain and maintain applicable numeric and narrative water quality criteria to protect the beneficial uses of the receiving water.

Effluent limitations at Discharge Point No. 001 were established for pH, temperature, turbidity, settleable solids, total suspended solids, oil and grease, BOD₅, and sulfides. The effluent limitations for these pollutants have been carried over from the existing Order. However, the maximum daily effluent limitation for turbidity has been changed from 150 mg/L to 75 mg/L to be consistent with the requirements in recently adopted permits for similar discharges. Products handled on-site include chlorinated solvents, nonhalogenated solvents, caustics, organic liquids, amines, petroleum and petro-chemical products. The potential for storm water and other wastewaters to contact hydrocarbons exists at the

Facility, thus effluent limitation for total petroleum hydrocarbons, phenols, tetrachloroethylene, vinyl chloride, and bis(2-ethylhexyl)phthalate remains applicable and have been carried over from the existing Order. Due to the nature of operations involving fire system testing, the effluent limitation for total residual chlorine was also carried over. Because pollutants stored on-site could contribute to acute toxicity, the existing Order established an effluent limitation for acute toxicity based on the requirements of the Basin Plan. The effluent limitation for acute toxicity remains applicable and has been carried over. Metals may also be present in storm water runoff from industrial sites and are considered pollutants of concern at this Facility. Therefore, effluent limitations were also established for certain metals based on the existing Order and the CTR.

Generally, mass-based effluent limitations ensure that proper treatment, and not dilution, is employed to comply with the final effluent concentration limitations. However, part 122.45(f)(1) requires that all permit limitations, standards or prohibitions be expressed in terms of mass units except under the following conditions: (1) for pH, temperature, radiation or other pollutants that cannot appropriately be expressed by mass limitations; (2) when applicable standards or limitations are expressed in terms of other units of measure; or (3) if in establishing technology-based permit limitation on a case-by-case basis limitation based on mass are infeasible because the mass or pollutant cannot be related to a measure of production. The limitations, however, must ensure that dilution will not be used as a substitute for treatment.

A. Discharge Prohibitions

The discharge prohibitions are based on the requirements of the Basin Plan, State Water Board's plans and policies, the Water Code, and existing Order provisions, and are consistent with the requirements set for other discharges regulated by NPDES permit to the Long Beach Inner Harbor.

B. Technology-Based Effluent Limitations

1. Scope and Authority

Section 301(b) of the CWA and implementing USEPA permit regulations at part 122.44, title 40 of the Code of Federal Regulations, require that permits include conditions meeting applicable technology-based requirements at a minimum, and any more stringent effluent limitations necessary to meet applicable water quality standards. The discharge authorized by this Order must meet minimum federal technology-based requirements based on Best Professional Judgment (BPJ) in accordance with part 125.3

The CWA requires that technology-based effluent limitations be established based on several levels of controls:

- a.** Best practicable treatment control technology (BPT) represents the average of the best performance by plants within an industrial category or subcategory. BPT standards apply to toxic, conventional, and non-conventional pollutants.

- b.** Best available technology economically achievable (BAT) represents the best existing performance of treatment technologies that are economically achievable within an industrial point source category. BAT standards apply to toxic and non-conventional pollutants.
- c.** Best conventional pollutant control technology (BCT) represents the control from existing industrial point sources of conventional pollutants including BOD₅, TSS, fecal coliform, pH, and oil and grease. The BCT standard is established after considering the “cost reasonableness” of the relationship between the cost of attaining a reduction in effluent discharge and the benefits that would result, and also the cost effectiveness of additional industrial treatment beyond BPT.
- d.** New source performance standards (NSPS) represent the best available demonstrated control technology standards. The intent of NSPS guidelines is to set limitations that represent state-of-the-art treatment technology for new sources.

The CWA requires USEPA to develop effluent limitations, guidelines and standards (ELGs) representing application of BPT, BAT, BCT, and NSPS. Section 402(a)(1) of the CWA and part 125.3 of the Code of Federal Regulations authorize the use of best professional judgment (BPJ) to derive technology-based effluent limitations on a case-by-case basis where ELGs are not available for certain industrial categories and/or pollutants of concern. Where BPJ is used, the permit writer must consider specific factors outlined in part 125.3.

2. Applicable Technology-Based Effluent Limitations

This Order includes technology-based effluent limitations based on BPJ in accordance with 40 CFR part 125.3. Effluent limitations for total suspended solids, oil and grease, BOD₅, turbidity, settleable solids, total petroleum hydrocarbons, phenols, total sulfide, and vinyl chloride have been carried over from the existing Order at Discharge Point No. 001. However, the maximum daily effluent limitation for turbidity has been changed from 150 mg/L to 75 mg/L to be consistent with the requirements in recently adopted permits for similar discharges. The limitations for these pollutants are consistent with technology-based limitations included in other Orders within the State for similar types of discharges.

The existing Order required the Discharger to develop and implement a Storm Water Pollution Prevention Plan (SWPPP). This Order will require the Discharger to update and continue to implement, consistent with the specifications included in Attachment G to the Order, a SWPPP. The SWPPP will outline site-specific management processes for minimizing storm water runoff contamination and for preventing contaminated storm water runoff from being discharged directly into the storm drain. At a minimum, the management practices should ensure that raw materials and chemicals do not come into contact with storm water in the undiked areas. Because storm water discharges may occur at the Facility, this Order will require that the Discharger update and continue to implement their SWPPP.

Due to the lack of national ELGs for storm water runoff from bulk liquid chemical storage and transfer facilities and the absence of data to apply BPJ to develop additional numeric effluent limitations, and pursuant to part 122.44(k), the Regional Water Board will require the Discharger to develop and implement Best Management Practices Plan (BMPP), which shall be included as part of the SWPPP. The purpose of the BMPP will be to establish site-specific procedures that will ensure proper operation and maintenance of equipment and storage areas, to ensure that unauthorized non-storm water discharges (i.e., process water, spills, diked storm water) do not occur at the Facility.

This Order requires the Discharger to develop a Spill Contingency Plan (SCP). The SCP is required in order to report on preventive and contingency (cleanup) procedures for controlling accidental discharges and for minimizing the adverse effects of such events.

The combination of the SWPPP, BMPP, and SCP plan, and existing limitations based on past performance and reflecting BPJ will serve as the equivalent of technology-based effluent limitations, in the absence of established ELGs, in order to carry out the purposes and intent of the CWA.

Table F-4. Summary of Technology-based Effluent Limitations

Constituent	Units	Effluent Limitations	
		Average Monthly	Maximum Daily
Turbidity	NTU	50	75
Settleable solids	ml/L	0.1	0.3
Total suspended solids	mg/L	50	60
	lbs/day ¹	120	144
Oil and grease	mg/L	10	15
	lbs/day ¹	24	36
Biochemical Oxygen Demand (5-day @ 20°C)	mg/L	20	30
	lbs/day ¹	48	72
Total petroleum hydrocarbons	µg/L	--	100
	lbs/day ¹		0.24
Phenols	mg/L	--	1.0
	lbs/day ¹		2.4
Sulfide, Total	mg/L	--	1.0
	lbs/day ¹		2.4
Vinyl Chloride	µg/L	36	--
	lbs/day ¹	0.09	--

¹ The mass emission rates (lbs/day) for Discharge Point 001 are based on the flow rate of 0.288 million gallons per day (mgd) using the formula:

$$m = 8.34 \times C_e \times Q$$

where: m = mass discharge for a pollutant, lb/day
C_e = limitation concentration for a pollutant, mg/L
Q = actual discharge flow rate, mgd

C. Water Quality-Based Effluent Limitations (WQBELs)

1. Scope and Authority

Section 301(b) of the CWA and part 122.44(d) require that permits include limitations more stringent than applicable federal technology-based requirements where necessary to achieve applicable water quality standards.

40 CFR part 122.44(d)(1)(i) mandates that permits include effluent limitations for all pollutants that are or may be discharged at levels that have the reasonable potential to cause or contribute to an exceedance of a water quality standard, including numeric and narrative objectives within a standard. Where reasonable potential has been established for a pollutant, but there is no numeric criterion or objective for the pollutant, water quality-based effluent limitations (WQBELs) must be established using: (1) USEPA criteria guidance under CWA section 304(a), supplemented where necessary by other relevant information; (2) an indicator parameter for the pollutant of concern; or (3) a calculated numeric water quality criterion, such as a proposed state criterion or policy interpreting the state's narrative criterion, supplemented with other relevant information, as provided in part 122.44(d)(1)(vi).

The process for determining reasonable potential and calculating WQBELs when necessary is intended to protect the designated uses of the receiving water as specified in the Basin Plan, and achieve applicable water quality objectives and criteria that are contained in other state plans and policies, or any applicable water quality criteria contained in the CTR and NTR.

The specific procedures for determining reasonable potential for discharges from the Facility, and if necessary for calculating WQBELs, are contained in the SIP.

2. Applicable Beneficial Uses and Water Quality Criteria and Objectives

As noted in Section II of the Limitations and Discharge Requirements, the Regional Water Board adopted a Basin Plan that designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for all waters addressed through the Basin Plan. The beneficial uses applicable to Long Beach Inner Harbor are summarized in Section III.C.1 of this Fact Sheet. The Basin Plan includes both narrative and numeric water quality objectives applicable to the receiving water.

Priority pollutant water quality criteria in the CTR are applicable to the Long Beach Inner Harbor. The CTR contains both saltwater and freshwater criteria. Because a distinct separation generally does not exist between freshwater and saltwater aquatic communities, the following apply, in accordance with part 131.38(c)(3), *“(1) freshwater criteria apply at salinities of 1 part per thousand (ppt) and below at locations where this occurs 95 percent or more of the time; (2) saltwater criteria apply at salinities of 10 parts per thousand and above at locations where this occurs 95% or more of the time; and (3) at salinities between 1 and 10 parts per thousand the more stringent of the two apply unless EPA approves the application of the*

freshwater or saltwater criteria based on an appropriate biological assessment.”
Based on the proximity of the discharge to the ocean and receiving water monitoring data, saltwater criteria are more appropriate for this discharge. As such, the CTR criteria for saltwater or human health for consumption of organisms, whichever is more stringent, are used to prescribe the effluent limitations in this Order to protect the beneficial uses of the Cerritos Channel, Long Beach Inner Harbor, a water of the United States in the vicinity of the discharge.

Table F-5 summarizes the applicable numeric water quality criteria/objective for priority pollutants reported in detectable concentrations in the effluent. These criteria were used in conducting the RPA for this Order.

Table F-5. Applicable Water Quality Criteria (Priority Pollutants)

CTR No.	Constituent	Selected Criteria	CTR/NTR Water Quality Criteria					
			Freshwater		Saltwater		Human Health for Consumption of:	
			Acute	Chronic	Acute	Chronic	Water & Organisms	Organisms only
			µg/L	µg/L	µg/L	µg/L	µg/L	µg/L
1	Antimony	4,300	N/A	N/A	--	--	N/A	4,300
2	Arsenic	36			69	36		--
4	Cadmium	9.4			42	9.4		Narrative
5a	Chromium (III)	No Criteria			--	--		--
6	Copper	3.73			5.78	3.73		--
7	Lead	8.52			220.83	8.52		Narrative
8	Mercury	0.051			Reserved	Reserved		0.051
9	Nickel	8.283			74.75	8.283		4,600
13	Zinc	85.62			95.14	85.62		--
14	Cyanide	1.00			1.00	1.00		220,000
24	Chloroethane	No Criteria			--	--		--
36	Methylene Chloride	1,600			--	--		1,600
44	Vinyl Chloride	525			--	--		525
68	Bis(2-Ethylhexyl)Phthalate	5.9			--	--		5.9
70	Butylbenzyl Phthalate	5,200			--	--		5,200
79	Diethyl Phthalate	120,000						120,000
81	Di-n-Butyl Phthalate	12,000						12,000
84	Di-n-Octyl Phthalate	No Criteria			--	--		--
96	N-Nitrosodimethylamine	8.1			--	--		8.1

“N/A” indicates that the water quality criteria for the protection of freshwater aquatic life and human health for the consumption of water and organisms are not applicable.

3. Determining the Need for WQBELs

In accordance with Section 1.3 of the SIP, the Regional Water Board conducts a reasonable potential analysis (RPA) for each priority pollutant with an applicable criterion or objective to determine if a WQBEL is required in the permit. The Regional Water Board analyzes effluent and receiving water data and identifies the maximum observed effluent concentration (MEC) and maximum background concentration (B) in the receiving water for each constituent. To determine reasonable potential, the MEC and the B are then compared with the applicable water quality objectives (C) outlined in the CTR, NTR, as well as the Basin Plan. For all pollutants that have a reasonable potential to cause or contribute to an excursion above a state water quality standard, numeric WQBELs are required. The RPA considers water quality criteria from the CTR and NTR, and when applicable, water quality objectives specified in the Basin Plan. To conduct the RPA, the Regional Water Board identifies the MEC and maximum background concentration in the receiving water for each constituent, based on data provided by the Discharger.

Section 1.3 of the SIP provides the procedures for determining reasonable potential to exceed applicable water quality criteria and objectives. The SIP specifies three triggers to complete a RPA:

- 1) Trigger 1 – If the $MEC \geq C$, a limit is needed.
- 2) Trigger 2 – If the background concentration (B) > C and the pollutant is detected in the effluent, a limit is needed.
- 3) Trigger 3 – If other related information such as CWA 303(d) listing for a pollutant, discharge type, compliance history, etc. indicates that a WQBEL is required.

Sufficient effluent and receiving water data are needed to conduct a complete RPA. If data are not sufficient, the Discharger may be required to gather the appropriate data for the Regional Water Board to conduct the RPA. Upon review of the data, and if the Regional Water Board determines that WQBELs are needed to protect the beneficial uses, the permit will be reopened for appropriate modification.

Order No. R4-2004-0007 was adopted by the Regional Water Board on January 27, 2005. However, the cover letter of the Order states that the effective date of Order No. R4-2004-0007 was March 18, 2005. A storm event occurred that resulted in discharges from the Facility from January 3, 2005, through March 11, 2005, prior to the effective date of Order No. R4-2004-0007. There were 37 days of discharges occurred from January 3, 2005, through March 11, 2005. The total flow of the discharges was 1,801,118 gallons and the maximum discharge was 89,970 gpd. Since limited priority pollutant data were available, data from the discharges from January 1, 2005, through March 11, 2005, and the data from the discharge event in May 2006, were used to perform an RPA for the priority pollutants

regulated in the CTR. Receiving water data utilized for the RPA consisted of four sampling events from May 12, 2005, through March 1, 2006, conducted by the Port of Los Angeles at Water Quality Monitoring Station No. LB-23 within the Los Angeles Inner Harbor, one half mile upstream of the discharge. Based on the RPA, pollutants that exhibit reasonable potential to cause or contribute to an exceedance of water quality criteria include copper, mercury, nickel, and zinc. Based on the RPA, effluent limitations for mercury have been established based on the CTR criteria. The calculated effluent limitations for copper, nickel, and zinc were the same as the effluent limitations in Order No. R4-2004-0007. There is insufficient data available to justify an exception to anti-backsliding regulations and relaxation of some effluent limitations. Therefore, effluent limits for tetrachloroethylene, thallium, cyanide, and bis(2-ethylhexyl)phthalate have been carried over from the existing Order.

Based on the RPA, pollutants that demonstrate reasonable potential for discharge through Discharge Point No. 001 are identified in Table F-7. Refer to Attachment J for a summary of the RPA and associated effluent limitation calculations.

Table F-7. Summary Reasonable Potential Analysis

CTR No.	Constituent name	Applicable Water Quality Criteria (C)	Max Effluent Conc. (MEC)	Maximum Detected Receiving Water Conc. (B)	RPA Result - Need Limit?	Reason
		µg/L	µg/L	µg/L		
1	Antimony	4,300	2.47	NA	No	MEC<C
2	Arsenic	36	1.16	1.4	No	MEC<C
4	Cadmium	9.4	0.235	0.047	No	MEC<C
5a	Chromium (III)	No Criteria	1.74	NA	No	No Criteria
6	Copper	3.73	6.5	2.07	Yes	MEC>=C
7	Lead	8.52	0.697	2.29	No	MEC<C
8	Mercury	0.051	1.18	0.4077	Yes	MEC>C
9	Nickel	8.283	18	0.05	Yes	MEC>=C
12	Thallium	6.3	ND	NA	Yes	Trigger 3 ¹
13	Zinc	85.62	960	9.82	Yes	MEC>=C
14	Cyanide	1.00	ND	NA	Yes	Trigger 3 ¹
24	Chloroethane	No Criteria	1.8	NA	No	No Criteria
36	Methylene Chloride	1,600	10.0	NA	No	MEC<C
38	Tetrachloroethylene	8.9	ND	NA	Yes	Trigger 3 ¹
44	Vinyl Chloride	525	1.7	NA	No	MEC<C
68	Bis(2-Ethylhexyl)Phthalate	5.9	5.5	NA	Yes	Trigger 3 ¹
70	Butylbenzyl Phthalate	5,200	2.9	NA	No	MEC<C
79	Diethyl Phthalate	120,000	0.45	NA	No	MEC<C
81	Di-n-Butyl Phthalate	12,000	0.21	NA	No	MEC<C
84	Di-n-Octyl Phthalate	No Criteria	10.0	NA	No	No Criteria
96	N-Nitrosodimethylamine	8.1	0.0034	NA	No	MEC<C

NA – Not available

ND – Not detected

¹ Order R4-2005-0007 contains a limitation for the parameter. An effluent limitation is retained to comply with anti-backsliding provisions 402.2 of the CWA.

4. WQBEL Calculations

The WQBELS for CTR/NTR constituents are calculated according to the procedures outlined in the SIP, as described below.

- a. If a reasonable potential exists to exceed applicable water quality criteria or objectives, then a WQBEL must be established in accordance with one or more

of the three procedures contained in Section 1.4 of the SIP. These procedures include:

- i. If applicable and available, use of the WLA established as part of a TMDL.
 - ii. Use of a steady-state model to derive maximum daily effluent limitations (MDELs) and average monthly effluent limitations (AMELs).
 - iii. Where sufficient effluent and receiving water data exist, use of a dynamic model, which has been approved by the Regional Water Board.
- b. Water quality-based effluent limits (final) for copper, mercury, nickel, thallium, zinc, cyanide, tetrachloroethylene, and bis(2-ethylhexyl)phthalate are based on monitoring results and following the procedure based on the steady-state model, available in Section 1.4 of the SIP.
- c. Section 1.4.2 of the SIP establishes procedures for granting mixing zones and dilution credits. Before establishing a dilution credit for a discharge, it must first be determined if, and how much (if any), receiving water is available to dilute the discharge. Adequate information to determine dilution credits is not available for the receiving water; therefore no dilution credit is assigned in this Order. However, in accordance with the reopener provision in Section VI.C.1.e., this Order may be reopened upon the submission by the Discharger of adequate information to establish appropriate dilution credits or a mixing zone, as determined by the Regional Water Board.
- d. WQBELs Calculation Example

Using nickel as an example, the following demonstrates how WQBELs were established for this Order. The tables in Attachment J summarize the development and calculation of all WQBELs for this Order using the process described below.

Concentration-Based Effluent Limitations

A set of AMEL and MDEL values are calculated separately, one set for the protection of aquatic life and the other for the protection of human health. The AMEL and MDEL limitations for aquatic life and human health are compared, and the most restrictive AMEL and the most restrictive MDEL are selected as the WQBEL.

Calculation of aquatic life AMEL and MDEL:

Step 1: For each constituent requiring an effluent limit, identify the applicable water quality criteria or objective. For each criteria determine the effluent concentration allowance (ECA) using the following steady state equation:

$$ECA = C + D(C-B) \text{ when } C > B, \text{ and}$$

$$ECA = C \quad \text{when } C \leq B$$

Where: C = The priority pollutant criterion/objective, adjusted if necessary for hardness, pH and translators
D = The dilution credit, and
B = The background concentration

As discussed above, for this Order, dilution was not allowed; therefore:

$$ECA = C$$

For nickel the applicable water quality criteria are (reference Table F-5):

$$ECA_{acute} = 74.75 \mu\text{g/L}$$

$$ECA_{chronic} = 8.283 \mu\text{g/L}$$

Step 2: For each ECA based on aquatic life criterion/objective, determine the long-term average discharge condition (LTA) by multiplying the ECA by a factor (multiplier). The multiplier is a statistically based factor that adjusts the ECA to account for effluent variability. The value of the multiplier varies depending on the coefficient of variation (CV) of the data set and whether it is an acute or chronic criterion/objective. Table 1 of the SIP provides pre-calculated values for the multipliers based on the value of the CV. Equations to develop the multipliers in place of using values in the tables are provided in Section 1.4, Step 3 of the SIP and will not be repeated here.

$$LTA_{acute} = ECA_{acute} \times \text{Multiplier}_{acute 99}$$

$$LTA_{chronic} = ECA_{chronic} \times \text{Multiplier}_{chronic 99}$$

The CV for the data set must be determined before the multipliers can be selected and will vary depending on the number of samples and the standard deviation of a data set. If the data set is less than 10 samples, or at least 80 percent of the samples in the data set are reported as non-detect, the CV shall be set equal to 0.6.

For nickel, the following data was used to develop the acute and chronic LTA using equations provided in Section 1.4, Step 3 of the SIP (Table 1 of the SIP also provides this data up to three decimals):

No. of Samples	CV	ECA Multiplier _{acute 99}	ECA Multiplier _{chronic 99}
4	0.60	0.321	0.527

$$LTA_{acute} = 74.75 \mu\text{g/L} \times 0.321 = 24 \mu\text{g/L}$$

$$LTA_{chronic} = 8.283 \mu\text{g/L} \times 0.527 = 4.365 = 4.37 \mu\text{g/L}$$

Step 3: Select the most limiting (lowest) of the LTA.

$$LTA = \text{most limiting of } LTA_{\text{acute}} \text{ or } LTA_{\text{chronic}}$$

For nickel, the most limiting LTA was the LTA_{chronic}

$$LTA = 4.37 \mu\text{g/L}$$

Step 4: Calculate the WQBELs by multiplying the LTA by a factor (multiplier). WQBELs are expressed as an Average Monthly Effluent Limitation (AMEL) and Maximum Daily Effluent Limitation (MDEL). The multiplier is a statistically-based factor that adjusts the LTA for the averaging periods and exceedance frequencies of the criteria/objectives and the effluent limitations. The value of the multiplier varies depending on the probability basis, the CV of the data set, the number of samples (for AMEL) and whether it is a monthly or daily limit. Table 2 of the SIP provides pre-calculated values for the multipliers based on the value of the CV and the number of samples. Equations to develop the multipliers in place of using values in the tables are provided in Section 1.4, Step 5 of the SIP and will not be repeated here.

$$AMEL_{\text{aquatic life}} = LTA \times AMEL_{\text{multiplier } 95}$$

$$MDEL_{\text{aquatic life}} = LTA \times MDEL_{\text{multiplier } 99}$$

AMEL multipliers are based on a 95th percentile occurrence probability, and the MDEL multipliers are based on the 99th percentile occurrence probability. If the number of samples is less than four (4), the default number of samples to be used is four (4).

For nickel, the following data was used to develop the AMEL and MDEL for aquatic life using equations provided in Section 1.4, Step 5 of the SIP (Table 2 of the SIP also provides this data up to two decimals):

No. of Samples Per Month	CV	Multiplier _{MDEL 99}	Multiplier _{AMEL 95}
4	0.6	3.1135	1.5519

$$AMEL_{\text{aquatic life}} = 4.37 \times 1.5519 = 6.782 = 6.78 \mu\text{g/L}$$

$$MDEL_{\text{aquatic life}} = 4.37 \times 3.1135 = 13.6059 = 13.61 \mu\text{g/L}$$

Calculation of human health AMEL and MDEL:

Step 5: For the ECA based on human health, set the AMEL equal to the $ECA_{\text{human health}}$

$$AMEL_{\text{human health}} = ECA_{\text{human health}}$$

For nickel

$$AMEL_{\text{human health}} = 4600 \mu\text{g/L}$$

Step 6: Calculate the MDEL for human health by multiplying the AMEL by the ratio of the $\text{Multiplier}_{\text{MDEL}}$ to the $\text{Multiplier}_{\text{AMEL}}$. Table 2 of the SIP provides pre-calculated ratios to be used in this calculation based on the CV and the number of samples.

$$MDEL_{\text{human health}} = AMEL_{\text{human health}} \times (\text{Multiplier}_{\text{MDEL}} / \text{Multiplier}_{\text{AMEL}})$$

For nickel, the following data were used to develop the $MDEL_{\text{human health}}$:

No. of Samples Per Month	CV	$\text{Multiplier}_{\text{MDEL } 99}$	$\text{Multiplier}_{\text{AMEL } 95}$	Ratio
4	0.6	3.1135	1.5519	2.01

$$MDEL_{\text{human health}} = 4600 \mu\text{g/L} \times 2.01 = 9200 \mu\text{g/L}$$

Step 7: Select the lower of the AMEL and MDEL based on aquatic life and human health as the WQBEL for the Order.

$AMEL_{\text{aq. life}}$	$MDEL_{\text{aq. life}}$	$AMEL_{\text{HH}}$	$MDEL_{\text{HH}}$
6.8	14	4600	9200

The lowest (most restrictive) effluent limits are based on aquatic toxicity and were incorporated into this Order. For copper and zinc there are no human health criteria; therefore, the AMEL and MDEL based on aquatic life criteria are established as the WQBELs. For nickel the AMEL and MDEL based on aquatic life criteria were more stringent than the AMEL and MDEL based on human health criteria. Therefore, the AMEL and MDEL based on aquatic life criteria for nickel are established as the WQBELs. For mercury, there are no aquatic life criteria; therefore, the AMEL and MDEL based on the human health criteria are established as the WQBELs. These limitations will be protective of aquatic life.

The effluent limitations for thallium, cyanide, tetrachloroethylene, and bis(2-ethylhexyl)phthalate were carried over from the existing permit.

e. Expression of WQBELs

NPDES regulations at 40 CFR 122.45(d) require that all effluent limitations be expressed, unless impracticable, as both maximum daily and average monthly effluent limits (MDEL and AMEL).

5. WQBELs based on Basin Plan Objectives

- a. **pH.** The Basin Plan states that the pH of inland surface waters shall not be depressed below 6.5 or raised above 8.5 as a result of waste discharge. Based on the requirements of the Basin Plan an instantaneous minimum limitation of 6.5 and an instantaneous maximum limitation of 8.5 for pH are included in the proposed Order. The effluent limitations for pH are carried forward from the previous Order.
- b. **Temperature.** The Basin Plan lists temperature requirements for the receiving waters and references the Thermal Plan. Based on the requirements of the Thermal Plan and a white paper developed by Regional Water Board staff entitled *Temperature and Dissolved Oxygen Impacts on Biota in Tidal Estuaries and Enclosed Bays in the Los Angeles Region*, a maximum effluent temperature limitation of 86 °F is included in the proposed Order. The white paper evaluated the optimum temperatures for steelhead, topsmelt, ghost shrimp, brown rock crab, jackknife clam, and blue mussel. A survey was completed for several kinds of fish and the 86°F temperature was found to be protective. The effluent limitation for temperature is carried forward from the previous Order.
- c. **Chlorine Residual.** The Basin Plan states that chlorine residual shall not be present in surface water discharges at concentrations that exceed 0.1 mg/L and shall not persist in receiving waters at any concentration that causes impairment of beneficial uses. Because residual chlorine is present in the municipal water supply used by the Discharger in fire testing and truck rinsing, there is reasonable potential for residual chlorine to be present in the discharge. Therefore, the effluent limitation for residual chlorine is carried forward from the previous Order.

6. Whole Effluent Toxicity (WET)

Whole effluent toxicity (WET) protects the receiving water quality from the aggregate toxic effect of a mixture of pollutants in the effluent. WET tests measure the degree of response of exposed aquatic test organisms to an effluent. The WET approach allows for protection of the narrative “no toxics in toxic amounts” criterion while implementing numeric criteria for toxicity. There are two types of WET tests: acute and chronic. An acute toxicity test is conducted over a short time period and measures mortality. A chronic toxicity test is conducted over a longer period of time and may measure mortality, reproduction, and growth.

The Basin Plan specifies a narrative objective for toxicity, requiring that all waters be maintained free of toxic substances in concentrations that are lethal to or produce

other detrimental responses by aquatic organisms. Detrimental response includes but is not limited to decreased growth rate, decreased reproductive success of resident or indicator species, and/or significant alterations in population, community ecology, or receiving water biota. The existing Order contains acute toxicity limitations and monitoring requirements in accordance with the Basin Plan, in which the acute toxicity objective for discharges dictates that the average survival in undiluted effluent for any three consecutive 96-hour static or continuous flow bioassay tests shall be at least 90%, with no single test having less than 70% survival. Consistent with Basin Plan requirements, this Order carries over the acute toxicity limitations and monitoring requirements from the existing Order to Discharge Point No. 001.

In addition to the Basin Plan requirements, Section 4 of the SIP states that a chronic toxicity effluent limitation is required in permits for all discharges that will cause, have the reasonable potential to cause, or contribute to chronic toxicity in receiving waters. The discharges from Discharge Point No. 001 are intermittent and are not expected to contribute to long-term toxic effects within the receiving water; therefore, no chronic toxicity limitations or monitoring requirements are included in this Order.

7. Final WQBELs

For copper, nickel, and zinc, the effluent limitations in the existing Order are the same as the calculated AMELs and MDELs, therefore these effluent limitations have been carried over from the previous Order. Table F-9 presents a summary of Final Effluent Limitations at Discharge Point No. 001.

Table F-9. Summary of Water Quality-based Effluent Limitations for Discharge Point No. 001

Pollutants	Units	Effluent Limitations			
		Average Monthly	Maximum Daily	Instantaneous Minimum	Instantaneous Maximum
pH	standard units	--	--	6.5	8.5
Temperature ¹	°F	--	--	--	86
Chlorine, Total Residual	mg/L	--	0.1	--	--
	lbs/day ²	--	0.24	--	--
Copper, Total Recoverable	µg/L	2.9	5.8	--	--
	lbs/day ²	0.007	0.014	--	--
Mercury	µg/L	0.05	0.10	--	--
	lbs/day ²	1.2E-04	2.4E-04	--	--
Nickel, Total Recoverable	µg/L	6.78	13.61	--	--
	lbs/day ²	0.02	0.03	--	--
Thallium, Total Recoverable	µg/L	6.3	13	--	--
	lbs/day ²	0.02	0.03	--	--
Zinc, Total Recoverable	µg/L	47	95	--	--
	lbs/day ²	0.11	0.23	--	--
Cyanide, Total (as CN)	µg/L	0.5	1.0	--	--
	lbs/day ²	0.001	0.002	--	--
Tetrachloro-ethylene	µg/L	8.9	17.8	--	--
	lbs/day ²	0.02	0.04	--	--

Pollutants	Units	Effluent Limitations			
		Average Monthly	Maximum Daily	Instantaneous Minimum	Instantaneous Maximum
Total petroleum hydrocarbons	µg/L	--	100	--	--
	lbs/day ²	--	0.24	--	--
Bis(2-ethylhexyl)-phthalate	µg/L	5.9	11.8	--	--
	lbs/day ²	0.01	0.03	--	--
Acute Toxicity	% survival	--	³	--	--

¹ The maximum temperature of the discharge shall not exceed the natural receiving water temperature by more than 20°F.

² The mass emission rates (lbs/day) for Discharge Point 001 are based on the flow rate of 0.288 mgd.

³ Average survival in effluent for any three consecutive 96-hour static or continuous flow bioassay tests shall be at least 90%, with no single test producing less than 70% survival.

D. Final Effluent Limitations

Section 402(o) of the CWA and part 122.44(l) require that effluent limitations or conditions in reissued Orders be at least as stringent as those in the existing Orders based on the submitted sampling data. Effluent limitations for pH, temperature, BOD₅, oil and grease, settleable solids, total suspended solids, turbidity, total sulfide chlorine residual, phenols, tetrachloroethylene, vinyl chloride, copper, thallium, cyanide, bis(2-ethylhexyl)phthalate, total petroleum hydrocarbons, and acute toxicity are being carried over from Order No. R4-2005-0007. The Regional Water Board has determined that these numeric effluent limitations continue to be applicable to the Facility. New effluent limitations for mercury are being established in this Order because the Facility's discharge was found to have reasonable potential to exceed water quality criteria.

1. Satisfaction of Anti-Backsliding Requirements

All effluent limitations in this Order are at least as stringent as the effluent limitations in the existing Order.

2. Satisfaction of Antidegradation Policy

40 CFR part 131.12 requires that the state water quality standards include an anti-degradation policy consistent with the federal policy. The State Water Board established California's antidegradation policy in State Water Board Resolution No. 68-16. Resolution No. 68-16 incorporates the federal antidegradation policy where the federal policy applies under federal law. Resolution No. 68-16 requires that existing water quality be maintained unless degradation is justified based on specific findings. The Regional Water Board's Basin Plan implements, and incorporates by reference, both the State and federal antidegradation policies.

The permitted discharges are consistent with the antidegradation provision of part 131.12 and State Water Board Resolution No. 68-16 and the final limitations in this Order are in compliance with antidegradation requirements and hold the Discharger to performance levels that will not cause or contribute to water quality impairment or further quality degradation that could result from an increase in permitted design flow or a reduction in the level of treatment.

3. Stringency of Requirements for Individual Pollutants

This Order contains both technology-based and water quality-based effluent limitations for individual pollutants. The technology-based effluent limitations consist of restrictions on turbidity, settleable solids, total suspended solids, oil and grease BOD₅, total sulfide, phenols, vinyl chloride, and total petroleum hydrocarbons. Restrictions on these parameters are discussed in section IV.B of this Fact Sheet. This Order’s technology-based pollutant restrictions implement the minimum, applicable federal technology-based requirements. These limitations are not more stringent than required by the CWA.

WQBELs have been scientifically derived to implement water quality objectives that protect beneficial uses. Both the beneficial uses and the water quality objectives have been approved pursuant to federal law and are the applicable federal water quality standards. To the extent that toxic pollutant water quality-based effluent limitations were derived from the CTR, the CTR is the applicable standard pursuant to part 131.38. The scientific procedures for calculating the individual WQBELs for priority pollutants are based on the CTR-SIP, which was approved by USEPA on May 18, 2000. All beneficial uses and water quality objectives contained in the Basin Plan were approved under state law and submitted to and approved by USEPA prior to May 30, 2000. Any water quality objectives and beneficial uses submitted to USEPA prior to May 30, 2000, but not approved by USEPA before that date, are nonetheless “applicable water quality standards for purposes of the CWA” pursuant to section 131.21(c)(1).

Table F-10. Summary of Final Effluent Limitations – Discharge Point No. 001

Pollutants	Units	Effluent Limitations				Basis ¹
		Average Monthly	Maximum Daily	Instantaneous Minimum	Instantaneous Maximum	
pH	standard units	--	--	6.5	8.5	E, BP
Temperature ²	°F	--	--	--	86	E, BP
Turbidity	NTU	50	75	--	--	E, BPJ
Settleable Solids	ml/L	0.1	0.3	--	--	E, BPJ
Total Suspended Solids	mg/L	50	60	--	--	E, BPJ
	lbs/day ³	120	144	--	--	
Oil and Grease	mg/L	10	15	--	--	E, BPJ
	lbs/day ³	24	36	--	--	
Biochemical Oxygen Demand (5-day@ 20 °C)	mg/L	20	30	--	--	E, BPJ
	lbs/day ³	48	72	--	--	
Phenols	mg/L	--	1.0	--	--	E, BPJ
	lbs/day ³	--	2.4	--	--	
Sulfide, Total	mg/L	--	1.0	--	--	E, BPJ
	lbs/day ³	--	2.4	--	--	
Chlorine, Total Residual	mg/L	--	0.1	--	--	E, BPJ
	lbs/day ³	--	0.24	--	--	

Pollutants	Units	Effluent Limitations				Basis ¹
		Average Monthly	Maximum Daily	Instantaneous Minimum	Instantaneous Maximum	
Copper, Total Recoverable	µg/L	2.9	5.8	--	--	E, CTR, SIP
	lbs/day ³	0.007	0.014	--	--	
Mercury	µg/L	0.05	0.10	--	--	CTR, SIP
	lbs/day ³	1.2E-04	2.4E-04	--	--	
Nickel, Total Recoverable	µg/L	6.78	13.61	--	--	E, CTR, SIP
	lbs/day ³	0.02	0.03	--	--	
Thallium, Total Recoverable	µg/L	6.3	13	--	--	E, CTR, SIP
	lbs/day ³	0.02	0.03	--	--	
Zinc, Total Recoverable	µg/L	47	95	--	--	E, CTR, SIP
	lbs/day ³	0.11	0.23	--	--	
Cyanide, Total (as CN)	µg/L	0.5	1.0	--	--	E, CTR, SIP
	lbs/day ³	0.001	0.002	--	--	
Total Petroleum Hydrocarbons	µg/L	--	100	--	--	E, BPJ
	lbs/day ³	--	0.24	--	--	
Tetrachloroethylene	µg/L	8.9	17.8	--	--	E, CTR
	lbs/day ³	0.021	0.042	--	--	
Vinyl Chloride	µg/L	36	--	--	--	E, BPJ
	lbs/day ³	0.09	--	--	--	
Bis(2-ethylhexyl) phthalate	µg/L	5.9	11.8	--	--	E, CTR, SIP
	lbs/day ³	0.01	0.03	--	--	
Acute Toxicity	% survival	--	³	--	--	E, BP

¹ BP = Basin Plan, E = Existing Permit, BPJ = Best Professional Judgment, CTR = California Toxics Rule, SIP = Policy for Implementation of Toxics Standards for Inland Surface Waters, Enclosed Bays, and Estuaries of California or State Implementation Policy.
² The maximum temperature of the discharge shall not exceed the natural receiving water temperature by more than 20°F
³ Based on a maximum flow rate of 0.288 MGD
⁴ Average survival in effluent for any three consecutive 96-hour static or continuous flow bioassay tests shall be at least 90%, with no single test producing less than 70% survival.

4. Mass-based Effluent Limitations

Mass-based effluent limitations are established using the following formula:

Mass (lbs/day) = flow rate (MGD) x 8.34 x effluent limitation (mg/L)
where: Mass = mass limitation for a pollutant (lbs/day)
 Effluent limitation = concentration limit for a pollutant (mg/L)
 Flow rate = discharge flow rate (MGD)

E. Interim Effluent Limitations

Based on effluent monitoring data submitted by the Discharger, a comparison between the MEC and calculated effluent limitation values shows that the Discharger may be unable to consistently comply with the effluent limitations established in this Order for mercury. Section 131.38(e) provides conditions under which interim effluent limitations

and compliance schedules may be issued. The SIP allows inclusion of an interim limitation with a specific compliance schedule included in an NPDES permit for priority pollutants, if the limitation for the priority pollutant is based on CTR criteria and the Discharger demonstrates that it is infeasible to achieve immediate compliance with the effluent limitations. As a result, this Order contains interim limitations for this parameter and a compliance schedule that allows the Discharger up to May 17, 2010, to comply with the final effluent limitations.

Pursuant to the SIP (Section 2.2.1, Interim Requirements under a Compliance Schedule), when compliance schedules are established in an Order, interim limitations must be included based on current treatment facility performance or existing permit limitations, whichever is more stringent to maintain existing water quality. There was no effluent limitation for mercury in the existing permit and there is insufficient data to perform a statistical analysis to develop interim limitation for mercury. Therefore, the MEC for mercury is established as the interim MDEL (1.18 µg/l).

It should be noted that the Regional Water Board might take appropriate enforcement actions if interim limitations and requirements are not met.

The SIP requires that the Regional Water Board establish other interim requirements such as requiring the discharger to develop a pollutant minimization plan and/or source control measures to achieve the final effluent limitations. These interim limitations shall be effective until May 17, 2010, after which, the Discharger shall demonstrate compliance with the final effluent limitations.

Table F-11. Interim Effluent Limitations

Parameter	Units	Maximum Daily Effluent Limitations
Mercury	µg/L	1.18
	lbs/day	0.003

F. Land Discharge Specifications – Not Applicable

G. Reclamation Specifications – Not Applicable

V. RATIONALE FOR RECEIVING WATER LIMITATIONS

A. Surface Water

The Basin Plan contains numeric and narrative water quality objectives applicable to all surface waters within the Los Angeles Region. Water quality objectives include an objective to maintain the high quality waters pursuant to federal regulations (part 131.12) and State Water Board Resolution No. 68-16. Receiving water limitations in this Order are included to ensure protection of beneficial uses of the receiving water and are based on the water quality objectives contained in the Basin Plan.

B. Groundwater – Not Applicable

VI. RATIONALE FOR MONITORING AND REPORTING REQUIREMENTS

40 CFR part 122.48 requires that all NPDES permits specify requirements for recording and reporting monitoring results. Water Code sections 13267 and 13383 authorizes the Regional Water Board to require technical and monitoring reports. The Monitoring and Reporting Program (MRP), Attachment E of this Order, establishes monitoring and reporting requirements to implement federal and state requirements. The following provides the rationale for the monitoring and reporting requirements contained in the MRP for this facility.

A. Influent Monitoring – Not Applicable

B. Effluent Monitoring

Monitoring for those pollutants expected to be present in the Monitoring Location EFF-001 at Discharge Point No. 001 will be required as shown on the proposed MRP. To determine compliance with effluent limitations, the proposed monitoring plan carries forward monitoring requirements from existing Regional Water Board Order No. R4-2005-0007. In addition, monitoring for mercury is included to determine compliance with the new effluent limitations established in this Order.

According to the SIP, the Discharger is required to monitor the effluent for the CTR priority pollutants, to determine reasonable potential. The monitoring requirements and frequencies of the priority pollutants in the proposed Order are consistent with those included in the existing Order.

Monitoring for TCDD-equivalents has been established based on Section 3 of the SIP. The SIP states that *“each RWQCB shall require (as described below) major and minor POTW and industrial dischargers in its region to conduct effluent monitoring for the 2,3,7,8 TCDD congeners...”*

Ammonia is a pollutant of concern because it is commonly found in storm water runoff at concentrations that may impact receiving waters. Data for ammonia from the Facility is not available to determine if effluent limitations would be necessary to protect water quality. Thus, monitoring for ammonia has been established for both effluent and receiving waters.

C. Whole Effluent Toxicity Testing Requirements

Whole effluent toxicity (WET) protects the receiving water quality from the aggregate toxic effect of a mixture of pollutants in the effluent. An acute toxicity test is conducted over a short time period and measures mortality. A chronic toxicity test is conducted over a longer period of time and may measure mortality, reproduction, and growth. This Order includes limitations for acute toxicity, and therefore, monitoring requirements are included in the MRP to determine compliance with the effluent limitations established in Limitations and Discharge Requirements, Effluent Limitations, Section IV.A.1.b.

Section 4 of the SIP states that a chronic toxicity effluent limitation is required in permits for all discharges that will cause, have the reasonable potential to cause, or contribute to chronic toxicity in receiving waters. The treated storm water discharge from this facility is short term and infrequent. Therefore, chronic toxicity testing will not be required.

D. Receiving Water Monitoring

1. Surface Water

Receiving water monitoring data is required to conduct an RPA. The receiving water monitoring of priority pollutants shall be conducted once per year. The receiving water samples shall be collected at a point that is outside the influence of the effluent discharge. This will be accomplished by collecting the sample at a location that is at least 50 feet from the point of discharge and is a direction that is opposite the direction of tidal flow at the discharge point at the time of collection. Because pH and temperature can affect the toxicity of some pollutants in the receiving water, the Discharger is also required to monitor pH and temperature at the same time as the priority pollutants are sampled.

Visual monitoring of the receiving water has been established based on the existing MRP, to evaluate compliance with receiving water limitations and Basin Plan objectives.

2. Groundwater – Not Applicable

E. Other Monitoring Requirements – Not Applicable

VII. RATIONALE FOR PROVISIONS

A. Standard Provisions

Standard Provisions, which apply to all NPDES permits in accordance with part 122.41, and additional conditions applicable to specified categories of permits in accordance with part 122.42, are provided in Attachment D. The discharger must comply with all standard provisions and with those additional conditions that are applicable under part 122.42.

40 CFR part 122.41(a)(1) and (b) through (n) establish conditions that apply to all State-issued NPDES permits. These conditions must be incorporated into the permits either expressly or by reference. If incorporated by reference, a specific citation to the regulations must be included in the Order. Part 123.25(a)(12) allows the state to omit or modify conditions to impose more stringent requirements. In accordance with part 123.25, this Order omits federal conditions that address enforcement authority specified in parts 122.41(j)(5) and (k)(2) because the enforcement authority under the Water Code is more stringent. In lieu of these conditions, this Order incorporates by reference Water Code section 13387(e).

B. Special Provisions

1. Reopener Provisions

These provisions are based on 40 CFR Part 123 and the existing Order. The Regional Water Board may reopen the permit to modify permit conditions and requirements. Causes for modifications include the promulgation of new federal regulations, modification in toxicity requirements, or adoption of new regulations by the State Water Board or Regional Water Board, including revisions to the Basin Plan.

2. Special Studies and Additional Monitoring Requirements

- a. Initial Investigation Toxicity Reduction Evaluation Workplan. This provision is based on section 4 of the SIP, Toxicity Control Provisions.

3. Best Management Practices and Pollution Prevention

This provision is based on section 122.44(k) and includes the requirement to develop a SWPPP, BMPP, and Spill Contingency Plan.

4. Construction, Operation, and Maintenance Specifications – Not Applicable

5. Special Provisions for Municipal Facilities (POTWs Only) – Not Applicable

6. Other Special Provisions – Not Applicable

7. Compliance Schedules – Not Applicable

VIII. PUBLIC PARTICIPATION

The California Regional Water Quality Control Board, Los Angeles Region (Regional Water Board) is considering the issuance of waste discharge requirements (WDRs) that will serve as a National Pollutant Discharge Elimination System (NPDES) permit for Vopak Terminal Long Beach. As a step in the WDR adoption process, the Regional Water Board staff has developed tentative WDRs. The Regional Water Board encourages public participation in the WDR adoption process.

A. Notification of Interested Parties

The Regional Water Board has notified the Discharger and interested agencies and persons of its intent to prescribe waste discharge requirements for the discharge and has provided them with an opportunity to submit their written comments and recommendations.

B. Written Comments

The staff determinations are tentative. Interested persons are invited to submit written comments concerning these tentative WDRs. Comments must be submitted either in person or by mail to the Executive Office at the Regional Water Board at the address above on the cover page of this Order.

To be fully responded to by staff and considered by the Regional Water Board, written comments must be received at the Regional Water Board offices by 5:00 p.m. on January 18, 2010.

C. Public Hearing

The Regional Water Board will hold a public hearing on the tentative WDRs during its regular Board meeting on the following date and time and at the following location:

Date: February 4, 2010
Time: 9:00 A.M.
Location: Metropolitan Water District of Southern California, Board Room
700 North Alameda Street, Los Angeles, California.

Interested persons are invited to attend. At the public hearing, the Regional Water Board will hear testimony, if any, pertinent to the discharge, WDRs, and permit. Oral testimony will be heard; however, for accuracy of the record, important testimony should be in writing.

Please be aware that dates and venues may change. Our Web address is <http://www.waterboards.ca.gov/losangeles> where you can access the current agenda for changes in dates and locations.

D. Nature of Hearing

This will be a formal adjudicative hearing pursuant to section 648 et seq. of title 23 of the California Code of Regulations. Chapter 5 of the California Administrative Procedure Act (commencing with section 11500 of the Government Code) will not apply to this proceeding.

Ex Parte Communications Prohibited: As a quasi-adjudicative proceeding, no board member may discuss the subject of this hearing with any person, except during the public hearing itself. Any communications to the Regional Water Board must be directed to staff.

E. Parties to the Hearing

The following are the parties to this proceeding:

1. The applicant/permittee

Any other persons requesting party status must submit a written or electronic request to staff not later than 20 business days before the hearing. All parties will be notified if other persons are so designated.

F. Public Comments and Submittal of Evidence

Persons wishing to comment upon or object to the tentative waste discharge requirements, or submit evidence for the Board to consider, are invited to submit them in writing to the above address. To be evaluated and responded to by staff, included in the Board's agenda folder, and fully considered by the Board, written comments must be received no later than close of business on January 18, 2010. Comments or evidence received after that date will be submitted, ex agenda, to the Board for consideration, but only included in administrative record with express approval of the Chair during the hearing. Additionally, if the Board receives only supportive comments, the permit may be placed on the Board's consent calendar, and approved without an oral testimony.

G. Hearing Procedure

The meeting, in which the hearing will be a part of, will start at 9:00 a.m. Interested persons are invited to attend. Staff will present the matter under consideration, after which oral statements from parties or interested persons will be heard. For accuracy of the record, all important testimony should be in writing. The Board will include in the administrative record written transcriptions of oral testimony that is actually presented at the hearing. Oral testimony may be limited to 3 minutes maximum or less for each speaker, depending on the number of persons wishing to be heard. Parties or persons with similar concerns or opinions are encouraged to choose one representative to speak. At the conclusion of testimony, the Board will deliberate in open or close session, and render a decision.

Parties or persons with special procedural requests should contact staff. Any procedure not specified in this hearing notice will be waived pursuant to section 648(d) of title 23 of the California Code of Regulations. Objections to any procedure to be used during this hearing must be submitted in writing not later than close of 15 business days prior to the date of the hearing. Procedural objections will not be entertained at the hearing.

H. Waste Discharge Requirements Petitions

Any aggrieved person may petition the State Water Resources Control Board to review the decision of the Regional Water Board regarding the final WDRs. The petition must be submitted within 30 days of the Regional Water Board's action to the following address:

State Water Resources Control Board
Office of Chief Counsel
P.O. Box 100, 1001 I Street
Sacramento, CA 95812-0100

I. Information and Copying

The Report of Waste Discharge (ROWD), related documents, tentative effluent limitations and special provisions, comments received, and other information are on file and may be inspected at the address above at any time between 8:30 a.m. and 4:45 p.m., Monday through Friday. Copying of documents may be arranged through the Regional Water Board by calling (213) 576 – 6600.

J. Register of Interested Persons

Any person interested in being placed on the mailing list for information regarding the WDRs and NPDES permit should contact the Regional Water Board, reference this facility, and provide a name, address, and phone number.

K. Additional Information

Requests for additional information or questions regarding this order should be directed to Rosario Aston at (213) 576-6653.

ATTACHMENT G – STORM WATER POLLUTION PREVENTION PLAN REQUIREMENTS

I. Implementation Schedule

A storm water pollution prevention plan (SWPPP) shall be developed and submitted to the Regional Water Board within 90 days following the adoption of this Order. The SWPPP shall be implemented for each facility covered by this Permit within 10 days of approval from the Regional Water Board, or 6-months from the date of the submittal of the SWPPP to the Regional Water Board (whichever comes first).

II. Objectives

The SWPPP has two major objectives: (a) to identify and evaluate sources of pollutants associated with industrial activities that may affect the quality of storm water discharges and authorized non-storm water discharges from the facility; and (b) to identify and implement site- specific best management practices (BMPs) to reduce or prevent pollutants associated with industrial activities in storm water discharges and authorized non-storm water discharges. BMPs may include a variety of pollution prevention measures or other low-cost and pollution control measures. They are generally categorized as non-structural BMPs (activity schedules, prohibitions of practices, maintenance procedures, and other low-cost measures) and as structural BMPs (treatment measures, run-off controls, overhead coverage.) To achieve these objectives, facility operators should consider the five phase process for SWPPP development and implementation as shown in Table A.

The SWPPP requirements are designed to be sufficiently flexible to meet the needs of various facilities. SWPPP requirements that are not applicable to a facility should not be included in the SWPPP.

A facility's SWPPP is a written document that shall contain a compliance activity schedule, a description of industrial activities and pollutant sources, descriptions of BMPs, drawings, maps, and relevant copies or references of parts of other plans. The SWPPP shall be revised whenever appropriate and shall be readily available for review by facility employees or Regional Water Board inspectors.

III. Planning and Organization

A. Pollution Prevention Team

The SWPPP shall identify a specific individual or individuals and their positions within the facility organization as members of a storm water pollution prevention team responsible for developing the SWPPP, assisting the facility manager in SWPPP implementation and revision, and conducting all monitoring program activities required in Attachment E of this Permit. The SWPPP shall clearly identify the Permit related responsibilities, duties, and activities of each team member. For small facilities, storm water pollution prevention teams may consist of one individual where appropriate.

B. Review Other Requirements and Existing Facility Plans

The SWPPP may incorporate or reference the appropriate elements of other regulatory requirements. Facility operators should review all local, State, and Federal requirements that impact, complement, or are consistent with the requirements of this General Permit. Facility operators should identify any existing facility plans that contain storm water pollutant control measures or relate to the requirements of this Permit. As examples, facility operators whose facilities are subject to Federal Spill Prevention Control and Countermeasures' requirements should already have instituted a plan to control spills of certain hazardous materials. Similarly, facility operators whose facilities are subject to air quality related permits and regulations may already have evaluated industrial activities that generate dust or particulates.

IV. Site Map

The SWPPP shall include a site map. The site map shall be provided on an 8-½ x 11 inch or larger sheet and include notes, legends, and other data as appropriate to ensure that the site map is clear and understandable. If necessary, facility operators may provide the required information on multiple site maps.

TABLE A FIVE PHASES FOR DEVELOPING AND IMPLEMENTING INDUSTRIAL STORM WATER POLLUTION PREVENTION PLANS

PLANNING AND ORGANIZATION Form Pollution Prevention Team Review other plans
ASSESSMENT PHASE Develop a site map Identify potential pollutant sources Inventory of materials and chemicals List significant spills and leaks Identify non-storm water discharges Assess pollutant risks
BEST MANAGEMENT PRACTICES IDENTIFICATION PHASE Non-structural BMPs Structural BMPs Select activity and site-specific BMPs

<p>IMPLEMENTATION PHASE</p> <p>Train employees Implement BMPs Conduct recordkeeping and reporting</p>
--

<p>EVALUATION / MONITORING</p> <p>Conduct annual site evaluation Review monitoring information Evaluate BMPs Review and revise SWPPP</p>

The following information shall be included on the site map:

- A.** The facility boundaries; the outline of all storm water drainage areas within the facility boundaries; portions of the drainage area impacted by run-on from surrounding areas; and direction of flow of each drainage area, on-site surface water bodies, and areas of soil erosion. The map shall also identify nearby water bodies (such as rivers, lakes, and ponds) and municipal storm drain inlets where the facility's storm water discharges and authorized non-storm water discharges may be received.
- B.** The location of the storm water collection and conveyance system, associated points of discharge, and direction of flow. Include any structural control measures that affect storm water discharges, authorized non-storm water discharges, and run-on. Examples of structural control measures are catch basins, berms, detention ponds, secondary containment, oil/water separators, diversion barriers, etc.
- C.** An outline of all impervious areas of the facility, including paved areas, buildings, covered storage areas, or other roofed structures.
- D.** Locations where materials are directly exposed to precipitation and the locations where significant spills or leaks identified in Section A.6.a.iv. below have occurred.
- E.** Areas of industrial activity. This shall include the locations of all storage areas and storage tanks, shipping and receiving areas, fueling areas, vehicle and equipment storage/maintenance areas, material handling and processing areas, waste treatment and disposal areas, dust or particulate generating areas, cleaning and rinsing areas, and other areas of industrial activity which are potential pollutant sources.

V. List of Significant Materials

The SWPPP shall include a list of significant materials handled and stored at the site. For each material on the list, describe the locations where the material is being stored,

received, shipped, and handled, as well as the typical quantities and frequency. Materials shall include raw materials, intermediate products, final or finished products, recycled materials, and waste or disposed materials.

VI. Description of Potential Pollutant Sources

A. The SWPPP shall include a narrative description of the facility's industrial activities, as identified in Section A.4.e above, associated potential pollutant sources, and potential pollutants that could be discharged in storm water discharges or authorized non-storm water discharges. At a minimum, the following items related to a facility's industrial activities shall be considered:

- 1. Industrial Processes.** Describe each industrial process, the type, characteristics, and quantity of significant materials used in or resulting from the process, and a description of the manufacturing, cleaning, rinsing, recycling, disposal, or other activities related to the process. Where applicable, areas protected by containment structures and the corresponding containment capacity shall be described.
- 2. Material Handling and Storage Areas.** Describe each handling and storage area, type, characteristics, and quantity of significant materials handled or stored, description of the shipping, receiving, and loading procedures, and the spill or leak prevention and response procedures. Where applicable, areas protected by containment structures and the corresponding containment capacity shall be described.
- 3. Dust and Particulate Generating Activities.** Describe all industrial activities that generate dust or particulates that may be deposited within the facility's boundaries and identify their discharge locations; the characteristics of dust and particulate pollutants; the approximate quantity of dust and particulate pollutants that may be deposited within the facility boundaries; and a description of the primary areas of the facility where dust and particulate pollutants would settle.
- 4. Significant Spills and Leaks.** Describe materials that have spilled or leaked in significant quantities in storm water discharges or non-storm water discharges since April 17, 1994. Include toxic chemicals (listed in 40 CFR, Part 302) that have been discharged to storm water as reported on U.S. Environmental Protection Agency (USEPA) Form R, and oil and hazardous substances in excess of reportable quantities (see 40 Code of Federal Regulations [CFR], Parts 110, 117, and 302).

The description shall include the type, characteristics, and approximate quantity of the material spilled or leaked, the cleanup or remedial actions that have occurred or are planned, the approximate remaining quantity of materials that may be exposed to storm water or non-storm water discharges, and the preventative measures taken to ensure spill or leaks do not reoccur. Such list shall be updated as appropriate during the term of this Permit.

- 5. Non-Storm Water Discharges.** Facility operators shall investigate the facility to identify all non-storm water discharges and their sources. As part of this investigation, all drains (inlets and outlets) shall be evaluated to identify whether they connect to the storm drain system.

All non-storm water discharges shall be described. This shall include the source, quantity, frequency, and characteristics of the non-storm water discharges and associated drainage area.

Non-storm water discharges (other boiler blowdown and boiler condensate permitted under the Order) that contain significant quantities of pollutants or that do not meet the conditions provided in Special Conditions D of the storm water general permit are prohibited by this Permit (Examples of prohibited non-storm water discharges are contact and non-contact cooling water, rinse water, wash water, etc.). Non-storm water discharges that meet the conditions provided in Special Condition D of the general storm water permit are authorized by this Permit. The SWPPP must include BMPs to prevent or reduce contact of non-storm water discharges with significant materials or equipment.

- 6. Soil Erosion.** Describe the facility locations where soil erosion may occur as a result of industrial activity, storm water discharges associated with industrial activity, or authorized non-storm water discharges.

- B.** The SWPPP shall include a summary of all areas of industrial activities, potential pollutant sources, and potential pollutants. This information should be summarized similar to Table B. The last column of Table B, "Control Practices", should be completed in accordance with Section A.8. below.

VII. Assessment of Potential Pollutant Sources

- A.** The SWPPP shall include a narrative assessment of all industrial activities and potential pollutant sources as described in A.6. above to determine:
- 1.** Which areas of the facility are likely sources of pollutants in storm water discharges and authorized non-storm water discharges, and
 - 2.** Which pollutants are likely to be present in storm water discharges and authorized non-storm water discharges. Facility operators shall consider and evaluate various factors when performing this assessment such as current storm water BMPs; quantities of significant materials handled, produced, stored, or disposed of; likelihood of exposure to storm water or authorized non-storm water discharges; history of spill or leaks; and run-on from outside sources.
- B.** Facility operators shall summarize the areas of the facility that are likely sources of pollutants and the corresponding pollutants that are likely to be present in storm water discharges and authorized non-storm water discharges.

Facility operators are required to develop and implement additional BMPs as appropriate and necessary to prevent or reduce pollutants associated with each pollutant source. The BMPs will be narratively described in Section 8 below.

VIII. Storm Water Best Management Practices

The SWPPP shall include a narrative description of the storm water BMPs to be implemented at the facility for each potential pollutant and its source identified in the site assessment phase (Sections A.6. and 7. above). The BMPs shall be developed and implemented to reduce or prevent pollutants in storm water discharges and authorized non-storm water discharges. Each pollutant and its source may require one or more BMPs. Some BMPs may be implemented for multiple pollutants and their sources, while other BMPs will be implemented for a very specific pollutant and its source.

TABLE B
EXAMPLE
ASSESSMENT OF POTENTIAL POLLUTION SOURCES AND
CORRESPONDING BEST MANAGEMENT PRACTICES
SUMMARY

Area	Activity	Pollutant Source	Pollutant	Best Management Practices
Vehicle & Equipment Fueling	Fueling	Spills and leaks during delivery. Spills caused by topping off fuel tanks. Hosing or washing down fuel oil fuel area. Leaking storage tanks. Rainfall running off fuel oil, and rainfall running onto and off fueling area.	fuel oil	Use spill and overflow protection. Minimize run-on of storm water into the fueling area. Cover fueling area. Use dry cleanup methods rather than hosing down area. Implement proper spill prevention control program. Implement adequate preventative maintenance program to preventive tank and line leaks. Inspect fueling areas regularly to detect problems before they occur. Train employees on proper fueling, cleanup, and spill response techniques.

The description of the BMPs shall identify the BMPs as (1) existing BMPs, (2) existing BMPs to be revised and implemented, or (3) new BMPs to be implemented. The

description shall also include a discussion on the effectiveness of each BMP to reduce or prevent pollutants in storm water discharges and authorized non-storm water discharges. The SWPPP shall provide a summary of all BMPs implemented for each pollutant source. This information should be summarized similar to Table B.

Facility operators shall consider the following BMPs for implementation at the facility:

A. Non-Structural BMPs

Non-structural BMPs generally consist of processes, prohibitions, procedures, schedule of activities, etc., that prevent pollutants associated with industrial activity from contacting with storm water discharges and authorized non-storm water discharges. They are considered low technology, cost-effective measures. Facility operators should consider all possible non-structural BMPs options before considering additional structural BMPs (see Section A.8.b. below). Below is a list of non-structural BMPs that should be considered:

1. **Good Housekeeping.** Good housekeeping generally consists of practical procedures to maintain a clean and orderly facility.
2. **Preventive Maintenance.** Preventive maintenance includes the regular inspection and maintenance of structural storm water controls (catch basins, oil/water separators, etc.) as well as other facility equipment and systems.
3. **Spill Response.** This includes spill clean-up procedures and necessary clean-up equipment based upon the quantities and locations of significant materials that may spill or leak.
4. **Material Handling and Storage.** This includes all procedures to minimize the potential for spills and leaks and to minimize exposure of significant materials to storm water and authorized non-storm water discharges.
5. **Employee Training.** This includes training of personnel who are responsible for (1) implementing activities identified in the SWPPP, (2) conducting inspections, sampling, and visual observations, and (3) managing storm water. Training should address topics such as spill response, good housekeeping, and material handling procedures, and actions necessary to implement all BMPs identified in the SWPPP. The SWPPP shall identify periodic dates for such training. Records shall be maintained of all training sessions held.
6. **Waste Handling/Recycling.** This includes the procedures or processes to handle, store, or dispose of waste materials or recyclable materials.
7. **Recordkeeping and Internal Reporting.** This includes the procedures to ensure that all records of inspections, spills, maintenance activities, corrective actions, visual observations, etc., are developed, retained, and provided, as necessary, to the appropriate facility personnel.

- 8. Erosion Control and Site Stabilization.** This includes a description of all sediment and erosion control activities. This may include the planting and maintenance of vegetation, diversion of run-on and runoff, placement of sandbags, silt screens, or other sediment control devices, etc.
- 9. Inspections.** This includes, in addition to the preventative maintenance inspections identified above, an inspection schedule of all potential pollutant sources. Tracking and follow-up procedures shall be described to ensure adequate corrective actions are taken and SWPPPs are made.
- 10. Quality Assurance.** This includes the procedures to ensure that all elements of the SWPPP and Monitoring Program are adequately conducted.

B. Structural BMPs.

Where non-structural BMPs as identified in Section A.8.a. above are not effective, structural BMPs shall be considered. Structural BMPs generally consist of structural devices that reduce or prevent pollutants in storm water discharges and authorized non-storm water discharges. Below is a list of structural BMPs that should be considered:

- 1. Overhead Coverage.** This includes structures that provide horizontal coverage of materials, chemicals, and pollutant sources from contact with storm water and authorized non-storm water discharges.
- 2. Retention Ponds.** This includes basins, ponds, surface impoundments, bermed areas, etc. that do not allow storm water to discharge from the facility.
- 3. Control Devices.** This includes berms or other devices that channel or route run-on and runoff away from pollutant sources.
- 4. Secondary Containment Structures.** This generally includes containment structures around storage tanks and other areas for the purpose of collecting any leaks or spills.
- 5. Treatment.** This includes inlet controls, infiltration devices, oil/water separators, detention ponds, vegetative swales, etc. that reduce the pollutants in storm water discharges and authorized non-storm water discharges.

IX. Annual Comprehensive Site Compliance Evaluation

The facility operator shall conduct one comprehensive site compliance evaluation (evaluation) in each reporting period (July 1-June 30). Evaluations shall be conducted within 8-16 months of each other. The SWPPP shall be revised, as appropriate, and the revisions implemented within 90 days of the evaluation. Evaluations shall include the following:

- A.** A review of all visual observation records, inspection records, and sampling and analysis results.
- B.** A visual inspection of all potential pollutant sources for evidence of, or the potential for, pollutants entering the drainage system.
- C.** A review and evaluation of all BMPs (both structural and non-structural) to determine whether the BMPs are adequate, properly implemented and maintained, or whether additional BMPs are needed. A visual inspection of equipment needed to implement the SWPPP, such as spill response equipment, shall be included.
- D.** An evaluation report that includes, (i) identification of personnel performing the evaluation, (ii) the date(s) of the evaluation, (iii) necessary SWPPP revisions, (iv) schedule, as required in Section A.10.e, for implementing SWPPP revisions, (v) any incidents of non-compliance and the corrective actions taken, and (vi) a certification that the facility operator is in compliance with this Permit. If the above certification cannot be provided, explain in the evaluation report why the facility operator is not in compliance with this Permit. The evaluation report shall be submitted as part of the annual report, retained for at least five years, and signed and certified in accordance with Standard Provisions V.D.5 of Attachment D.

X. SWPPP General Requirements

- A.** The SWPPP shall be retained on site and made available upon request of a representative of the Regional Water Board and/or local storm water management agency (local agency) which receives the storm water discharges.
- B.** The Regional Water Board and/or local agency may notify the facility operator when the SWPPP does not meet one or more of the minimum requirements of this Section. As requested by the Regional Water Board and/or local agency, the facility operator shall submit an SWPPP revision and implementation schedule that meets the minimum requirements of this section to the Regional Water Board and/or local agency that requested the SWPPP revisions. Within 14 days after implementing the required SWPPP revisions, the facility operator shall provide written certification to the Regional Water Board and/or local agency that the revisions have been implemented.
- C.** The SWPPP shall be revised, as appropriate, and implemented prior to changes in industrial activities which (i) may significantly increase the quantities of pollutants in storm water discharge, (ii) cause a new area of industrial activity at the facility to be exposed to storm water, or (iii) begin an industrial activity which would introduce a new pollutant source at the facility.
- D.** The SWPPP shall be revised and implemented in a timely manner, but in no case more than 90 days after a facility operator determines that the SWPPP is in violation of any requirement(s) of this Permit.

- E.** When any part of the SWPPP is infeasible to implement due to proposed significant structural changes, the facility operator shall submit a report to the Regional Water Board prior to the applicable deadline that (i) describes the portion of the SWPPP that is infeasible to implement by the deadline, (ii) provides justification for a time extension, (iii) provides a schedule for completing and implementing that portion of the SWPPP, and (iv) describes the BMPs that will be implemented in the interim period to reduce or prevent pollutants in storm water discharges and authorized non-storm water discharges. Such reports are subject to Regional Water Board approval and/or modifications. Facility operators shall provide written notification to the Regional Water Board within 14 days after the SWPPP revisions are implemented.
- F.** The SWPPP shall be provided, upon request, to the Regional Water Board. The SWPPP is considered a report that shall be available to the public by the Regional Water Board under Section 308(b) of the Clean Water Act.

ATTACHMENT H – STATE WATER BOARD MINIMUM LEVELS

The Minimum Levels (MLs) in ppb ($\mu\text{g/L}$) in this appendix are for use in reporting and compliance determination purposes in accordance with section 2.4 of the State Implementation Policy. These MLs were derived from data for priority pollutants provided by State certified analytical laboratories in 1997 and 1998. These MLs shall be used until new values are adopted by the State Water Board and become effective. The following tables (Tables 2a - 2d) present MLs for four major chemical groupings: volatile substances, semi-volatile substances, inorganics, and pesticides and PCBs.

Table 2a - VOLATILE SUBSTANCES*	GC	GCMS
1,1 Dichloroethane	0.5	1
1,1 Dichloroethylene	0.5	2
1,1,1 Trichloroethane	0.5	2
1,1,2 Trichloroethane	0.5	2
1,1,2,2 Tetrachloroethane	0.5	1
1,2 Dichlorobenzene (volatile)	0.5	2
1,2 Dichloroethane	0.5	2
1,2 Dichloropropane	0.5	1
1,3 Dichlorobenzene (volatile)	0.5	2
1,3 Dichloropropene (volatile)	0.5	2
1,4 Dichlorobenzene (volatile)	0.5	2
Acrolein	2.0	5
Acrylonitrile	2.0	2
Benzene	0.5	2
Bromoform	0.5	2
Methyl Bromide	1.0	2
Carbon Tetrachloride	0.5	2
Chlorobenzene	0.5	2
Chlorodibromo-methane	0.5	2
Chloroethane	0.5	2
Chloroform	0.5	2
Chloromethane	0.5	2
Dichlorobromo-methane	0.5	2
Dichloromethane	0.5	2
Ethylbenzene	0.5	2
Tetrachloroethylene	0.5	2
Toluene	0.5	2
Trans-1,2 Dichloroethylene	0.5	1
Trichloroethene	0.5	2
Vinyl Chloride	0.5	2

*The normal method-specific factor for these substances is 1; therefore, the lowest standard concentration in the calibration curve is equal to the above ML value for each substance.

Table 2b - SEMI-VOLATILE SUBSTANCES*	GC	GCMS	LC	COLOR
Benzo (a) Anthracene	10	5		
1,2 Dichlorobenzene (semivolatile)	2	2		
1,2 Diphenylhydrazine		1		
1,2,4 Trichlorobenzene	1	5		
1,3 Dichlorobenzene (semivolatile)	2	1		
1,4 Dichlorobenzene (semivolatile)	2	1		
2 Chlorophenol	2	5		
2,4 Dichlorophenol	1	5		
2,4 Dimethylphenol	1	2		
2,4 Dinitrophenol	5	5		
2,4 Dinitrotoluene	10	5		
2,4,6 Trichlorophenol	10	10		
2,6 Dinitrotoluene		5		
2- Nitrophenol		10		
2-Chloroethyl vinyl ether	1	1		
2-Chloronaphthalene		10		
3,3' Dichlorobenzidine		5		
Benzo (b) Fluoranthene		10	10	
3-Methyl-Chlorophenol	5	1		
4,6 Dinitro-2-methylphenol	10	5		
4- Nitrophenol	5	10		
4-Bromophenyl phenyl ether	10	5		
4-Chlorophenyl phenyl ether		5		
Acenaphthene	1	1	0.5	
Acenaphthylene		10	0.2	
Anthracene		10	2	
Benzidine		5		
Benzo(a) pyrene		10	2	
Benzo(g,h,i)perylene		5	0.1	
Benzo(k)fluoranthene		10	2	
bis 2-(1-Chloroethoxyl) methane		5		
bis(2-chloroethyl) ether	10	1		
bis(2-Chloroisopropyl) ether	10	2		
bis(2-Ethylhexyl) phthalate	10	5		
Butyl benzyl phthalate	10	10		
Chrysene		10	5	
di-n-Butyl phthalate		10		
di-n-Octyl phthalate		10		
Dibenzo(a,h)-anthracene		10	0.1	
Diethyl phthalate	10	2		
Dimethyl phthalate	10	2		
Fluoranthene	10	1	0.05	
Fluorene		10	0.1	
Hexachloro-cyclopentadiene	5	5		
Hexachlorobenzene	5	1		
Hexachlorobutadiene	5	1		
Hexachloroethane	5	1		
Indeno(1,2,3,cd)-pyrene		10	0.05	
Isophorone	10	1		
N-Nitroso diphenyl amine	10	1		
N-Nitroso-dimethyl amine	10	5		

Table 2b - SEMI-VOLATILE SUBSTANCES*	GC	GCMS	LC	COLOR
N-Nitroso -di n-propyl amine	10	5		
Naphthalene	10	1	0.2	
Nitrobenzene	10	1		
Pentachlorophenol	1	5		
Phenanthrene		5	0.05	
Phenol **	1	1		50
Pyrene		10	0.05	

* With the exception of phenol by colorimetric technique, the normal method-specific factor for these substances is 1,000; therefore, the lowest standard concentration in the calibration curve is equal to the above ML value for each substance multiplied by 1,000.

** Phenol by colorimetric technique has a factor of 1.

Table 2c – INORGANICS*	FAA	GFAA	ICP	ICPMS	SPGFAA	HYDRIDE	CVAA	COLOR	DCP
Antimony	10	5	50	0.5	5	0.5			1,000
Arsenic		2	10	2	2	1		20	1,000
Beryllium	20	0.5	2	0.5	1				1,000
Cadmium	10	0.5	10	0.25	0.5				1,000
Chromium (total)	50	2	10	0.5	1				1,000
Chromium VI	5							10	
Copper	25	5	10	0.5	2				1,000
Cyanide								5	
Lead	20	5	5	0.5	2				10,000
Mercury				0.5			0.2		
Nickel	50	5	20	1	5				1,000
Selenium		5	10	2	5	1			1,000
Silver	10	1	10	0.25	2				1,000
Thallium	10	2	10	1	5				1,000
Zinc	20		20	1	10				1,000

* The normal method-specific factor for these substances is 1; therefore, the lowest standard concentration in the calibration curve is equal to the above ML value for each substance.

Table 2d – PESTICIDES – PCBs*	GC
4,4'-DDD	0.05
4,4'-DDE	0.05
4,4'-DDT	0.01
a-Endosulfan	0.02
alpha-BHC	0.01
Aldrin	0.005
b-Endosulfan	0.01
Beta-BHC	0.005
Chlordane	0.1
Delta-BHC	0.005
Dieldrin	0.01
Endosulfan Sulfate	0.05
Endrin	0.01

Table 2d – PESTICIDES – PCBs*	GC
Endrin Aldehyde	0.01
Heptachlor	0.01
Heptachlor Epoxide	0.01
Gamma-BHC (Lindane)	0.02
PCB 1016	0.5
PCB 1221	0.5
PCB 1232	0.5
PCB 1242	0.5
PCB 1248	0.5
PCB 1254	0.5
PCB 1260	0.5
Toxaphene	0.5

* The normal method-specific factor for these substances is 100; therefore, the lowest standard concentration in the calibration curve is equal to the above ML value for each substance multiplied by 100.

Techniques:

- GC - Gas Chromatography
- GCMS - Gas Chromatography/Mass Spectrometry
- HRGCMS - High Resolution Gas Chromatography/Mass Spectrometry (i.e., EPA 1613, 1624, or 1625)
- LC - High Pressure Liquid Chromatography
- FAA - Flame Atomic Absorption
- GFAA - Graphite Furnace Atomic Absorption
- HYDRIDE - Gaseous Hydride Atomic Absorption
- CVAA - Cold Vapor Atomic Absorption
- ICP - Inductively Coupled Plasma
- ICPMS - Inductively Coupled Plasma/Mass Spectrometry
- SPGFAA - Stabilized Platform Graphite Furnace Atomic Absorption (i.e., EPA 200.9)
- DCP - Direct Current Plasma
- COLOR – Colorimetric

ATTACHMENT I – LIST OF PRIORITY POLLUTANTS

CTR Number	Parameter	CAS Number	Suggested Analytical Methods
1	Antimony	7440360	1
2	Arsenic	7440382	1
3	Beryllium	7440417	1
4	Cadmium	7440439	1
5a	Chromium (III)	16065831	1
5a	Chromium (VI)	18540299	1
6	Copper	7440508	1
7	Lead	7439921	1
8	Mercury	7439976	1
9	Nickel	7440020	1
10	Selenium	7782492	1
11	Silver	7440224	1
12	Thallium	7440280	1
13	Zinc	7440666	1
14	Cyanide	57125	1
15	Asbestos	1332214	1
16	2,3,7,8-TCDD	1746016	1
17	Acrolein	107028	1
18	Acrylonitrile	107131	1
19	Benzene	71432	1
20	Bromoform	75252	1
21	Carbon Tetrachloride	56235	1
22	Chlorobenzene	108907	1
23	Chlorodibromomethane	124481	1
24	Chloroethane	75003	1
25	2-Chloroethylvinyl Ether	110758	1
26	Chloroform	67663	1
27	Dichlorobromomethane	75274	1
28	1,1-Dichloroethane	75343	1
29	1,2-Dichloroethane	107062	1
30	1,1-Dichloroethylene	75354	1
31	1,2-Dichloropropane	78875	1
32	1,3-Dichloropropylene	542756	1
33	Ethylbenzene	100414	1
34	Methyl Bromide	74839	1
35	Methyl Chloride	74873	1
36	Methylene Chloride	75092	1
37	1,1,2,2-Tetrachloroethane	79345	1
38	Tetrachloroethylene	127184	1
39	Toluene	108883	1
40	1,2-Trans-Dichloroethylene	156605	1
41	1,1,1-Trichloroethane	71556	1
42	1,1,2-Trichloroethane	79005	1
43	Trichloroethylene	79016	1

CTR Number	Parameter	CAS Number	Suggested Analytical Methods
44	Vinyl Chloride	75014	1
45	2-Chlorophenol	95578	1
46	2,4-Dichlorophenol	120832	1
47	2,4-Dimethylphenol	105679	1
48	2-Methyl-4,6-Dinitrophenol	534521	1
49	2,4-Dinitrophenol	51285	1
50	2-Nitrophenol	88755	1
51	4-Nitrophenol	100027	1
52	3-Methyl-4-Chlorophenol	59507	1
53	Pentachlorophenol	87865	1
54	Phenol	108952	1
55	2,4,6-Trichlorophenol	88062	1
56	Acenaphthene	83329	1
57	Acenaphthylene	208968	1
58	Anthracene	120127	1
59	Benzidine	92875	1
60	Benzo(a)Anthracene	56553	1
61	Benzo(a)Pyrene	50328	1
62	Benzo(b)Fluoranthene	205992	1
63	Benzo(ghi)Perylene	191242	1
64	Benzo(k)Fluoranthene	207089	1
65	Bis(2-Chloroethoxy)Methane	111911	1
66	Bis(2-Chloroethyl)Ether	111444	1
67	Bis(2-Chloroisopropyl)Ether	108601	1
68	Bis(2-Ethylhexyl)Phthalate	117817	1
69	4-Bromophenyl Phenyl Ether	101553	1
70	Butylbenzyl Phthalate	85687	1
71	2-Chloronaphthalene	91587	1
72	4-Chlorophenyl Phenyl Ether	7005723	1
73	Chrysene	218019	1
74	Dibenzo(a,h)Anthracene	53703	1
75	1,2-Dichlorobenzene	95501	1
76	1,3-Dichlorobenzene	541731	1
77	1,4-Dichlorobenzene	106467	1
78	3,3'-Dichlorobenzidine	91941	1
79	Diethyl Phthalate	84662	1
80	Dimethyl Phthalate	131113	1
81	Di-n-Butyl Phthalate	84742	1
82	2,4-Dinitrotoluene	121142	1
83	2,6-Dinitrotoluene	606202	1
84	Di-n-Octyl Phthalate	117840	1
85	1,2-Diphenylhydrazine	122667	1
86	Fluoranthene	206440	1
87	Fluorene	86737	1
88	Hexachlorobenzene	118741	1

CTR Number	Parameter	CAS Number	Suggested Analytical Methods
89	Hexachlorobutadiene	87863	†
90	Hexachlorocyclopentadiene	77474	†
91	Hexachloroethane	67721	†
92	Indeno(1,2,3-cd)Pyrene	193395	†
93	Isophorone	78591	†
94	Naphthalene	91203	†
95	Nitrobenzene	98953	†
96	N-Nitrosodimethylamine	62759	†
97	N-Nitrosodi-n-Propylamine	621647	†
98	N-Nitrosodiphenylamine	86306	†
99	Phenanthrene	85018	†
100	Pyrene	129000	†
101	1,2,4-Trichlorobenzene	120821	†
102	Aldrin	309002	†
103	alpha-BHC	319846	†
104	beta-BHC	319857	†
105	gamma-BHC	58899	†
106	delta-BHC	319868	†
107	Chlordane	57749	†
108	4,4'-DDT	50293	†
109	4,4'-DDE	72559	†
110	4,4'-DDD	72548	†
111	Dieldrin	60571	†
112	alpha-Endosulfan	959988	†
113	beta-Endosulfan	33213659	†
114	Endosulfan Sulfate	1031078	†
115	Endrin	72208	†
116	Endrin Aldehyde	7421934	†
117	Heptachlor	76448	†
118	Heptachlor Epoxide	1024573	†
119	PCB-1016	12674112	†
120	PCB-1221	11104282	†
121	PCB-1232	11141165	†
122	PCB-1242	53469219	†
123	PCB-1248	12672296	†
124	PCB-1254	11097691	†
125	PCB-1260	11096825	†
126	Toxaphene	8001352	†

¹ Pollutants shall be analyzed using the methods described in 40 CFR Part 136.

**ATTACHMENT J - SUMMARY OF REASONABLE POTENTIAL ANALYSIS AND WQBEL
CALCULATIONS**